

Mini-Circuits®

CERAMIC BALUN

RF Transformer

NCS1.5-232+

50Ω 400 to 2300 MHz 1:1.5 Ratio

FEATURES

- Wideband, 400 to 2300 MHz
- Low phase unbalance, 5 deg. and amplitude unbalance, 0.9 dB typ.
- Miniature size 0805 (2.0x1.23mm)
- LTCC construction
- Low cost
- Aqueous washable

APPLICATIONS

- WCDMA
- PCS
- GPS
- ISM
- WLAN
- UHF
- LTE
- Cellular



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-9

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (Secondary/Primary)			1.5		
Frequency Range		400		2300	MHz
Insertion Loss ¹	400 - 2300	—	1.2	1.6	dB
Amplitude Unbalance	400 - 2300	—	0.8	1.5	dB
	1650 - 1950	—	0.5	1.0	
Phase Unbalance ²	400 - 2300	—	8	12	Degree
	1650 - 1950	—	3	9	

1. Reference Demo Board TB-626+


2. Relative to 180°

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power ³	2W at 25°C

3. Passband rating, derate linearly to 1W at 100°C ambient
Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION J

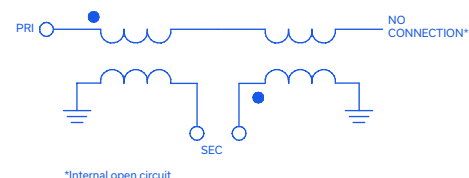


Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
ECO-010420
NCS1.5-232+
MCL NY
211101

PAGE 1 OF 3



Mini-Circuits

CERAMIC BALUN

RF Transformer


NCS1.5-232+

PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	2
PRIMARY (GND)	1,3
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION	5

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-626+ SUGGESTED PCB LAYOUT (PL-348)

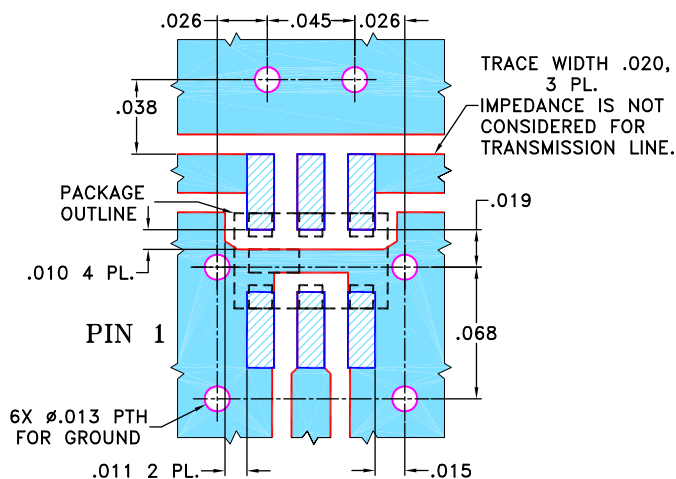


NOTES:


1. TRACE WIDTH IS SHOWN FOR REFERENCE ONLY.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

	DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
	DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

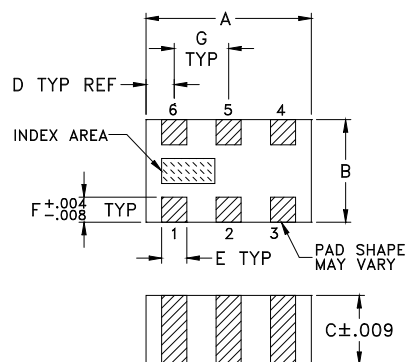

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.0	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	




TAPE & REEL INFORMATION: F74



TYPICAL PERFORMANCE DATA³

Frequency (MHz)	Insertion Loss (dB)	Input Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
400	1.03	11.76	0.53	7.45
500	0.75	15.77	0.65	8.20
600	0.66	18.11	0.78	8.64
1000	0.65	18.24	0.86	8.08
1200	0.68	18.23	0.76	6.96
1650	0.78	18.84	0.31	2.53
1950	0.90	17.26	0.09	2.35
2100	0.98	15.94	0.25	5.50
2200	1.05	15.14	0.35	7.81
2300	1.12	14.44	0.43	10.26

3. Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

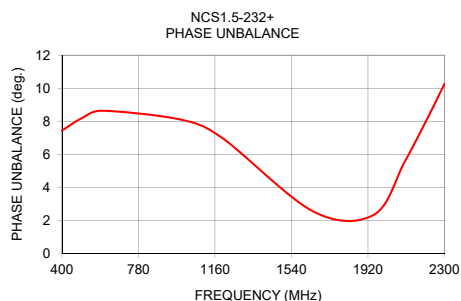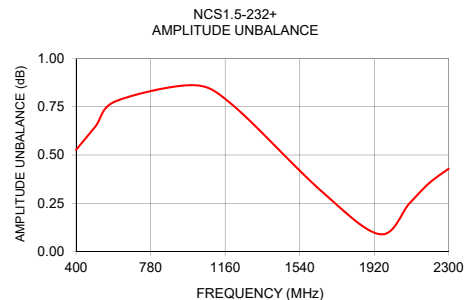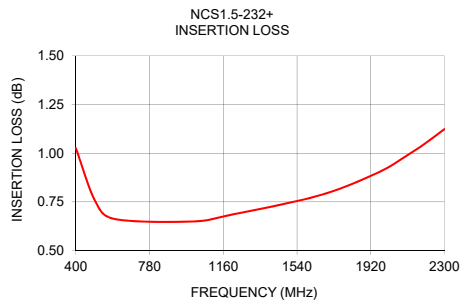

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[NCS1.5-232+](#)