


Test Procedure for the NV890100PDR2GEVB Evaluation Board

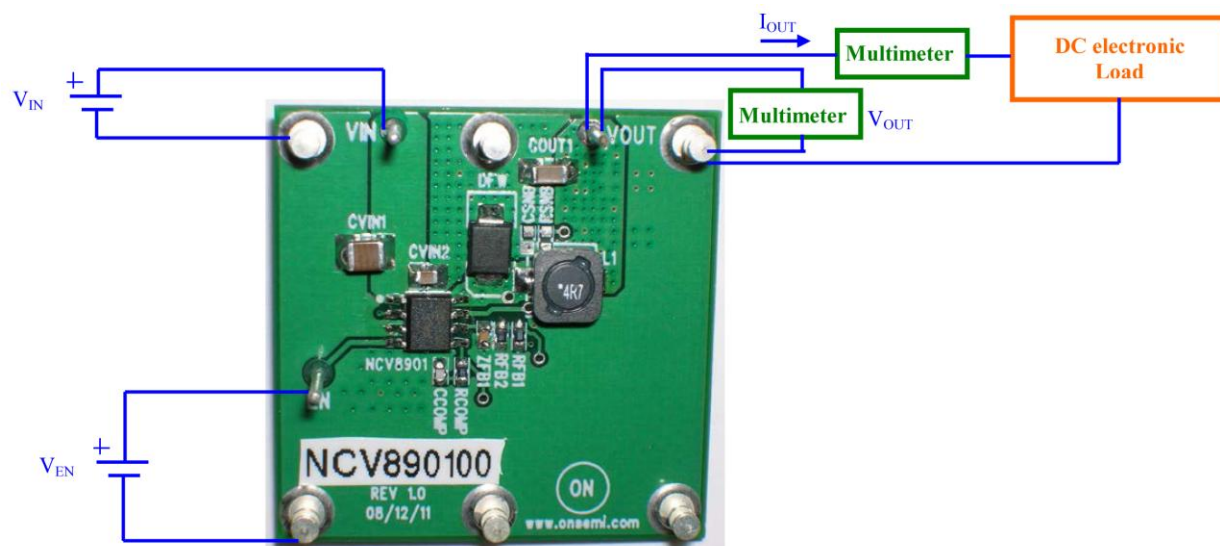

Required Equipment:

2 x DC voltage source
1 x DC electronic load
2 x Multimeters

Rev 1.0 Page 2 September 6, 2012

**Test Procedure:**

1. Connect the test setup as shown above.
2. Make sure the load is not enabled.
3. Apply an enable voltage $V_{EN}=0V$. Apply an input voltage, $V_{IN} = 13.2 V$. V_{OUT} should be 0V.
4. Apply an enable voltage $V_{EN}=3V$. Verify that the output voltage is 3.3 V +/-0.15 V.
5. Set up the load to 1.2A and enable it. Verify that the output voltage is still 3.3 V +/-0.15 V.
6. Change the input voltage to 36 V. Verify that the output voltage is 3.3 V +/-0.15 V.
7. Change the input voltage to 6 V. Verify that the output voltage is 3.3 V +/-0.15 V.
8. Change the input voltage to 3.9 V. Verify that the output voltage is 0 V.
9. Change the input voltage to 6 V. Verify that the output voltage is 3.3 V +/-0.15 V.
10. Apply an enable voltage $V_{EN}=0V$. V_{OUT} should be 0V.
11. Turn off the DC sources.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi:](#)

[NV890100PDR2GEVB](#)