

Bandpass Filter

50Ω 186 to 340 MHz

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W at 25°C

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

RF IN 2

RF OUT 6

GROUND 1,3,4,5,7,8

Outline Drawing

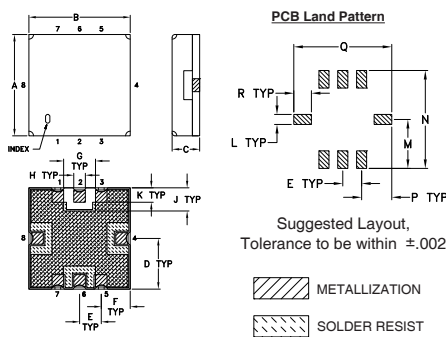

Outline Dimensions (inch/mm)


A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03

K	L	M	N	P	Q	R	wt
.050	.040	.195	.390	.120	.390	.070	grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25

Note: Please refer to case style drawing for details

Demo Board MCL P/N: TB-332

Suggested PCB Layout (PL-176)

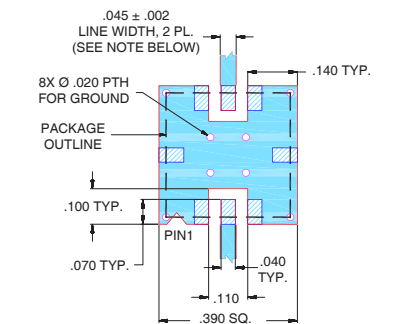

Features

- good VSWR, 1.7:1 typ. @ passband
- small size 0.35" x 0.35"
- shielded case
- aqueous washable

Applications

- harmonic rejection
- transmitters / receivers
- navigation

RBP-253+



Generic photo used for illustration purposes only

CASE STYLE: GP731

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500, 1000


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 35dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
253	186 - 340	140	440	120	500 - 3000	1.7	2.1	18

Typical Frequency Response


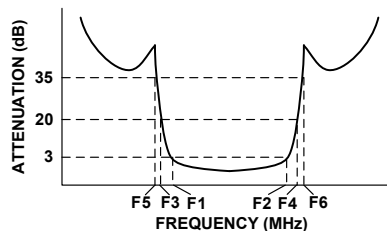


Functional Schematic

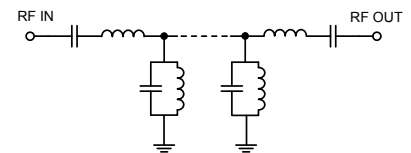

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
0.3	97.50	1737.18
50	81.95	868.59
120	41.47	133.63
140	28.14	54.29
163	10.51	9.53
170	5.40	3.68
186	1.82	1.47
253	1.17	1.34
263	1.28	1.52
300	1.35	1.51
340	1.82	1.45
345	2.16	1.69
362	5.38	4.23
380	11.59	11.61
440	29.39	43.44
500	40.20	72.39
2000	78.34	59.91
3000	47.45	45.72

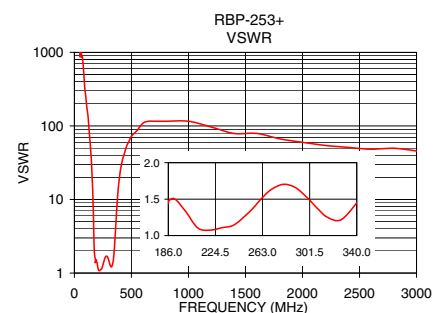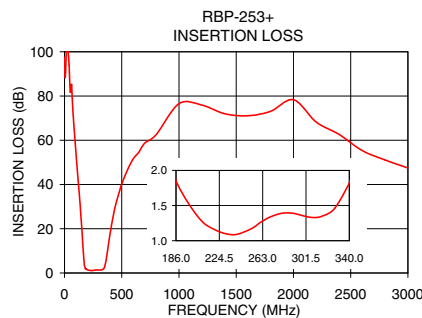

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[RBP-253+](#)