

Panasonic ideas for life



() Several part numbers will be discontinued September 30, 2013.

FEATURES

1. ① Lineup now includes high breakdown voltage type that achieves breakdown voltage between open contacts of 1,500 V AC.

Surge breakdown voltage between open contacts:

1,500 V 10 \times 160 μ sec. (FCC part 68) Surge breakdown voltage between contact and coil:

6,000 V 1.2 \times 50 µsec. (EN60950)

2. Approved to the supplementary insulation class in the EN standards (EN60950).

The insulation distance between the contact and coil meet the supplementary insulation class of the EN60950 standards as required for equipment connected to the telephone lines in Europe.

Satisfies the following conditions:

- Clearances: 2.0 mm .079 inch or more
- Creepage distance: 2.5 mm .098 inch or more

High breakdown voltage type is available (1.5 kV between open contacts)

- 3. (1) 3,000 V breakdown voltage between contact and coil. (Surge breakdown voltage 6,000 V type) The body block construction of the coil that is sealed formation offers a high breakdown voltage of 3,000 V between contact and coil.
- 4. Nominal operating power: High sensitivity of 200 mW By using the highly efficient polar magnetic circuit "seesaw balance mechanism", a nominal operating power of 200 mW has been achieved.
- 5. High contact capacity: 2 A 30 V DC
- 6. High contact reliability achieved with gold-clad crossbar twin contacts and the use of gas expelling materials during formation.

*We also offer TX-series relays with AgPd contacts, suitable for use in low level load analog circuits.

7. Outstanding vibration and shock resistance.

Functional shock resistance: 750 m/s² Destructive shock resistance: 1,000 m/s²

Functional vibration resistance: 10 to 55 Hz (at double amplitude of 3.3 mm .130 inch)

Destructive vibration resistance: 10 to 55 Hz (at double amplitude of 5 mm .197 inch)

- 8. Sealed construction allows automatic washing.
- 9. A range of surface-mount types is also available.

SA: Low-profile surface-mount terminal type SS: Space saving surface-mount terminal type

10. M.B.B. type available (Surge breakdown voltage 2,500 V type only)

TX-D RELAYS

TYPICAL APPLICATIONS

- 1. Facsimile
- 2. Modem
- 3. Communications (xDSL)
- 4. Medical equipment
- 5. Automotive equipment
- 6. Security

ORDERING INFORMATION

TXD 2		_	_	[-
Contact arrangement 2: 2 Form C					
Surface-mount availability Nil: Standard PC board terminal SA: SA type SS: SS type					
Operating function Nil: Single side stable L: 1 coil latching					
Type of operation Nil: Standard type 2M: M.B.B. type (Surge breakdown voltage 2,500 V and Single side stable type only)					
Terminal shape Nil: Standard PC board terminal or surface-mount terminal					
Nominal coil voltage (DC) 1.5, 3, 4.5, 5, 6, 9, 12, 24V					
Contact material/Surge breakdown voltage (between contact and coil)/Breakdown (between open Nil: Standard contact (Ag+Au clad), 2,500 V/1,000 V 1: AgPd contact (low level load); AgPd+Au clad (stationary), AgPd (movable), 2,500 V/1,000 V 3: Standard contact (Ag+Au clad), 6,000 V/1,500 V 4: AgPd contact (low level load); AgPd+Au clad (stationary), AgPd (movable), 6,000 V/1,500 V 6: Standard contact (Ag+Au clad), 6,000 V/1,000 V 7: AgPd contact (low level load); AgPd+Au clad (stationary), AgPd (movable), 6,000 V/1,000 V	/ / (Discon		pt. 30, 20 ⁻	13)	
Packing style Nil: Tube packing X: Tape and reel (picked from 1/3/4/5-pin side) Z: Tape and reel packing (Picked from the 8/9/10/12-pin side)					

se of 5 V transistor drive circuit, it is recommended to use 4.5 V type relay.

() Several part numbers will be discontinued September 30, 2013.

TYPES

1. Standard (B.B.M.) type/Surge breakdown voltage (between contact and coil) 2,500 V/ Breakdown voltage (between open contacts) 1,000 V

1) Standard PC board terminal

Contact	Nominal coil	Single side stable	1 coil latching
arrangement	voltage	Part No.	Part No.
	1.5V DC	TXD2-1.5V	TXD2-L-1.5V
	3V DC	TXD2-3V	TXD2-L-3V
	4.5V DC	TXD2-4.5V	TXD2-L-4.5V
2 Form C	5V DC	TXD2-5V	TXD2-L-5V
2 Form C	6V DC	TXD2-6V	TXD2-L-6V
	9V DC	TXD2-9V	TXD2-L-9V
	12V DC	TXD2-12V	TXD2-L-12V
	24V DC	TXD2-24V	TXD2-L-24V

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs. Note: Please add "-1" to the end of the part number for AgPd contacts (low level load).

2) Surface-mount terminal

(1) Tube	packing
----------	---------

Contact	Nominal coil	Single side stable	1 coil latching
arrangement	voltage	Part No.	Part No.
	1.5V DC	TXD2SQ-1.5V	TXD2SQ-L-1.5V
	3V DC	TXD2SQ-3V	TXD2S□-L-3V
4.5V DC 5V DC	4.5V DC	TXD2SQ-4.5V	TXD2SD-L-4.5V
	5V DC	TXD2SQ-5V	TXD2SQ-L-5V
2 Form C	6V DC	TXD2SQ-6V	TXD2S□-L-6V
	9V DC	TXD2SD-9V	TXD2S□-L-9V
	12V DC	TXD2SQ-12V	TXD2SQ-L-12V
	24V DC	TXD2SQ-24V	TXD2S□-L-24V

□: For each surface-mount terminal identification, input the following letter. SA type: <u>A</u>, SS type: <u>S</u>

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs. Note: Please add "-1" to the end of the part number for AgPd contacts (low level load).

Several part numbers will be discontinued September 30, 2013.

(2) Tape and reel packing

Contact	Nominal coil	Single side stable	1 coil latching
arrangement	voltage	Part No.	Part No.
	1.5V DC	TXD2SQ-1.5V-Z	TXD2S□-L-1.5V-Z
	3V DC	TXD2SQ-3V-Z	TXD2S□-L-3V-Z
	4.5V DC	TXD2SQ-4.5V-Z	TXD2S□-L-4.5V-Z
2 Form C	5V DC	TXD2SQ-5V-Z	TXD2S□-L-5V-Z
2 FOIIII C	6V DC	TXD2SQ-6V-Z	TXD2S□-L-6V-Z
	9V DC	TXD2SQ-9V-Z	TXD2S□-L-9V-Z
	12V DC	TXD2SQ-12V-Z	TXD2S□-L-12V-Z
	24V DC	TXD2SQ-24V-Z	TXD2S□-L-24V-Z

: For each surface-mount terminal identification, input the following letter. SA type: A, SS type: S

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs. Notes: 1. Tape and reel packing symbol "-Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/3/4/5-pin side) is also available. 2. Please add "-1" to the part number for AgPd contacts (low level load). (Ex. TXD2SA-1.5V-1-Z)

2. M.B.B type/Surge breakdown voltage (between contact and coil) 2,500 V/ Breakdown voltage (between open contacts) 1,000 V

1) Standard PC board terminal

Contact arrangement	Neminal apil valtage	Single side stable
Contact arrangement	Nominal coil voltage	Part No.
	1.5V DC	TXD2-2M-1.5V
	3V DC	TXD2-2M-3V
	4.5V DC	TXD2-2M-4.5V
0 5 0	5V DC	TXD2-2M-5V
2 Form C	6V DC	TXD2-2M-6V
	9V DC	TXD2-2M-9V
	12V DC	TXD2-2M-12V
	24V DC	TXD2-2M-24V

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

2) Surface-mount terminal

(1) Tube packing

Contact arrangement	Neminal coll values	Single side stable
Contact arrangement	Nominal coil voltage	Part No.
	1.5V DC	TXD2S□-2M-1.5V
	3V DC	TXD2S⊒-2M-3V
	4.5V DC	TXD2S□-2M-4.5V
2 Form C	5V DC	TXD2S⊒-2M-5V
2 Form C	6V DC	TXD2SQ-2M-6V
	9V DC	TXD2S□-2M-9V
	12V DC	TXD2S□-2M-12V
	24V DC	TXD2SQ-2M-24V

: For each surface-mount terminal identification, input the following letter. SA type: <u>A</u>, SS type: <u>S</u> Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

(2) Tape and reel packing

Contact arrangement	Naminal apil valtage	Single side stable	
Contact arrangement	Nominal coil voltage	Part No.	
	1.5V DC	TXD2SQ-2M-1.5V-Z	
	3V DC	TXD2SQ-2M-3V-Z	
	4.5V DC	TXD2SQ-2M-4.5V-Z	
2 Form C	5V DC	TXD2SQ-2M-5V-Z	
2 FOILING	6V DC	TXD2SQ-2M-6V-Z	
	9V DC	TXD2SQ-2M-9V-Z	
	12V DC	TXD2SQ-2M-12V-Z	
	24V DC	TXD2SQ-2M-24V-Z	

: For each surface-mount terminal identification, input the following letter. SA type: A, SS type: S

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs.

Notes: 1. Types designed to withstand strong vibration caused, for example, by the use of terminal cutters, can also be ordered.

However, please contact us if you need parts for use in low level load. (Ex. TXD2SA-2M-1.5V-1-Z) 2. Tape and reel packing symbol "-Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/3/4/5-pin side) is also available.

3. () Standard (B.B.M.) type/Surge breakdown voltage (between contact and coil) 6,000 V/ Breakdown voltage (between open contacts) 1,000 V

1) Standard	PC	board	terminal
-------------	----	-------	----------

Contact	Nominal coil	Single side stable	1 coil latching
arrangement	voltage	Part No.	Part No.
	1.5V DC	TXD2-1.5V-6	TXD2-L-1.5V-6
	3V DC	TXD2-3V-6	TXD2-L-3V-6
	4.5V DC	TXD2-4.5V-6	TXD2-L-4.5V-6
2 Form C	5V DC	TXD2-5V-6	TXD2-L-5V-6
2 FOILING	6V DC	TXD2-6V-6	TXD2-L-6V-6
	9V DC	TXD2-9V-6	TXD2-L-9V-6
	12V DC	TXD2-12V-6	TXD2-L-12V-6
	24V DC	TXD2-24V-6	TXD2-L-24V-6

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs. Note: Please add "-7" to the end of the part number for AgPd contacts (low level load).

2) Surface-mount terminal

(1) Tube packing

Contact	Nominal coil	Single side stable	1 coil latching
arrangement	voltage	Part No.	Part No.
	1.5V DC	TXD2S □- 1.5V-6	TXD2S□-L-1.5V-6
	3V DC	TXD2S □ -3V-6	TXD2S□-L-3V-6
4.5V DC 5V DC	4.5V DC	TXD2S □ -4.5V-6	TXD2S□-L-4.5V-6
	5V DC	TXD2S □- 5V-6	TXD2S□-L-5V-6
2 Form C	6V DC	TXD2S □ -6V-6	TXD2S□-L-6V-6
	9V DC	TXD2S □ -9V-6	TXD2S□-L-9V-6
	12V DC	TXD2SQ-12V-6	TXD2S□-L-12V-6
	24V DC	TXD2S □- 24V-6	TXD2SD-L-24V-6

☐: For each surface-mount terminal identification, input the following letter. SA type: <u>A</u>, SS type: <u>S</u> Standard packing: Tube: 40 pcs.; Case: 1,000 pcs. Note: Please add "-7" to the end of the part number for AgPd contacts (low level load).

(2) Tape and reel packing

Contact	Nominal coil	Single side stable	1 coil latching
arrangement	voltage	Part No.	Part No.
	1.5V DC	TXD2SQ-1.5V-6-Z	TXD2SQ-L-1.5V-6-Z
	3V DC	TXD2SQ-3V-6-Z	TXD2SQ-L-3V-6-Z
	4.5V DC	TXD2SQ-4.5V-6-Z	TXD2SQ-L-4.5V-6-Z
2 Form C	5V DC	TXD2SQ-5V-6-Z	TXD2SQ-L-5V-6-Z
2 Form C	6V DC	TXD2SQ-6V-6-Z	TXD2SQ-L-6V-6-Z
	9V DC	TXD2SQ-9V-6-Z	TXD2SQ-L-9V-6-Z
	12V DC	TXD2SQ-12V-6-Z	TXD2SQ-L-12V-6-Z
	24V DC	TXD2SQ-24V-6-Z	TXD2S□-L-24V-6-Z

□: For each surface-mount terminal identification, input the following letter. SA type: <u>A</u>, SS type: <u>S</u>

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs. Notes: 1. Tape and reel packing symbol "-Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/3/4/5-pin side) is also available. 2. Please add "-7" to the part number for AgPd contacts (low level load). (Ex. TXD2SA-1.5V-7-Z)

4. () Standard (B.B.M.) type/Surge breakdown voltage (between contact and coil) 6,000 V/ Breakdown voltage (between open contacts) 1,500 V (High breakdown voltage type) 1) Standard PC board terminal

Contact	Nominal coil	Single side stable	1 coil latching	
arrangement	voltage	Part No.	Part No.	
	1.5V DC	TXD2-1.5V-3	TXD2-L-1.5V-3	
	3V DC	TXD2-3V-3	TXD2-L-3V-3	
	4.5V DC	TXD2-4.5V-3	TXD2-L-4.5V-3	
2 Form C	5V DC	TXD2-5V-3	TXD2-L-5V-3	
2 Form C	6V DC	TXD2-6V-3	TXD2-L-6V-3	
	9V DC	TXD2-9V-3	TXD2-L-9V-3	
	12V DC	TXD2-12V-3	TXD2-L-12V-3	
	24V DC	TXD2-24V-3	TXD2-L-24V-3	

Standard packing: Tube: 40 pcs.; Case: 800 pcs. Note: Please add "-4" to the end of the part number for AgPd contacts (low level load).

2) Surface-m (1) Tube pac	ount terminal king			
Contact	Nominal coil	Single side stable	1 coil latching	
arrangement	voltage	Part No.	Part No.	
	1.5V DC	TXD2SQ-1.5V-3	TXD2SQ-L-1.5V-3	
	3V DC	TXD2SQ-3V-3	TXD2S□-L-3V-3	
	4.5V DC	TXD2SQ-4.5V-3	TXD2SQ-L-4.5V-3	
2 Form C	5V DC	TXD2SQ-5V-3	TXD2SQ-L-5V-3	
2 Form C	6V DC	TXD2SQ-6V-3	TXD2SQ-L-6V-3	
	9V DC	TXD2SQ-9V-3	TXD2SQ-L-9V-3	
	12V DC	TXD2SQ-12V-3	TXD2SQ-L-12V-3	
	24V DC	TXD2SQ-24V-3	TXD2SQ-L-24V-3	

☐: For each surface-mount terminal identification, input the following letter. SA type: <u>A</u>, SS type: <u>S</u> Standard packing: Tube: 40 pcs.; Case: 800 pcs. Note: Please add "-4" to the end of the part number for AgPd contacts (low level load).

(2) Tape and reel packing

Contact	Nominal coil	Single side stable	1 coil latching	
arrangement	voltage	Part No.	Part No.	
	1.5V DC	TXD2SA-1.5V-3-Z	TXD2SA-L-1.5V-3-Z	
	3V DC	TXD2SA-3V-3-Z	TXD2SA-L-3V-3-Z	
	4.5V DC TXD2SA-4.5V-3-Z		TXD2SA-L-4.5V-3-Z	
2 Form C	5V DC	TXD2SA-5V-3-Z	TXD2SA-L-5V-3-Z	
2 FOIM C	6V DC	TXD2SA-6V-3-Z	TXD2SA-L-6V-3-Z	
	9V DC	TXD2SA-9V-3-Z	TXD2SA-L-9V-3-Z	
	12V DC	TXD2SA-12V-3-Z	TXD2SA-L-12V-3-Z	
	24V DC	TXD2SA-24V-3-Z	TXD2SA-L-24V-3-Z	

*Only for SA type.

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs. Notes: 1. Tape and reel packing symbol "-Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/3/4/5-pin side) is also available. 2. Please add "-4" to the part number for AgPd contacts (low level load). (Ex. TXD2SA-1.5V-4-Z)

RATING 1. Coil data

[Standard (B.B.M.) type]

1) Single side stable

			Nominal operating current [±10%] (at 20°C 68°F)			sistance 20°C 68°F)	Nominal operating power		
Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Surge breakdown voltage: 2,500V/ () 6,000 V	Surge breakdown voltage: 6,000 V (High breakdown voltage)	Surge breakdown voltage: 2,500V/ (1) 6,000 V	Surge breakdown voltage: 6,000 V (High breakdown voltage)	Surge breakdown voltage: 2,500V/ (1) 6,000 V	Surge breakdown voltage: 6,000 V (High breakdown voltage)	Max. applied voltage (at 20°C 68°F)
1.5V DC			132.7mA	187.5mA	11Ω	8Ω	-		
3V DC			66.7mA	93.5mA	45Ω	32Ω			
4.5V DC	75%V or less	10%V or more	44.4mA	62.5mA	101Ω	72Ω			
5V DC	of nominal	of nominal	40.0mA	56.2mA	125Ω	89Ω	200mW	280mW	120%V of
6V DC	voltage* (Initial)	voltage*	33.3mA	46.5mA	180Ω	129Ω			nominal voltage
9V DC		(Initial) 22.2mA 16.7mA	31.1mA	405Ω	289Ω		Vollage		
12V DC			23.3mA	720Ω	514Ω				
24V DC			9.6mA	12.9mA	2,504Ω	1,858Ω	230mW	310mW	1

2) 1 coil latching

			Nominal operating current [±10%] (at 20°C 68°F)			sistance t 20°C 68°F) Nominal (erating power	
Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Surge breakdown voltage: 2,500V/ () 6,000 V	Surge breakdown voltage: 6,000 V (High breakdown voltage)	Surge breakdown voltage: 2,500V/ () 6,000 V	() Surge breakdown voltage: 6,000 V (High breakdown voltage)	Surge breakdown voltage: 2,500V/ (1) 6,000 V	Surge breakdown voltage: 6,000 V (High breakdown voltage)	Max. applied voltage (at 20°C 68°F)
1.5V DC			100.0mA	153.1mA	15Ω	10Ω	150mW 230	230mW	120%V of
3V DC	-		50.0mA	76.9mA	60Ω	39Ω			
4.5V DC	75%V or less	75%V or less	33.3mA	51.1mA	135Ω	88Ω			
5V DC	of nominal	of nominal	30.0mA	46.3mA	166Ω	109Ω			
6V DC	voltage*	voltage*	25.0mA	38.5mA	240Ω	156Ω			nominal voltage
9V DC	(Initial)		16.7mA	25.6mA	540Ω	352Ω			
12V DC			12.5mA	19.2mA	960Ω	626Ω			
24V DC			7.1mA	10.4mA	3,388Ω	2,304Ω	170mW	250mW]

[M.B.B. type]

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)	
1.5V DC			166.7mA	9Ω			
3V DC				36Ω			
4.5V DC	75%V or less of nominal voltage* (Initial)		55.6mA	81Ω	250mW	120%V of	
5V DC			50.0mA	100Ω			
6V DC			age* nominal voltage* (Initial)	41.7mA	144Ω	1	nominal voltage
9V DC			27.8mA	324Ω			
12V DC			20.8mA	576Ω			
24V DC			11.3mA	2,133Ω	270mW		

*Pulse drive (JIS C 5442-1986) *Only for surge breakdown voltage of 2,500 V.

Several part numbers will be discontinued September 30, 2013. ļ


Characteristics		Item	Specifi	cations			
	Arrangement		2 Form C	2 Form D (M.B.B.type)*1			
Contact	Contact resistance (Initial)		Max. 100 mΩ (By voltage drop 6 V DC 1A)				
contact	Contact material		Standard contact: Ag+Au clad, AgPd contact (low level load): AgPd+Au clad (stationary), AgPd (movable)				
	Nominal switching capacity		Standard contact: 2 A 30 V DC, AgPd contact: 1 A 30 V DC (resistive load)	1 A 30 V DC (resistive load)			
	Max. switching pow	ver	Standard contact: 60 W (DC), AgPd contact: 30 W (DC) (resistive load)	30 W (DC) (resistive load)			
	Max. switching voltage		220 V DC	110 V DC			
	Max. switching current		Standard contact: 2 A, AgPd contact: 1 A	1 A			
	Min. switching capa	acity (Reference value)*2	10µA10mV DC				
Rating	Nominal operating	Single side stable	Surge breakdown voltage 2,500 V and () 6,000 V types: 200mW (1.5 to 12 V DC), 230mW (24 V DC) Surge breakdown voltage () 6,000 V (High breakdown voltage) type: 280mW (1.5 to 12 V DC), 310mW (24 V DC)	250mW (1.5 to 12 V DC), 270mW (24 V DC)			
	power	1 coil latching	Surge breakdown voltage 2,500 V and () 6,000 V types: 150mW (1.5 to 12 V DC), 170mW (24 V DC) Surge breakdown voltage () 6,000 V (High breakdown voltage) type: 230mW (1.5 to 12 V DC), 250mW (24 V DC)	_			
	Insulation resistance	e (Initial)	Min. 1,000M Ω (at 500V DC) Measurement at same	ne location as "Initial breakdown voltage" sectior			
	Breakdown voltage (Initial)	Between open contacts	Surge breakdown voltage 2,500 V and ① 6,000 V types: 1,000 Vrms for 1min. (Detection current: 10mA) Surge breakdown voltage ① 6,000 V (High breakdown voltage) type: 1,500 Vrms for 1min. (Detection current: 10mA)	500 Vrms for 1min. (Detection current: 10mA			
		Between contact and coil	Surge breakdown voltage 2,500 V type: 2,000 Vrms for 1min. (Detection current: 10mA) Surge breakdown voltage () 6,000 V and () 6,000 V (High breakdown voltage) types: 3,000 Vrms for 1min. (Detection current: 10mA)	2,000 Vrms for 1min. (Detection current: 10m/			
Electrical		Between contact sets	1,000 Vrms for 1min. (Detection current: 10mA)				
haracteristics		Between open contacts	1,500 V (10×160µs) (FCC Part 68)	_			
	Surge breakdown voltage (Initial)	Between contacts and coil*1	Surge breakdown voltage 2,500 V type: 2,500 V, 2 × 10µs (Telcordia) Surge breakdown voltage 6,000 V and 6,000 V (High breakdown voltage) types: 6,000 V, 1.2 × 50µs	2,500 V, 2 × 10μs (Telcordia)			
	Temperature rise (at 20°C 68°F)		Max. 50°C 122°F (By resistive method, nominal coil voltage applied to the coil; contact carrying current: 2A [1A: M.B.B.].)				
	Operate time [Set t	ime] (at 20°C 68°F)	Max. 4 ms [Max. 4 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.)				
		et time] (at 20°C 68°F)	Max. 4 ms [Max. 4 ms] (Nominal coil voltage applied to the coil, excluding contact bou (without diode)				
Nechanical	Shock resistance	Functional	Min. 750 m/s² (Half-wave pulse of sine wave: 6 ms; detection time: 10μs.)	Min. 500 m/s² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)			
characteristics		Destructive	Min. 1,000 m/s ² {100G} (Half-w	vave pulse of sine wave: 6 ms.)			
	Vibration	Functional	10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10µs.)				
	resistance Destructive		10 to 55 Hz at doubl	e amplitude of 5 mm			
	Mechanical		Min. 10 ⁸ (at 180 cpm)	Min. 10 ⁷ (at 180 cpm)			
xpected life	Electrical		Min. 10 ⁵ (2 A 30 V DC resistive), Min. 5×10 ⁵ (1 A 30 V DC resistive) (at 20 cpm) Min. 10 ⁵ (1 A 30 V DC resistive) (at 20 cpm)				
-	Conditions for oper	ation, transport and	Ambient temperature: -40°C to +85°C -40°F to +185°F; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)				
Conditions	storage*3	· •	Humidity: 5 to 85% R.H. (Not freezing	g and condensing at low temperature)			

*1 M.B.B. type models are only available in 2,500 V surge breakdown voltage type.
*2 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load. (AgPd contact type is available for low level load switching.)

*3The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Refer to "6. Usage, Storage and Transport Conditions" in AMBIENT ENVIRONMENT section in Relay Technical Information.


REFERENCE DATA

1. Maximum switching capacity




4. Electrical life (2 A 30 V DC resistive load) Tested sample: TXD2-5V, 6 pcs. Operating speed: 20 cpm


Change of pick-up and drop-out voltage




5-(2). Coil temperature rise Tested sample: TXD2-24V, 6 pcs. Measured portion: Inside the coil Ambient temperature: 25°C 77°F, 70°C 158°F




7. Ambient temperature characteristics Tested sample: TXD2-5V, 5 pcs.




2. Life curve









6-(1). Operate/release time characteristics (with diode) Tested sample: TXD2-5V, 10 pcs.







Tested sample: TXD2-12V, 2 pcs.




3. Mechanical life Tested sample: TXD2-5V, 10 pcs. Operating speed: 180 cpm




5-(1). Coil temperature rise Tested sample: TXD2-5V, 6 pcs. Measured portion: Inside the coil Ambient temperature: 25°C 77°F, 70°C 158°F





6-(2). Operate/release time characteristics (without diode) Tested sample: TXD2-5V, 10 pcs.






9. High-frequency characteristics (Insertion loss)






() Several part numbers will be discontinued September 30, 2013.


10. Malfunctional shock (single side stable) Tested sample: TXD2-5V, 6 pcs




11-(1). Influence of adjacent mounting Tested sample: TXD2-12V, 6 pcs.




11-(2). Influence of adjacent mounting Tested sample: TXD2-12V, 6 pcs.




12. Actual load test (35 mA 48 V DC wire spring relay load) Tested sample: TXD2-5V, 6 pcs.




Change of pick-up and drop-out voltage




Change of contact resistance





13-(1). Distribution of M.B.B. time Tested sample: TXD2-2M-5V, 50 pcs. Terminal No. 3-4-5: ON




13-(2). Distribution of M.B.B. time Tested sample: TXD2-2M-5V, 50 pcs. Terminal No. 8-9-10: ON








Terminal No. 8-9-10: OFF



14. () Surge breakdown voltage test Tested sample: TXD2-3V-6, 30 pcs.



DIMENSIONS (mm inch)


Download CAD Data from our Web site.

Schematic (Bottom view)

1. Surge breakdown voltage 2,500 V and () 6,000 V types

1) Standard PC board terminal





PC board pattern (Bottom view)



Tolerance: $\pm 0.1 \pm .004$

(Deenergized condition)

Single side stable



1 coil latching


(Reset condition)





(!) 6,000 V type

2) Surface-mount terminal

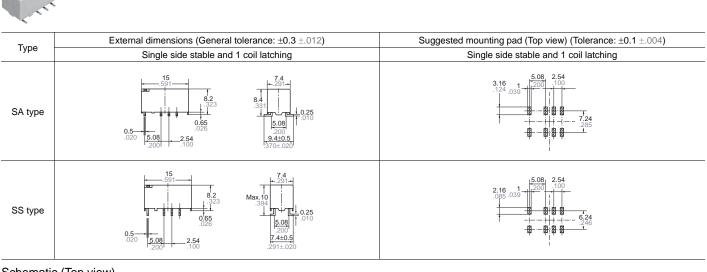

Schematic (Top view) Single side stable



(Deenergized condition)




Direction indication (Reset condition)

ds_61022_en_txd: 150113D

2. () Surge breakdown voltage 6,000 V (High breakdown voltage type)


1) Standard PC board terminal

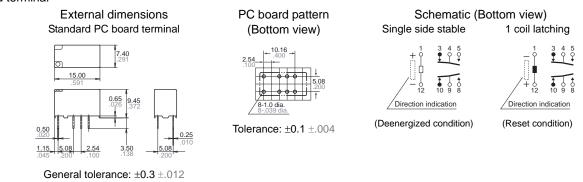

2) Surface-mount terminal CAD Data



CAD Data

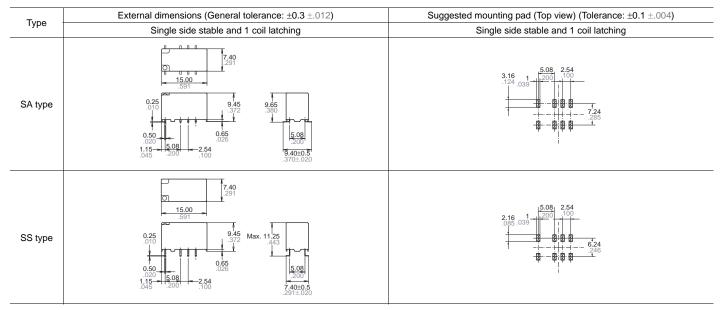

Schematic (Top view) Single side stable





1 coil latching

(Deenergized condition)

tion indication

/ Dire


(Reset condition)

NOTES

1. Packing style

1) Tube packing


The relay is packed in a tube with the relay orientation mark on the left side, as shown in the figure below.




2) Tape and reel packing (surface-mount terminal type)

- (1) Tape dimensions
- (i) SA type


mm inch



(ii) SS type




(2) Dimensions of plastic reel



3) Ambient temperature when transporting and during storage with the product in its original packaging: -40 to $+70^{\circ}C -40$ to $+158^{\circ}F$

2. Automatic insertion

To maintain the internal function of the relay, the chucking pressure should not exceed the values below.




Chucking pressure in the direction A: 4.9 N {500gf} or less Chucking pressure in the direction B: 9.8 N {1 kgf} or less Chucking pressure in the direction C: 9.8 N {1 kgf} or less Please chuck the portion. Avoid chucking the center of the relay. In addition, excessive chucking pressure to the pinpoint of the relay should be avoided.

3. M.B.B. type

A small OFF time may be generated by the contact bounce during contact switching. Check the actual circuit carefully.

If the relay is dropped accidentally, check the appearance and characteristics including M.B.B. time before use.



For Cautions for Use, see Relay Technical Information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

TXD2-2M-12V-1 TXD2SA-1.5V-W TXD2SA-24V-Y TXD2SA-2M-1.5V-W TXD2SA-L-6V-Y TXD2SA-L-9V-W TXD2SA-L-9V-Y TXD2SS-L-6V-1-Y TXD2SS-L-6V-W TXD2SS-1.5V-W TXD2SA-L-4.5V-Y TXD2SA-L-5V-W TXD2SA-L-5V-Y TXD2SA-L-6V-1-W TXD2SA-L-6V-1-Y TXD2SA-L-6V-W TXD2SA-L-12V-Y TXD2SA-L-24V-W TXD2SA-L-24V-Y TXD2SA-L-3V-W TXD2SA-L-3V-Y TXD2SA-L-4.5V-W TXD2SA-9V-Y TXD2SA-L-1.5V-1-W TXD2SA-L-1.5V-1-Y TXD2SA-L-1.5V-W TXD2SA-L-1.5V-Y TXD2SA-L-12V-W TXD2SA-4.5V-Y TXD2SA-5V-W TXD2SA-5V-Y TXD2SA-6V-W TXD2SS-L-9V-W TXD2SS-L-9V-Y TXD2SA-2M-6V-Y TXD2SA-2M-9V-W TXD2SA-2M-9V-Y TXD2SA-3V-W TXD2SA-3V-Y TXD2SA-4.5V-W TXD2SS-L-6V-1-W TXD2SA-2M-4.5V-W TXD2SA-2M-4.5V-Y TXD2SA-2M-5V-W TXD2SA-2M-5V-Y TXD2SA-2M-6V-W TXD2SS-L-3V-W TXD2SS-L-3V-Y TXD2SS-L 4.5V-W TXD2SS-L-4.5V-Y TXD2SS-L-5V-W TXD2SS-L-5V-Y TXD2SS-L-1.5V-W TXD2SS-L-1.5V-Y TXD2SS-L-12V-W TXD2SS-L-12V-Y TXD2SS-L-24V-W TXD2SS-L-24V-Y TXD2SS-6V-W TXD2SS-6V-Y TXD2SS-9V-W TXD2SS-9V-Y TXD2SS-L-1.5V-1-W TXD2SS-L-1.5V-1-Y TXD2SA-12V-1-W TXD2SA-12V-W TXD2SA-12V-Y TXD2SA-24V-W TXD2SS-5V-W TXD2SS-5V-Y TXD2SS-2M-9V-W TXD2SS-2M-9V-Y TXD2SS-3V-W TXD2SS-3V-Y TXD2SS-4.5V-W TXD2SA-1.5V-Y TXD2SS-2M-4.5V-W TXD2SS-2M-4.5V-Y TXD2SS-2M-5V-W TXD2SS-2M-5V-Y TXD2SS-2M-6V-W TXD2SS-2M-6V-Y TXD2SS-L-6V-Y TXD2SS-2M-12V-Y TXD2SS-2M-24V-W TXD2SS-2M-24V-Y TXD2SS-2M-3V-W TXD2SS-2M-3V-Y TXD2SS-24V-W TXD2SS-24V-Y TXD2SS-2M-1.5V-W TXD2SS-2M-1.5V-Y TXD2SS-2M-12V-W TXD2SS-4.5V-Y TXD2SA-2M-3V-Y TXD2SA-6V-Y TXD2SA-9V-W TXD2SS-1.5V-Y TXD2SS-12V-W TXD2SS-12V-Y