

Surface Mount Diplexer

RDP-50-2R15+

50Ω DC to 2150 MHz
(DC-50, 950-2150 MHz)

The Big Deal

- Low insertion loss
- High stopband insertion loss
- Miniature shielded package



CASE STYLE: CK605

Product Overview

RDP-50-2R15+ is a low-pass + high-pass combination device. Low pass port is designed for DC to 50 MHz and high pass port is designed for 950 to 2150 MHz. This diplexer can be used to pass, IF, pilot carrier or clock synchronizing signal, SATCOM modems, air-traffic control and other multiband radio systems.

Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
Extended stopband rejection	Spurious rejection and avoids using additional filters.
Shielded case.	Reduced interference with the surrounding components.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Diplexer

50Ω DC to 2150 MHz (DC-50, 950-2150 MHz)

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power Input 1W at 25°C

Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation

Pin Connections


HIGH PASS PORT 10

LOW PASS PORT 14

COMMON PORT 2

GROUND 1,3,9,11-13,15,16


Outline Drawing

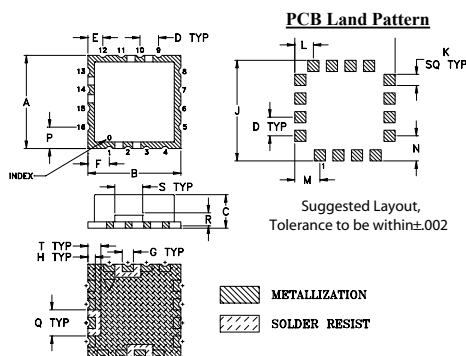

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060
12.7	12.7	4.572	2.54	2.032	2.921	1.524	1.016	13.72	1.524
L	M	N	P	Q	R	S	T	Wt.	
.100	.135	.135	.115	.140	.070	.150	.070	grams	
2.54	3.429	3.429	2.921	3.556	1.778	3.81	1.778	1.0	

Demo Board MCL P/N: TB-10+ Suggested PCB Layout (PL-012)

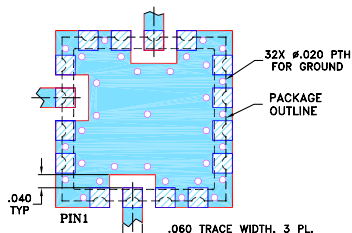

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Low insertion loss
- 50Ω Impedance
- Combination of Low pass and High pass filters
- Miniature shielded package
- Aqueous washable

Applications

- SATCOM modem
- Air-traffic control

RDP-50-2R15+



CASE STYLE: CK605

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications at 25°C






Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	Low Pass	DC-50	-	0.5	1.0
		High Pass	950-2150	-	0.3	1.0
	Flatness	High pass	950-2150	-	± 0.1	-
		Low Pass	DC-50	15	22	-
	Return Loss	High Pass	950-2150	15	22	-
		Common	DC-50	15	22	-
Stop Band Isolation	Low Pass	150-950	25	34	-	dB
	High Pass	50-250	25	32	-	dB

Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)			RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
1	0.17	100.77	36.90	37.13	0.05
6	0.18	103.55	29.95	29.69	0.04
50	0.45	89.18	24.50	22.94	0.03
56	0.53	87.99	20.84	19.89	0.03
72	2.08	83.82	6.49	6.28	0.03
78	3.97	82.25	3.58	3.44	0.04
82	5.68	83.66	2.41	2.30	0.04
112	20.10	69.85	0.42	0.43	0.04
130	27.19	62.78	0.29	0.30	0.05
140	30.64	59.39	0.25	0.27	0.06
150	33.83	56.20	0.23	0.24	0.06
250	57.76	32.77	0.17	0.11	0.16
264	60.68	30.27	0.18	0.10	0.19
326	80.43	20.50	0.27	0.07	0.33
496	66.85	3.06	3.98	0.05	4.19
520	66.66	2.07	5.61	0.04	5.83
685	69.06	0.35	20.41	0.05	20.61
950	66.50	0.21	27.63	0.06	29.44
1500	81.05	0.18	22.60	0.11	26.52
1800	61.62	0.17	24.45	0.12	30.63
2000	55.30	0.17	28.52	0.13	39.82
2150	51.83	0.17	32.48	0.14	33.86

Functional Schematic

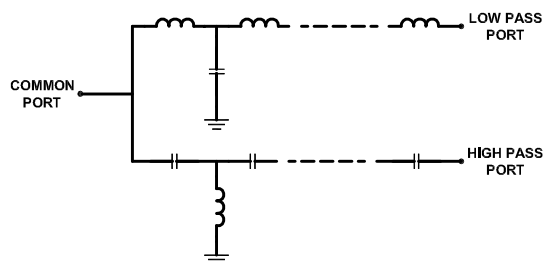

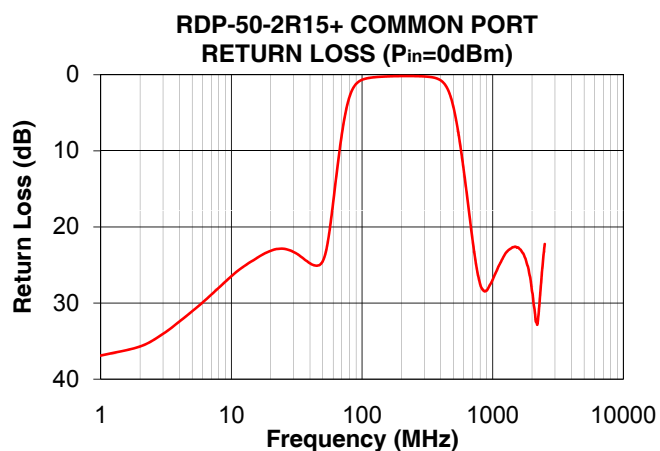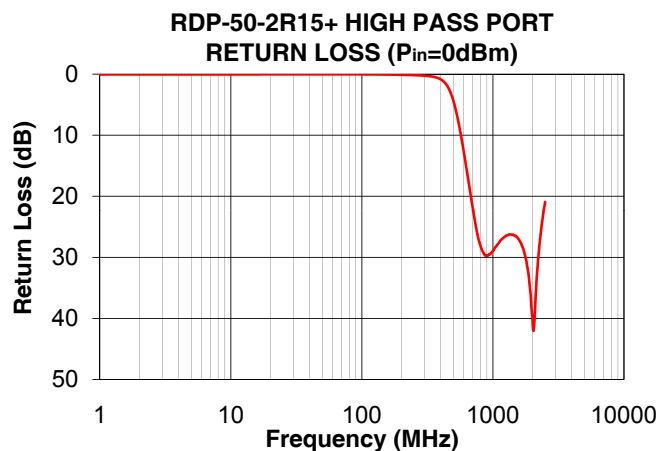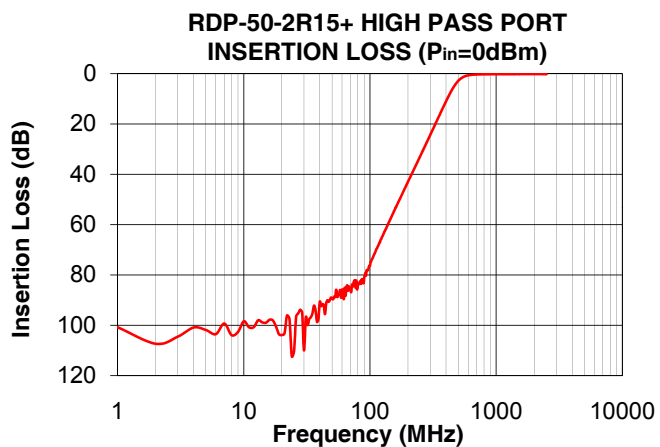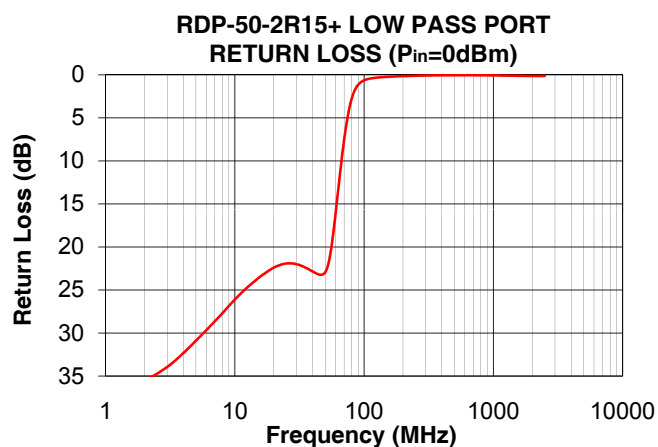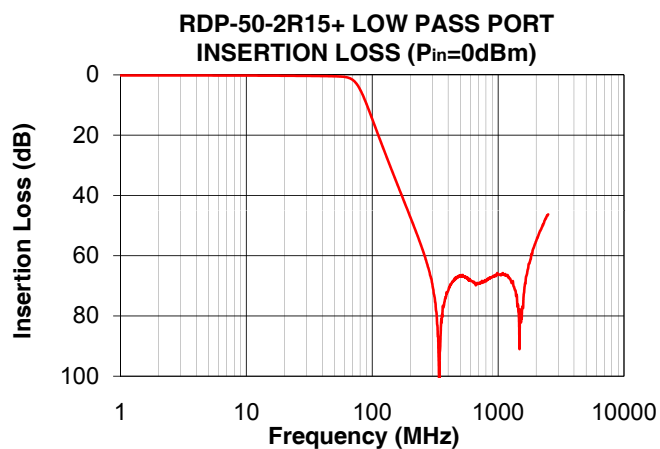

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[RDP-50-2R15+](#)