

Using breakthrough technology,
we aim for products that will create new markets.

New Product News

Expanding the product line-up of low resistance type chip resistor

Thick Film Chip Resistor

0805 Anti-Sulfurated Thick Film Chip Resistor (Low Resistance Type)

Industry/Field: Mobile communications, Car electronics,
Industrial equipment

High performance and anti-corrosion in a sulfurated atmosphere




• Development Target:

Anti-sulfurated resistors are favorable for devices used outside such as cell stations or machine tools used with oil. However, low resistance type (100 mΩ to 1 Ω) had not been available so far. This product is aiming to meet such demand mentioned above.

• Features:

- 1 High anti-corrosion resistor (100 mΩ to 1 Ω)
- 2 Good TCR : $\pm 150 (\times 10^{-6}/^{\circ}\text{C})$
- 3 High rated power : 0.25W (70 °C)

• Construction:

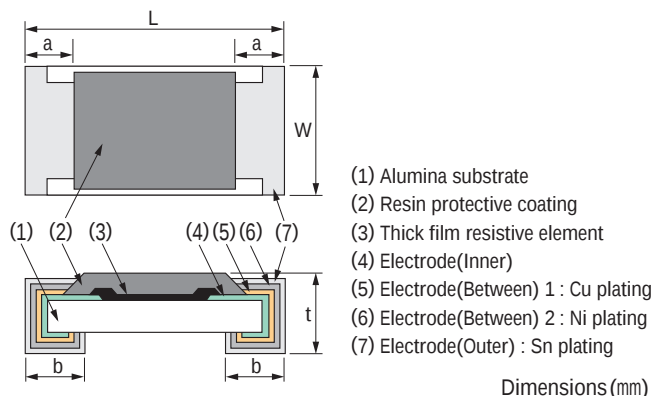

Series	L	W	a	b	t
ERJS6	2.00 ± 0.20	1.25 ± 0.10	0.45 ± 0.20	0.45 ± 0.20	0.55 ± 0.10

• Characteristics/specifications:

Series	ERJS6 Series
Resistance Range	100 mΩ to 1 Ω (E24)
Resistance Tolerance	$\pm 1\%$, $\pm 2\%$, $\pm 5\%$
Power Rating	0.25W
TCR*	$\pm 150 \times 10^{-6}/^{\circ}\text{C}$
Category Temperature Range	-55 °C to +155 °C

*TCR(Temperature Coefficient of Resistance)

• Applications/usage examples:

- Machine tools
- Automotive applications

• Explanation of part numbers:

1	2	3	4	5	6	7	8	9	10	11	
E	R	J	S	6	S	J	R	2	0	V	
Thick Film Chip Resistors			Type: 0805 inch size Power Rating: 0.25W		Resistance Tolerance F: ± 1% G: ± 2% J: ± 5%		Resistance Value (Example) R20 → 0.20Ω = 200 mΩ 1R0 → 1.0Ω = 1000 mΩ				
			Resistance Range/TCR S: 100mΩ to 200mΩ/±150×10 ⁻⁶ /°C 0.220mΩ to 1Ω/±150×10 ⁻⁶ /°C					Packaging Methods Punched Carrier Taping 4 mm pitch, 5000 pcs.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[ERJ-S6QFR22V](#) [ERJ-S6QFR27V](#) [ERJ-S6QFR30V](#) [ERJ-S6QFR33V](#) [ERJ-S6QFR36V](#) [ERJ-S6QFR43V](#) [ERJ-S6QFR51V](#) [ERJ-S6QFR56V](#) [ERJ-S6QFR62V](#) [ERJ-S6QFR68V](#) [ERJ-S6QFR75V](#) [ERJ-S6QFR82V](#) [ERJ-S6QFR91V](#) [ERJ-S6QJ1R0V](#) [ERJ-S6QJR22V](#) [ERJ-S6QJR24V](#) [ERJ-S6QJR27V](#) [ERJ-S6QJR30V](#) [ERJ-S6QJR36V](#) [ERJ-S6QJR39V](#) [ERJ-S6QJR43V](#) [ERJ-S6QJR47V](#) [ERJ-S6QJR51V](#) [ERJ-S6QJR56V](#) [ERJ-S6QJR62V](#) [ERJ-S6QJR68V](#) [ERJ-S6QJR75V](#) [ERJ-S6QJR82V](#) [ERJ-S6QJR91V](#) [ERJ-S6SFR11V](#) [ERJ-S6SFR12V](#) [ERJ-S6SFR16V](#) [ERJ-S6SFR18V](#) [ERJ-S6SJR10V](#) [ERJ-S6SJR12V](#) [ERJ-S6SJR13V](#) [ERJ-S6SJR15V](#) [ERJ-S6SJR18V](#) [ERJ-S6SJR20V](#) [ERJ-S6SJR11V](#) [ERJ-S6QFR24V](#) [ERJ-S6QJR33V](#) [ERJ-S6SFR13V](#) [ERJ-S6SFR15V](#) [ERJ-S6SJR16V](#) [ERJ-S6QFR39V](#) [ERJ-S6QFR47V](#) [ERJ-S6SFR20V](#) [ERJ-S6SFR10V](#) [ERJ-S6QF1R0V](#)