


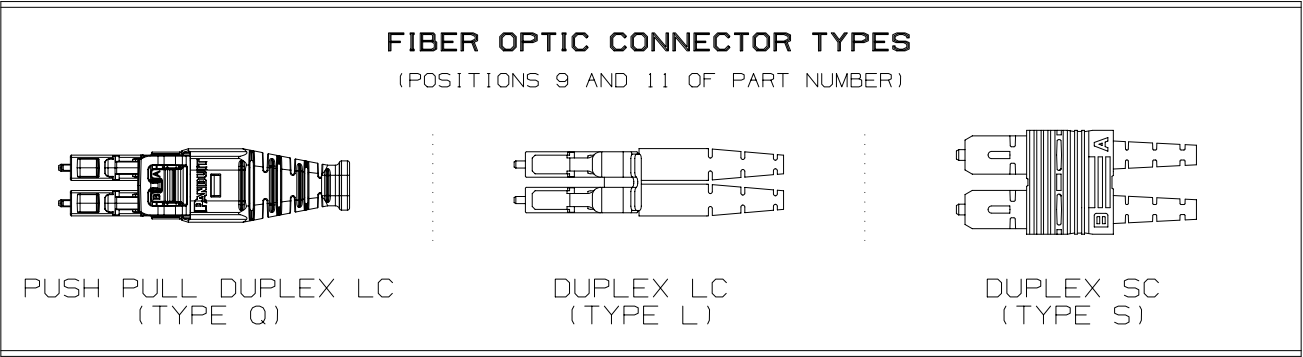

- NOTES:
1. CABLE ASSEMBLY (WITH CONNECTORS):

A. SEE SHEET 2 FOR PART NUMBER MATRIX.

B. CANNOT BE LESS THAN THE LENGTH SPECIFIED IN THE PART NUMBER.

C. THE MAXIMUM CABLE LENGTH IS NOT TO EXCEED 10cm (4") OVER SPECIFIED LENGTH FOR LESS THAN 10 METER; AND +1%/-0% GREATER THAN 10 METERS.

D. TIP TO TIP LENGTH IS MEASURED WITHOUT DUST CAPS INSTALLED.

E. PATCHCORD ROUTING CONFIGURATION IS "A" TO "B".

F. THIS DRAWING SHALL BE APPLICABLE TO ANY LENGTH PATCHCORD AS DESIGNATED BY THE PART NUMBER, WHERE M=METER.

2. TECHNICAL SPECIFICATIONS:

A. OPERATING TEMPERATURE RANGE IS FROM -10 C TO +60 C.

B. CONNECTORS ARE 'FOCIS' COMPLIANT.

C. CABLE ASSEMBLIES COMPLY WITH THE REQUIREMENTS OF T1A/E1A-568-C.3 OR EQUIVALENT IEC STANDARDS.

D. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

3. PACKAGING:

A. CABLE ASSEMBLY SHIPPED WITH DUST CAPS INSTALLED.

B. UNIT QUANTITY: 1 PATCHCORD/PIGTAIL PER BAG.

CONNECTOR INSERTION/RETURN LOSS SPECIFICATIONS						
CONNECTOR TYPE	MAXIMUM INSERTION LOSS (PER CONNECTOR)				MINIMUM RETURN LOSS (PER CONNECTOR)	
	SM (UPC)	STANDARD MM (PC)	OPTIMIZED MM (PC)	ULTRA-LOW (OM4 & OM4+)	SM (UPC)	MM (PC)
DUPLEX LC	0.35dB	0.25dB	0.15dB	0.10dB	55dB	26dB
DUPLEX SC	0.50dB	0.25dB	0.15dB	0.10dB	55dB	26dB
PUSH-PULL LC	0.35dB	0.25dB	0.15dB	0.10dB	55dB	26dB

							TITLE					
							JACKETED DUPLEX FIBER PATCH CORDS					
							CUSTOMER DRAWING					
							ITEM REVISION NAME		PANDUIT			
							M02779DX/00					
							DATASET FILE NAME		MATERIAL:			
							M02779DX_DC/00B					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
01	07-06-16	SAT	RWD	MMN	B. ADDED (T)STD IL PAIR FLIPPED & (P)OPT IL PAIR FLIPPED. A. ADDED (R)RISER AND (L)LSZH TO 5th POSITION.	M02779DX-DC	.x ± .03 [.762] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 1 °					
00	01-06-16	SAT	RWB	RWB	RELEASED TO PRODUCTION	M02779DX-DC	THIRD ANGLE PROJECTION		DRAWING NUMBER:			
							DRAWN BY	DATE	CHK	SCALE	SIZE	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN						
							SAT	01-04-16	RWB	NONE	B	

PANDUIT

DRAWING NUMBER:
M02779DX-DC

SHT 1 OF 2



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT JACKETED FIBER PATCH
CORD MASTER OPTIONS LIST

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
F														

1st POSITION - FIBER PRODUCT

F - FIBER

2nd POSITION - FIBER TYPE

9 - SINGLEMODE
S - SIG-CORE (OM4+)
X - OM3
Z - OM4

3rd POSITION - FIBER COUNT

2 - 2 FIBER

4th POSITION - CABLE TYPE

E - 1.6mm DUPLEX
3 - 3mm DUPLEX (SC-SC ONLY)

5th POSITION - JACKET TYPE

P - PLENUM
R - RISER
L - LSZH

6th POSITIONS - CONNECTOR (END A)

Q - PUSH PULL DUPLEX LC
L - LC DUPLEX
S - SC DUPLEX

7th POSITIONS - CONNECTOR VARIANT

1 - PUSH PULL DUPLEX LC
N - NO VARIANT

8th POSITION - CONNECTOR (END B)

Q - PUSH PULL DUPLEX LC
L - LC DUPLEX
S - SC DUPLEX

9th POSITIONS - CONNECTOR VARIANT

1 - PUSH PULL DUPLEX LC
N - NO VARIANT

10th POSITION - PERFORMANCE/POLARITY

S - STANDARD IL
T - STANDARD IL PAIR FLIPPED
O - OPTIMIZED IL
P - OPTIMIZED IL PAIR FLIPPED
N - ULTRA LOW IL (OM4 & OM4+ ONLY)

11th POSITION - PULLING EYE

N - NO PULLING EYE

12th POSITION - UNIT OF MEASURE

F - FEET
M - METERS

13th, 14th, AND 15th POSITIONS - ASSEMBLY LENGTH

F - 001-050 FEET
M - 001-050 METERS

							TITLE JACKETED DUPLEX FIBER PATCH CORDS CUSTOMER DRAWING					
							ITEM REVISION NAME M02779DX/00				PANDUIT	
							DATASET FILE NAME M02779DX_DC/00B					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .03 [.762] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 1 °				MATERIAL :	
							THIRD ANGLE PROJECTION				DRAWING NUMBER: M02779DX - DC	
01	07-06-16	SAT	RWB	MMN	SEE SHEET 1 FOR REVISION HISTORY.	M02779DX-DC						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY SAT	DATE 01-04-16	CHK RWB	SCALE NONE	SHT 2 OF 2	SIZE B



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

<u>FX2ERLNSNSNM003</u>	<u>FX2ERLNLNSNM002</u>	<u>FX2ERLNLNSNM010</u>	<u>FX2ERLNLNSNM005</u>	<u>FX2ERLNSNSNM002</u>
<u>FX2ERLNLNSNM008</u>	<u>FX2ERLNLNSNM015</u>	<u>FX2ERLNLNSNM007</u>	<u>FX2ERLNSNSNM001</u>	<u>FX2ERLNLNSNM020</u>
<u>FX2ERLNLNSNM025</u>	<u>FX2ERLNSNSNM010</u>	<u>FX2ERLNLNONM010</u>	<u>FX2ERLNLNSNM011</u>	<u>FX2ERLNLNONM002</u>
<u>FX2ERLNSNSNM039</u>	<u>FX2ERLNSNSNM042</u>	<u>FX2ERLNLNONM006</u>	<u>FX2ERLNLNONM005</u>	<u>FX2ERLNSNSNM018</u>
<u>FX2ERLNLNSNM038</u>	<u>FX2ERLNSNSNM019</u>	<u>FX2ERLNLNSNM042</u>	<u>FX2ERLNSNSNM022</u>	<u>FX2ERLNLNSNM022</u>
<u>FX2ERLNSNSNM012</u>	<u>FX2ERLNLNSNM028</u>	<u>FX2ERLNSNSNM029</u>	<u>FX2ERLNLNSNM045</u>	<u>FX2ERLNSNSNM011</u>
<u>FX2ERLNLNONM008</u>	<u>FX2ERLNLNSNM035</u>	<u>FX2ERLNLNSNM013</u>	<u>FX2ERLNLNSNM048</u>	<u>FX2ERLNSNSNM028</u>
<u>FX2ERLNSNSNM048</u>	<u>FX2ERLNSNSNM045</u>	<u>FX2ERLNLNSNM018</u>	<u>FX2ERLNLNSNM029</u>	<u>FX2ERLNLNSNM041</u>
<u>FX2ERLNSNSNM038</u>	<u>FX2ERLNSNSNM049</u>	<u>FX2ERLNLNSNM004</u>	<u>FX2ERLNLNSNM031</u>	<u>FX2ERLNSNSNM013</u>
<u>FX2ERLNLNSNM040</u>	<u>FX2ERLNLNSNM049</u>	<u>FX2ERLNSNSNM008</u>	<u>FX2ERLNLNSNM046</u>	<u>FX2ERLNLNSNM050</u>
<u>FX2ERLNLNSNM043</u>	<u>FX2ERLNSNSNM015</u>	<u>FX2ERLNSNSNM005</u>	<u>FX2ERLNLNSNM017</u>	<u>FX2ERLNSNSNM025</u>
<u>FX2ERLNSNSNM004</u>	<u>FX2ERLNSNSNM035</u>	<u>FX2ERLNSNSNM009</u>	<u>FX2ERLNSNSNM036</u>	<u>FX2ERLNLNONM009</u>
<u>FX2ERLNSNSNM026</u>	<u>FX2ERLNLNSNM026</u>	<u>FX2ERLNSNSNM032</u>	<u>FX2ERLNSNSNM041</u>	<u>FX2ERLNSNSNM021</u>
<u>FX2ERLNLNSNM021</u>	<u>FX2ERLNSNSNM023</u>	<u>FX2ERLNLNSNM039</u>	<u>FX2ERLNSNSNM031</u>	<u>FX2ERLNSNSNM006</u>
<u>FX2ERLNSNSNM043</u>	<u>FX2ERLNLNSNM044</u>	<u>FX2ERLNSNSNM044</u>	<u>FX2ERLNSNSNM037</u>	<u>FX2ERLNLNSNM036</u>
<u>FX2ERLNLNSNM014</u>	<u>FX2ERLNLNSNM032</u>	<u>FX2ERLNSNSNM014</u>	<u>FX2ERLNSNSNM016</u>	<u>FX2ERLNLNSNM033</u>
<u>FX2ERLNLNONM003</u>	<u>FX2ERLNLNSNM037</u>	<u>FX2ERLNSNSNM017</u>	<u>FX2ERLNLNSNM047</u>	<u>FX2ERLNLNSNM016</u>
<u>FX2ERLNLNSNM024</u>	<u>FX2ERLNLNSNM009</u>	<u>FX2ERLNLNONM004</u>	<u>FX2ERLNSNSNM024</u>	<u>FX2ERLNLNSNM012</u>
<u>FX2ERLNLNONM007</u>	<u>FX2ERLNLNSNM006</u>	<u>FX2ERLNSNSNM047</u>	<u>FX2ERLNSNSNM027</u>	<u>FX2ERLNSNSNM034</u>
<u>FX2ERLNLNSNM034</u>	<u>FX2ERLNSNSNM020</u>	<u>FX2ERLNSNSNM033</u>	<u>FX2ERLNSNSNM046</u>	<u>FX2ERLNLNONM001</u>