

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector, rear mounting, straight, for standard and SPEEDCON interlock, M17, number of positions: 17, type of contact: Pin, Axial O-ring, 4x Ø 3.2, shielded: yes, flange dimensions: 25.75 mm x 25.75 mm, number of positions: 17, connection method: Crimp connection

The figure shows the 8-pos. product version

### Your advantages

- ✓ Consistent EMC protection for reliable connection solutions in the industrial environment
- ✓ Crimping connection: vibration- and temperature-resistant assembly
- ✓ Flexible mounting, thanks to snap-in contact inserts



### Key Commercial Data

|              |                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 1 pc                                                                                                    |
| GTIN         | <br>4 046356 827508 |
| GTIN         | 4046356827508                                                                                           |

### Technical data

#### General

|                                                    |                                                             |
|----------------------------------------------------|-------------------------------------------------------------|
| Note                                               | Order information: Order crimp contacts Ø 0.6 mm separately |
| Type of locking                                    | for standard and SPEEDCON interlock                         |
| Direction of rotation of contact chamber numbering | Standard                                                    |
| Coding                                             | N                                                           |
| Contact connection method                          | Crimp connection                                            |
| Type of contacts                                   | Pin                                                         |
| Number of positions                                | 17                                                          |
| Contact diameter of power contacts                 | 0.6 mm                                                      |
| Rated current for power contacts                   | 3.6 A                                                       |
| Pg housing screw connection                        | none                                                        |
| Mounting type                                      | 4x Ø 3.2                                                    |

#### Ambient conditions

# Device connector, rear mounting - ST-17P1N8AW500S - 1619225

## Technical data

### Ambient conditions

|                      |                   |
|----------------------|-------------------|
| Ambient temperature  | -40 °C ... 125 °C |
| Degree of protection | IP67              |

### Specifications according to DIN EN 61984:2001

|                                               |        |
|-----------------------------------------------|--------|
| Installation height max.                      | 3000 m |
| Nominal / operating voltage of power contacts | 60 V   |
| Rated surge voltage of power contacts         | 1.5 kV |
| Overvoltage category of power contacts        | II     |
| Degree of pollution of power contacts         | 3      |

### Standards and Regulations

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.                                                                                                                                                                                                                                                                                 |
|             | • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.                                                                                                                                                                                                                    |
|             | • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
|             | • The products are suitable for applications in plant, controller, and electrical device engineering.                                                                                                                                                                                                                                                                                                                              |
|             | • When operating the connectors in outdoor applications, they must be separately protected against environmental influences.                                                                                                                                                                                                                                                                                                       |
|             | • Assembled products may not be manipulated or improperly opened.                                                                                                                                                                                                                                                                                                                                                                  |
|             | • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> ).                                                                                                                                                                                      |
|             | • When using the product in direct connection with third-party manufacturers, the user is responsible.                                                                                                                                                                                                                                                                                                                             |
|             | • For operating voltages > 50 V AC, conductive connector housings must be grounded                                                                                                                                                                                                                                                                                                                                                 |
|             | • Ensure that the protective or functional ground has been properly connected.                                                                                                                                                                                                                                                                                                                                                     |
|             | • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector                                                                                                                                                                                                                                                                                            |
|             | • Only use tools recommended by Phoenix Contact                                                                                                                                                                                                                                                                                                                                                                                    |
|             | • The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.                                                                                                                                                                                                                                   |
|             | • Operate the connector only when it is fully plugged in and interlocked.                                                                                                                                                                                                                                                                                                                                                          |
|             | • Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.                                                                                                                                                                                                                                                                                                |
|             | • Observe the minimum bending radius of the cable. Lay the cable without twisting it.                                                                                                                                                                                                                                                                                                                                              |

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

### Technical data

#### Standards and Regulations


|  |                                                                                                                                                                                                                                                                                        |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <ul style="list-style-type: none"> <li>The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li> </ul> |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| China RoHS | Environmentally Friendly Use Period = 50 years                                                      |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings


Schematic diagram

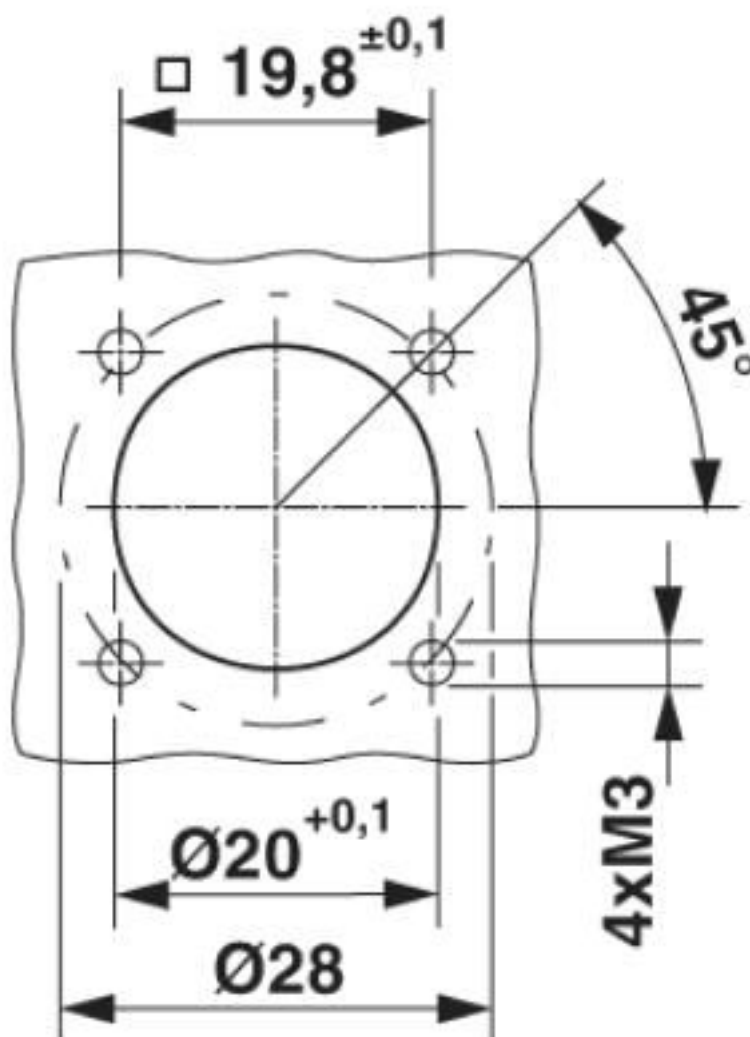

#### Installation dimensions


## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

Diagram

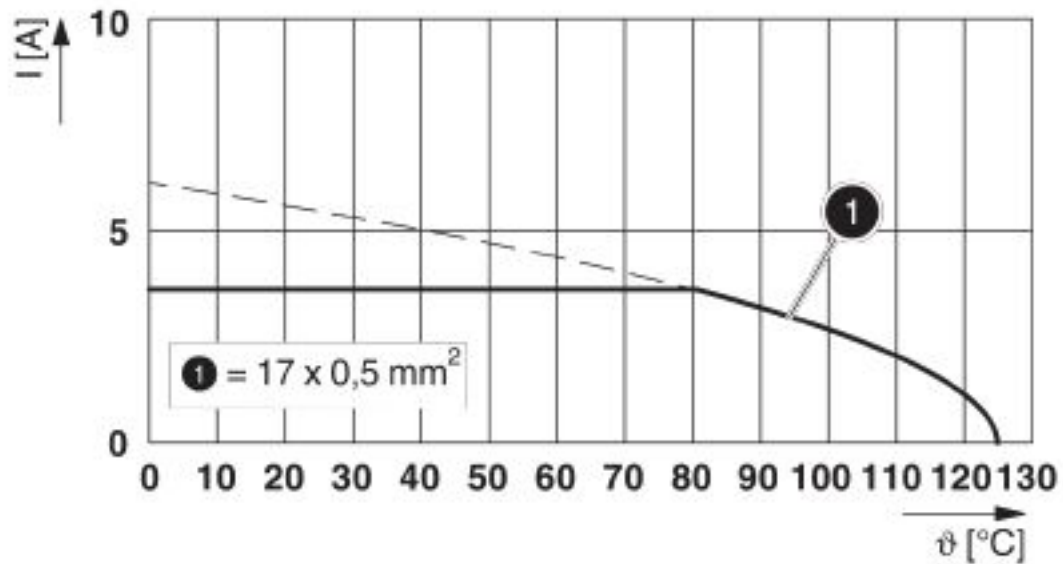


$I$  = current strength,  $\theta$  = ambient temperature, 17x 3.6 A

Dimensional drawing

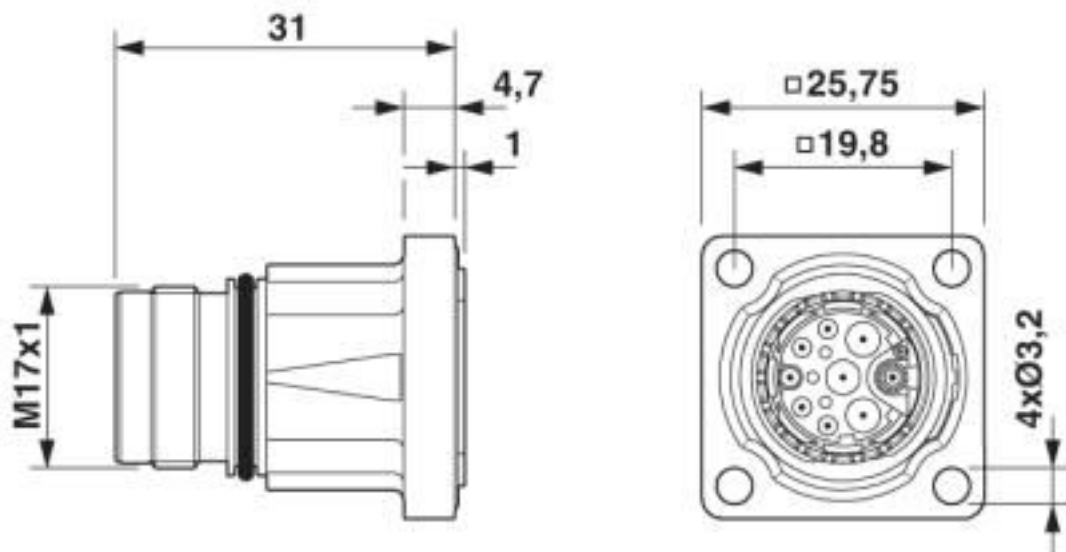

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

Schematic diagram

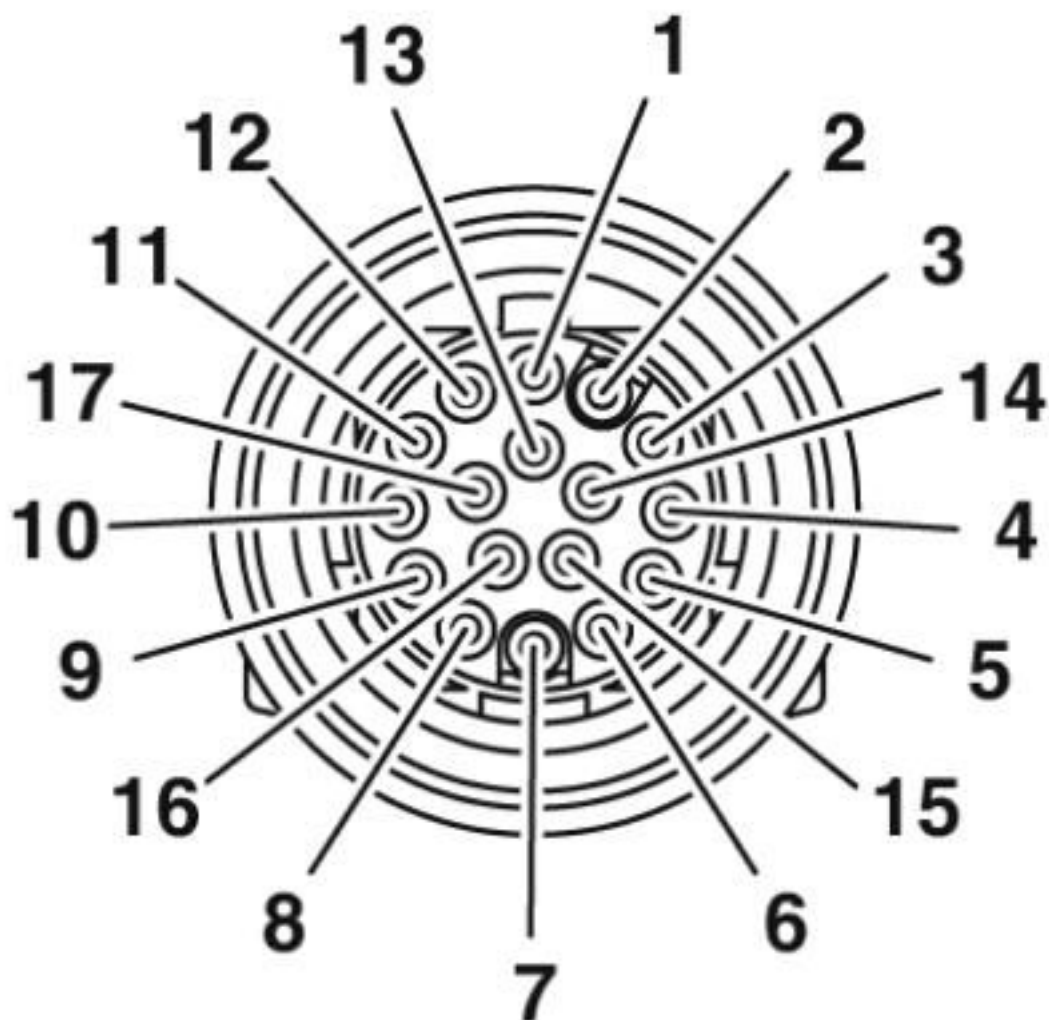

Connector pin assignment

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440102 |
| eCl@ss 4.0    | 27140800 |
| eCl@ss 4.1    | 27140800 |
| eCl@ss 5.0    | 27143400 |
| eCl@ss 5.1    | 27143400 |
| eCl@ss 6.0    | 27279200 |
| eCl@ss 7.0    | 27440103 |
| eCl@ss 8.0    | 27440103 |
| eCl@ss 9.0    | 27440102 |

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002635 |
| ETIM 5.0 | EC002061 |
| ETIM 6.0 | EC002061 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11     | 43172015 |
| UNSPSC 12.01  | 43201404 |
| UNSPSC 13.2   | 39121413 |
| UNSPSC 18.0   | 39121413 |
| UNSPSC 19.0   | 39121413 |
| UNSPSC 20.0   | 39121413 |
| UNSPSC 21.0   | 39121413 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

#### Ex Approvals

#### Approval details

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 335019 |
| Nominal voltage UN | 60 V                                                                                |                                                                                                                                                       |               |
| Nominal current IN | 1 A                                                                                 |                                                                                                                                                       |               |
| mm²/AWG/kcmil      | 26                                                                                  |                                                                                                                                                       |               |

|                    |                                                                                     |                                                                                                                                                       |               |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 335019 |
| Nominal voltage UN | 60 V                                                                                |                                                                                                                                                       |               |

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

### Approvals

|                                |     |
|--------------------------------|-----|
|                                |     |
| Nominal current I <sub>N</sub> | 1 A |
| mm <sup>2</sup> /AWG/kcmil     | 26  |

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01687 |
|-----|-----------------------------------------------------------------------------------|---------|

|                  |                                                                                   |
|------------------|-----------------------------------------------------------------------------------|
| cULus Recognized |  |
|------------------|-----------------------------------------------------------------------------------|

### Accessories

#### Accessories

#### Crimp contact

Crimp contact - ST-06KP010 - 1607577



Crimp contact, turned, contact diameter: 0.6 mm, crimp range: 0.06 mm<sup>2</sup> ... 0.25 mm<sup>2</sup>

Crimp contact - ST-06KP020 - 1607578



Crimp contact, turned, contact diameter: 0.6 mm, crimp range: 0.14 mm<sup>2</sup> ... 0.34 mm<sup>2</sup>

Crimp contact - ST-06KP030 - 1607579



Crimp contact, turned, contact diameter: 0.6 mm, crimp range: 0.34 mm<sup>2</sup> ... 0.5 mm<sup>2</sup>

### Mounting material

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

### Accessories

Color-coding - ST-Z0019 - 1620621



Color-coding, color: green

---

Color-coding - ST-Z0020 - 1620622



Color-coding, color: orange

---

Color-coding - ST-Z0021 - 1620623



Color-coding, color: black

---

Contact removal tool - ST-Z0001 - 1607770



Unlocking tool for contact carriers for snapping in the M17 device connectors

---

### Protective cover

Protective cap - ST-Z0006 - 1607776



Plastic protection cap for connectors with M17 external thread

## Device connector, rear mounting - ST-17P1N8AW500S - 1619225

### Accessories

Metal protective cap - ST-Z0014 - 1616069



Metal protection cap for connectors with M17 external thread

---

Metal protective cap - ST-Z0013 - 1616068



Metal protection cap with steel wire for connectors with M17 external thread

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1619225](#)