

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Flush-type connector, Power, 5-position, Plug, M12, K - Power, Rear mounting, M16 x 1.5, Individual wires, cable length: 1 m, 2.50 mm², PEX litz wire

Your advantages

- $\ensuremath{\,^{\scriptsize \ensuremath{\mathbb{M}}}}$ For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- Mechanical tightening limitation for long-term-stable gasket
- Pre-assembled with litz wires for immediate use
- ☑ Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

RoHS

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	25 pc
GTIN	4 063151 170691
GTIN	4063151170691

Technical data

Dimensions

Fixed cable length	1 m
Ambient conditions	

Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)

General

Standards/regulations	M12 connector IEC 61076-2-111 In line with
Insertion/withdrawal cycles	> 100
Overvoltage category	III



Technical data

General

Coding	K - Power
Thread type	M16 x 1.5
Cable cross section	2.5 mm ²
AWG signal line	14
Rated surge voltage	6 kV
Degree of pollution	3
Degree of protection	IP67
Number of positions	5
Current	16 A
Voltage	630 V

Material

Contact material	CuZn
Contact surface material	Au
Flammability rating according to UL 94	V0

Connection data

Connection method	Individual wires
Cable type	PEX litz wire

Standards and Regulations

Standards/specifications	M12 connector IEC 61076-2-111 In line with
Flame resistance	in acc. with UL FT-2
Halogen-free	according to IEC 60754-1
Other resistance	Hydrolysis-resistant
Flammability rating according to UL 94	V0
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	• The products are suitable for applications in plant, controller, and electrical device engineering.
	When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	Assembled products may not be manipulated or improperly opened.
	• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).

10/28/2020 Page 2 / 6



Technical data

Standards and Regulations

 When using the product in direct connection with third-party manufacturers, the user is responsible.
 For operating voltages > 50 V AC, conductive connector housings must be grounded
• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
 Observe the corresponding technical data. You will find information: On the product On the packing label In the supplied documentation Online at phoenixcontact.com/products under the product
Only use tools recommended by Phoenix Contact
• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
Ensure that the protective or functional ground has been properly connected.
VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Environmental Product Compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings



Schematic diagram

Connector pin assignment of M12 plug, 5-pos., K-coded, pin side view



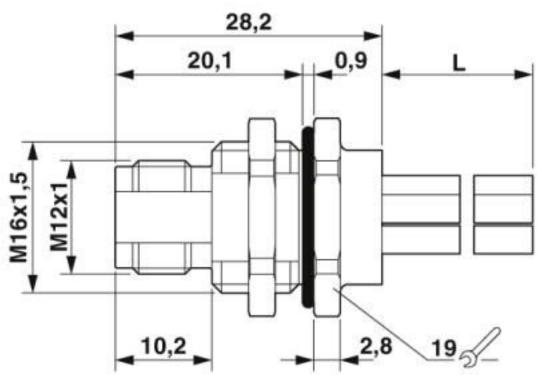

Dimensional drawing

M12 flush-type plug

Classifications

eCl@ss

eCl@ss 10.0.1	27440102
eCl@ss 11.0	27440102
eCl@ss 8.0	27440103
eCl@ss 9.0	27440102

ETIM

ETIM 5.0 EC002061		
	ETIM 5.0	

Approvals

Approvals

Approvals

EAC

Ex Approvals



Approvals

Approval details

EAC
EAC

Accessories

Protective cap

Sealing cap - PROT-M12 FS - 1560251

M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Sealing cap - PROT-M12 FS-M - 1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200 http://www.phoenixcontact.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact: 1162234