

SCP-3-1+

3 Way-0° 50Ω 1 to 300 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.


Pin Connections

SUM PORT	6
PORT 1	1
PORT 2	2
PORT 3	5
GROUND	3.4.7.8

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ± 0.02

Outline Dimensions (inch)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

Demo Board MCL P/N: TB-51
Suggested PCB Layout (PL-062)

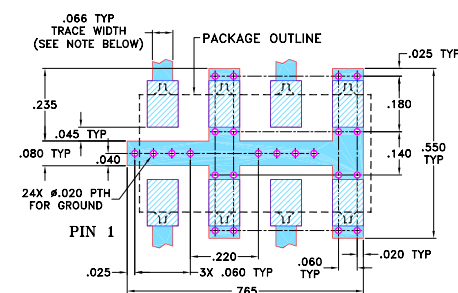

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B
WITH DIELECTRIC THICKNESS .030" $\pm$.002".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED
TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK
OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.4 dB typ.
- good isolation, 25 dB typ.
- excellent output VSWR, 1.1:1 typ.

Applications

- VHF/UHF receivers/transmitters
- communications system



Generic photo used for illustration purposes only

CASE STYLE: YY101

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _c -f _u	30	25	25	20	20	15	0.3	0.6	0.4	0.8	0.7	1.5	1	2	4	0.1	0.15	0.5

L = low range $[f_i \text{ to } 10 f_i]$ M = mid range $[10 f_i \text{ to } f_i/2]$ U = upper range $[f_i/2 \text{ to } f_i]$


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)		Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	2-3					
1.00	5.13	5.13	5.13	0.01	29.54	28.48	0.02	1.17	1.19	1.19	1.20
20.00	5.05	5.06	5.04	0.02	31.30	31.53	0.11	1.12	1.06	1.06	1.06
40.00	5.09	5.08	5.08	0.01	29.82	30.37	0.19	1.13	1.06	1.06	1.06
60.00	5.11	5.11	5.12	0.00	28.34	29.07	0.33	1.15	1.06	1.06	1.06
80.00	5.11	5.11	5.13	0.02	26.92	27.83	0.44	1.17	1.06	1.06	1.05
100.00	5.18	5.17	5.20	0.03	25.71	26.74	0.56	1.19	1.07	1.06	1.05
120.00	5.24	5.23	5.26	0.03	24.65	25.78	0.67	1.22	1.07	1.06	1.05
140.00	5.25	5.24	5.28	0.04	23.74	24.93	0.75	1.25	1.08	1.07	1.05
160.00	5.26	5.25	5.32	0.07	22.93	24.16	0.80	1.27	1.08	1.07	1.05
180.00	5.31	5.29	5.37	0.08	22.22	23.51	0.86	1.29	1.08	1.07	1.05
200.00	5.47	5.45	5.55	0.10	21.71	23.02	1.00	1.32	1.09	1.08	1.05
220.00	5.44	5.42	5.54	0.12	21.15	22.50	1.04	1.34	1.09	1.08	1.06
240.00	5.43	5.41	5.56	0.16	20.71	22.08	1.09	1.36	1.10	1.08	1.06
260.00	5.46	5.43	5.62	0.19	20.32	21.72	1.23	1.37	1.10	1.09	1.06
280.00	5.60	5.57	5.79	0.22	20.06	21.49	1.26	1.39	1.10	1.09	1.06
300.00	5.71	5.66	5.90	0.24	19.86	21.31	1.27	1.40	1.10	1.09	1.06

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

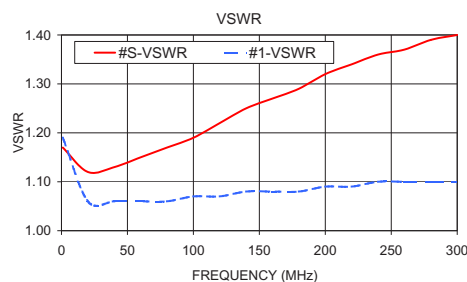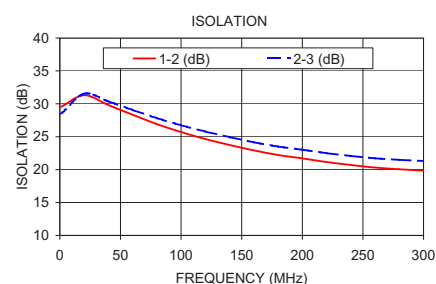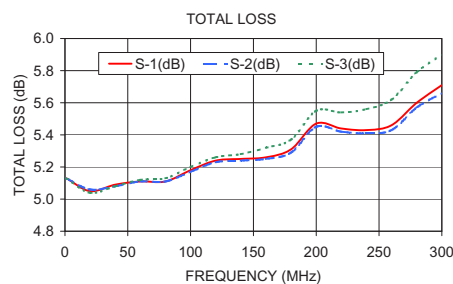

electrical schematic

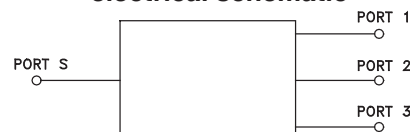

Notes

- A.** Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC/Store/terms_iso

REV. D
M153690
SCP-3-1+
HY/TD/CP/AM
200818



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SCP-3-1+](#)