


High Frequency Wire Wound Transformers

EP13 Reinforced Insulation - PA5000.XXXNL, PA5111.XXXNL, PA5112.XXXNL



- Industry standard footprint with reinforced insulation
- Power Range:** Up to 24W
- Height:** 16.5mm Max
- Footprint:** 17.7mm x 13.5mm Max
- Topology:** Forward and Flyback
- >8.0mm creepage, 5.0kVrms Isolation

Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 130°C ¹					Schematic
PA5000.001NL	Pri. Inductance	(1-3)	100	uH +/- 10%		Forward Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.0	uH Max		
	DCR	(1-3)	130	mΩ Max		
		(10-9)	9.0			
		(7-6)	9.0			
		(4-5)	500			
	Hi-Pot	Pri-Sec	5000	Vac		
K1 Factor	32.9					
PA5000.002NL	Pri. Inductance	(1-3)	100	uH +/- 10%		Forward Transformer
	Lk. Inductance	(10-9)	1.0	uH Max		
	DCR	(1-3)	130	mΩ Max		
		(10-9)	18			
		(7-6)	18			
		(4-5)	500			
	Hi-Pot	Pri-Sec	5000	Vac		
K1 Factor	32.9					
PA5000.003NL	Pri. Inductance	(1-3)	100	uH +/- 10%		Forward Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.0	uH Max		
	DCR	(1-3)	130	mΩ Max		
		(10-9)	50			
		(7-6)	50			
		(4-5)	500			
	Hi-Pot	Pri-Sec	5000	Vac		
K1 Factor	32.9					
PA5111.001NL	Pri. Inductance	(1-3)	80	uH +/- 10%		Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.5	uH Max		
	DCR	(1-3)	180	mΩ Max		
		(10-9)	9.0			
		(7-6)	9.0			
		(4-5)	500			
	Hi-Pot	Pri-Sec	5000	Vac		
K1 Factor	1913					

High Frequency Wire Wound Transformers

EP13 Reinforced Insulation - PA5000.XXXNL, PA5111.XXXNL, PA5112.XXXNL

Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 130°C ¹				Schematic
PA5111.002NL	Pri. Inductance	(1-3)	80 uH +/- 10%		Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.5 uH Max		
	DCR	(1-3)	180	mΩ Max	
		(10-9)	18		
		(7-6)	18		
		(4-5)	500		
	Hi-Pot	Pri-Sec	5000 Vac		
K1 Factor	1913				
PA5111.003NL	Pri. Inductance	(1-3)	80 uH +/- 10%		Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.5 uH Max		
	DCR	(1-3)	180	mΩ Max	
		(10-9)	18		
		(7-6)	18		
		(4-5)	500		
	Hi-Pot	Pri-Sec	5000 Vac		
K1 Factor	1913				
PA5112.001NL	Pri. Inductance	(1-3)	173 uH +/- 15%		Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	3.5 uH Max		
	DCR	(1-3)	475	mΩ Max	
		(10-9)	8		
		(7-6)	6.5		
		(4-5)	185		
	Hi-Pot	Pri-Sec	5000 Vac		
K1 Factor	2579				
PA5112.002NL	Pri. Inductance	(1-3)	160 uH +/- 15%		Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	3.5 uH Max		
	DCR	(1-3)	690	mΩ Max	
		(10-9)	15		
		(7-6)	15		
		(4-5)	210		
	Hi-Pot	Pri-Sec	5000 Vac		
K1 Factor	2355				
PA5112.003NL	Pri. Inductance	(1-3)	155 uH +/- 15%		Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	3.5 uH Max		
	DCR	(1-3)	510	mΩ Max	
		(10-9)	52		
		(7-6)	52		
		(4-5)	175		
	Hi-Pot	Pri-Sec	5000 Vac		
K1 Factor	2305				

High Frequency Wire Wound Transformers

EP13 Reinforced Insulation - PA5000.XXXNL, PA5111.XXXNL, PA5112.XXXNL



Notes:


1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 3250Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$$
3. In high volt- μ sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 3.84E-14 * (Freq_kHz)^{1.63} * (\square B_Gauss)^{2.63}$$
 where $\square B$ can be calculated as:
 For Flyback Topology: $\square B = K1_Factor * I(A)$
 For Forward Topology: $\square B = K1_Factor * Volt\text{-}\mu sec$
4. The standard pin-numbering for this package is indicated in the below mechanical drawing showing pin 1 on the lower right corner and the numbers proceeding clockwise to pin 10 on the upper right corner.
5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA5000.001NL becomes PA5000.001NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) and depth (Ko=13.2mm).

Mechanical

PA5000.XXXNL/ PA5111.XXXNL/ PA5112.XXXNL

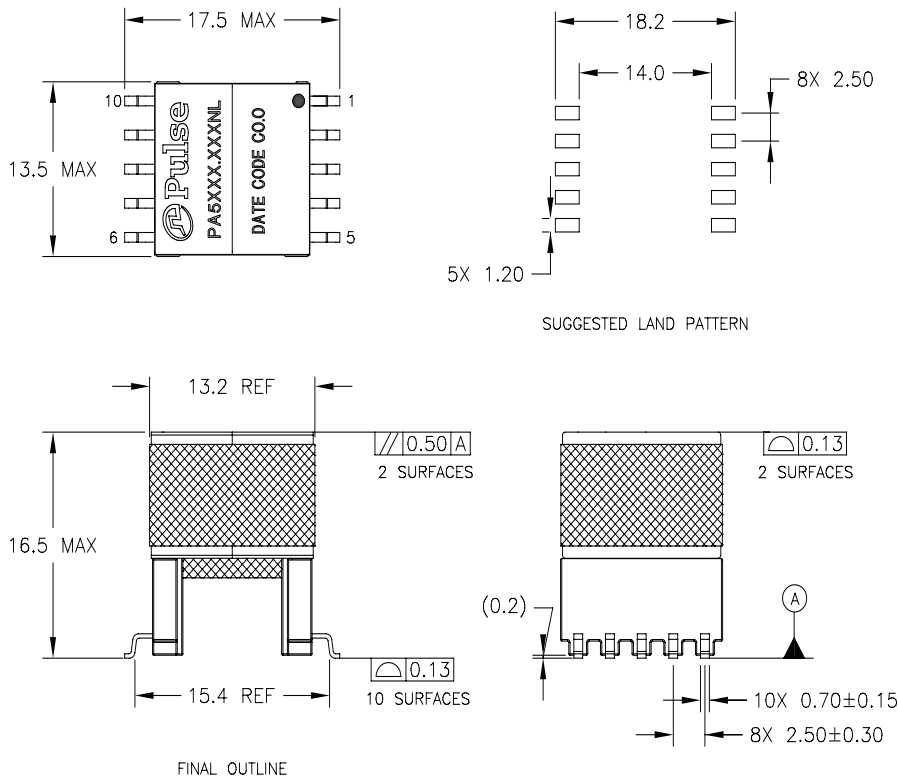

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

3 Fraser Street
0428 DUO Tower
Singapore 189352

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PA5000.001NLT](#) [PA5000.002NLT](#) [PA5000.003NLT](#) [PA5111.001NLT](#) [PA5111.002NLT](#) [PA5111.003NLT](#)
[PA5112.001NLT](#) [PA5112.002NLT](#) [PA5112.003NLT](#)