

Description: 2012 1.71-2.17GHz Low Pass Filter
PART NUMBER: LPF2012LM58R1721A
Features:

- Compact size : 2.00x1.25x0.90mm
- RoHS compliant

Applications:

- WWAN, Penta-Band

ELECTRICAL SPECIFICATIONS

DESCRIPTION	Value
Pass Band	1710~2170 MHz
Impedance	50Ω
Insertion Loss	0.40 dB(Max) at 1710-1980 MHz at 25°C 0.45 dB(Max) at 1980-2025 MHz at 25°C 0.80 dB(Max) at 2025-2170 MHz at 25°C
V.S.W.R	2.0(Max)
Attenuation	15dB Min @ 2400~2500 MHz 9dB Min @ 3840~4050 MHz 15dB Min @ 5130~6075 MHz
Operating Temperature	-40 ~ 85°C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:



Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0




Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998

Description: 2012 1.71-2.17GHz Low Pass Filter

PART NUMBER: LPF2012LM58R1721A

MECHANICAL DIMENSION

Outline




Termination

Terminal name	function
P1	Input
P2	GND
P3	Output

Mechanical

	Dimension
L (mm)	2.00 ±0.15
W (mm)	1.25 ±0.15
T (mm)	0.90 ±0.15
P1 (mm)	0.28 ±0.10
P2 (mm)	0.60 ±0.10
P3 (mm)	0.28 ±0.10
D1 (mm)	0.17 ±0.10
D2 (mm)	0.25 ±0.10
D3 (mm)	0.15 ±0.10
D4 (mm)	0.95 ±0.10

Reference design of EVB

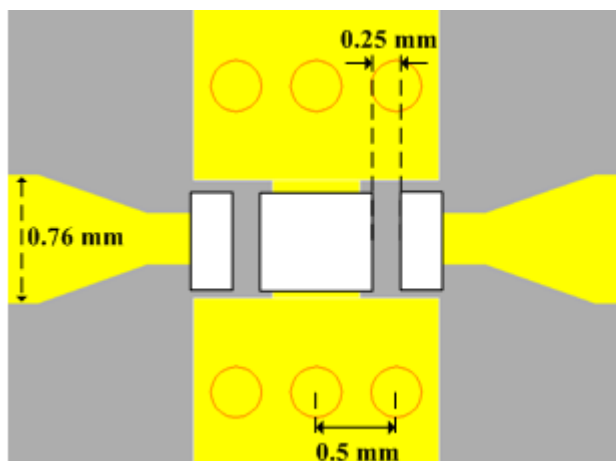

- Solder Resist
- Land
- Via diameter = 0.3 mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2012 1.71-2.17GHz Low Pass Filter

PART NUMBER: LPF2012LM58R1721A

ELECTRICAL PERFORMANCES

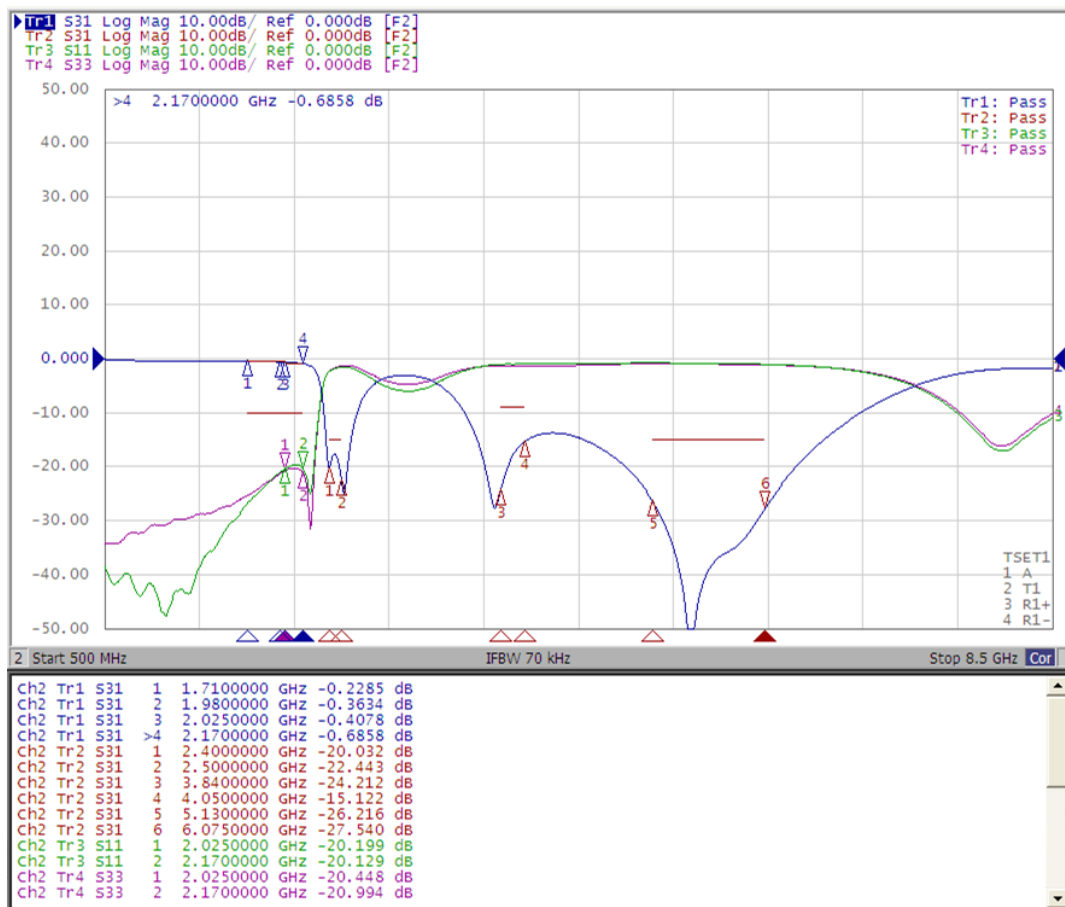

- Measured on Agilent E5071C Network Analyzer
- Input port : Port 1 (Return loss : S11)
- Output port : Port 3 (Insertion loss : S31)

Frequency Characteristics

Description: 2012 1.71-2.17GHz Low Pass Filter

PART NUMBER: LPF2012LM58R1721A

REVISION HISTORY

Revision	Date	Description
Version 1	Nov. 23, 2020	- New issue

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[LPF2012LM58R1721A](#)