

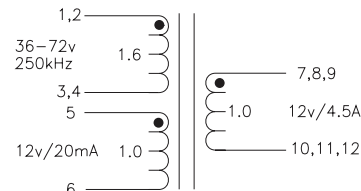
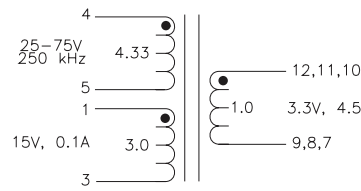
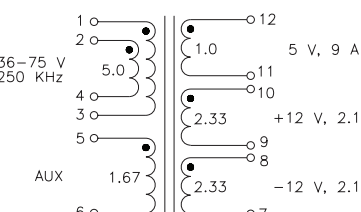
High Frequency Wire Wound Transformers

EFD20 Platforms - SMT



-  **Power Range:** up to 95W
-  **Height:** 11.4mm Max
-  **Footprint:** 29.2mm x 21.8mm Max
-  **Topology:** Forward and Flyback

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

PA0273NL	Pri. Inductance	(1, 2-3, 4)	307μH ±25%	 FORWARD TRANSFORMER
	Lk. Inductance	(1, 2-3, 4) with (5, 6, 9, 10) shorted	0.35μH MAX	
	DCR	(1, 2-3, 4)	65mΩ MAX	
		(7, 8, 9-10, 11, 12)	27mΩ MAX	
		(5-6)	240mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	20.2		
PA0751NL	Pri. Inductance	(1, 2-3, 4)	110μH ±10%	 FLYBACK TRANSFORMER
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	2μH MAX	
	DCR	(4-5)	85mΩ MAX	
		(12, 11, 10-9, 8, 7)	12mΩ MAX	
		(1-3)	300mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1364.8		
PA0769NL	Pri. Inductance	(1, 2-5, 4)	89.2μH ±18%	 FORWARD TRANSFORMER
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	1.5μH MAX	
	DCR	(1, 2-3, 4)	50mΩ MAX	
		(12-11)	3.8mΩ MAX	
		(10-9)=(8-7)	35mΩ MAX	
		(5-6)	110mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	K1 Factor	21.5		

USA 858 674 8100

Germany 49 2354 777 100

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

High Frequency Wire Wound Transformers

EFD20 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

PA1066NL	Pri. Inductance	(3-4)	137 μ H $\pm$ 32%	
	Lk. Inductance	(3-4) with (11, 10, 9, 8) shorted	1.0 μ H MAX	
	DCR	(3-4)	35m Ω MAX	
		(1-2)	199m Ω MAX	
		(5-6)	100m Ω MAX	
		(11-10)=(9-8)	17m Ω MAX	
	Hi-Pot	Pri-Sec	500Vrms	
	K1 Factor	29.3		
PA1366NL	Pri. Inductance	(2, 3-4, 5)	10 μ H $\pm$ 10%	
	Lk. Inductance	(2, 3-4, 5) with (11, 8) shorted	0.3 μ H MAX	
	DCR	(2, 3-4, 5)	15.75m Ω MAX	
		(11-8)	560m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	322.6		
PA1477NL	Pri. Inductance	(1, 2-3, 4)	38.3 μ H $\pm$ 7%	
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	1.0 μ H MAX	
	DCR	(1-3)	72m Ω MAX	
		(2-4)	85m Ω MAX	
		(12, 11, 10-9, 8, 7)	2.5m Ω MAX	
		(5-6)	230m Ω MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
	K1 Factor	772.2		
PA1558NL	Pri. Inductance	(1, 2-3, 4)	11.5 μ H $\pm$ 10%	
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	0.5 μ H MAX	
	DCR	(1, 2-3, 4)	28m Ω MAX	
		(8-7)	12m Ω MAX	
		(12-11)	5m Ω MAX	
		(10-9)	62m Ω MAX	
		(5-6)	190m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	463.7		

High Frequency Wire Wound Transformers

EFD20 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

PA1692NL	Pri. Inductance	(3, 4-5, 6)	73μH ±30%	
	Lk. Inductance	(3, 4-5, 6) with (12, 11, 10, 9, 8, 7) shorted	1.0μH MAX	
	DCR	(3, 4-5, 6)	10.2mΩ MAX	
		(12, 11, 10-9, 8, 7)	5mΩ MAX	
		(1-2)	115mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
	KI Factor	40.3		
				FLYBACK TRANSFORMER
PA1735NL	Pri. Inductance	(1, 2-3, 4)	28.5μH ±5%	
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	1μH MAX	
	DCR	(1, 2-3, 4)	39.0mΩ MAX	
		(12, 11, 10-9, 8, 7)	3.5mΩ MAX	
		(5-6)	230mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
	KI Factor	574.6		
				FLYBACK TRANSFORMER
PA1736NL	Pri. Inductance	(1, 2-3, 4)	20.5μH ±5%	
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	1μH MAX	
	DCR	(1, 2-3, 4)	39.0mΩ MAX	
		(12, 11, 10-9, 8, 7)	8.5mΩ MAX	
		(5-6)	230mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	KI Factor	413.3		
				FLYBACK TRANSFORMER
PA1835NL	Pri. Inductance	(1, 2-3, 4)	4.5μH ±5%	
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	0.25μH MAX	
	DCR	(1, 2-3, 4)	9.5mΩ MAX	
		(12, 11, 10-9, 8, 7)	3mΩ MAX	
		(5-6)	130mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
	KI Factor	241.9		
				FLYBACK TRANSFORMER
PA1836NL	Pri. Inductance	(1, 2-3, 4)	4.5μH ±5%	
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	0.2μH MAX	
	DCR	(1, 2, 3, 4)	9.5mΩ MAX	
		(12, 11, 10-9, 8, 7)	5mΩ MAX	
		(5-6)	130mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
	KI Factor	241.9		
				FLYBACK TRANSFORMER

High Frequency Wire Wound Transformers

EFD20 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

PA1837NL	Pri. Inductance	(1, 2-3, 4)	4.5μH ±5%	FLYBACK TRANSFORMER
	Lk. Inductance	(1, 2-3, 4) with (12, 11, 10, 9, 8, 7) shorted	0.2μH MAX	
	DCR	(1, 2, 3, 4)	9.5mΩ MAX	
		(12, 11, 10-9, 8, 7)	23mΩ MAX	
		(5-6)	130mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vdc	
	KI Factor	241.9		
PA2047NL	Pri. Inductance	(1-3)	7.2μH ±5%	FLYBACK TRANSFORMER
	Lk. Inductance	(1-3) with (11, 10-9, 7) shorted	0.3μH MAX	
	DCR	(1-3)	52mΩ MAX	
		(11, 10-9, 7)	12mΩ MAX	
		(5-6)	240mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA2053NL	Pri. Inductance	(1, 2-5, 6)	292.0μH ±32%	FLYBACK TRANSFORMER
	Lk. Inductance	(1, 2-5, 6) with (12, 11, 10, 9, 8, 7) shorted	1.3μH MAX	
	DCR	(1, 2-5, 6)	78.0mΩ MAX	
		(7, 8-9, 10)	12mΩ MAX	
		(11-12)	43mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA2291NL	Pri. Inductance	(1-4)	57.6μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(1-4) with (all windings) shorted	0.5μH MAX	
	DCR	(1-4)	65mΩ MAX	
		(3-2)	155mΩ MAX	
		(6-5)	145mΩ MAX	
		(7, 8-9, 10)	4mΩ MAX	
		(11-12)	55mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
PA2398NL	Pri. Inductance	(1,2-3,4)	100μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(1, 2-3, 4) with (5, 6, 9,10) shorted	0.45μH MAX	
	DCR	(1, 2-3, 4)	72mΩ MAX	
		(7, 8, 9-10, 11, 12)	15mΩ MAX	
		(5-6)	680mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	KI Factor	16.1		

High Frequency Wire Wound Transformers

EFD20 Platforms - SMT



Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

PB2041NL	Pri. Inductance	(1-6) with (3-4) shorted	491μH ±35%	PRIMARY 12 11 +12V, 3A 9 10 -12V, 1A 8 7
	Lk. Inductance	(1-6) with (all windings) shorted	1μH MAX	
	DCR	(1-3)	36.1mΩ MAX	
		(4-6)	45.6mΩ MAX	
		(8-7)	86.4mΩ MAX	
		(11-9)	86.4mΩ MAX	
		(12-10)	47.8mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	16.1			
FORWARD TRANSFORMER				
PB2089NL	Pri. Inductance	(5, 4-3, 2)	112.0μH MAX	PRIMARY 36-72V 8 9 +3.3V, 10A 10 11 2.2V, 0.05A 7 12 RESET
	Lk. Inductance	(5, 4-3, 2) with (all windings) shorted	1μH MAX	
	DCR	(5-3)	55mΩ MAX	
		(4-2)	67.7mΩ MAX	
		(10, 11-8, 9)	5.5mΩ MAX	
		(12-7)	123mΩ MAX	
		(6-1)	923mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
K1 Factor	24.8			
FORWARD TRANSFORMER				

High Frequency Wire Wound Transformers

EFD20 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$

4. In high volt-sec applications, it is important to calculate the core loss of the transformer.

Approximate transformer core loss can be calculated as:

$$\text{CoreLoss (W)} = 1.32E-13 * (\text{Freq_kHz})^{1.63} * (\Delta B_Gauss)^{2.63}$$

where ΔB can be calculated as:

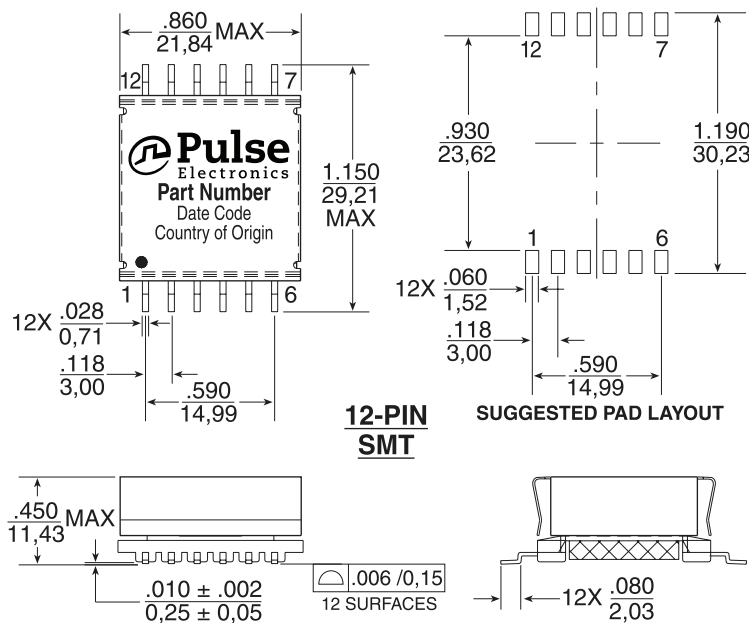
$$\text{For Flyback Topology: } \Delta B = K1_Factor * (A)$$

$$\text{For Forward Topology: } \Delta B = K1_Factor * \text{Volt-}\mu\text{sec}$$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0273NL becomes PA0273NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=44mm), pitch (Po=32mm) an depth (Ko=11.78mm).
6. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

PAXXXXNL / PBXXXXNL



For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2016. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PA1736NLT](#) [PA1837NLT](#) [PA1836NLT](#) [PA0769NLT](#) [PA1366NLT](#) [PA1477NLT](#) [PA1558NLT](#) [PA1692NLT](#)
[PA1735NLT](#) [PA1835NLT](#) [PA2047NLT](#) [PA2053NLT](#) [PA2291NLT](#) [PA2398NLT](#) [PB2089NLT](#)