

Coaxial

# Adapter *SMA-MRP to SMA-M*

**SMRP-SM50+**

50Ω

DC to 12 GHz

## The Big Deal

- Wideband, DC-12 GHz
- Flat response
- Low insertion loss, 0.3 dB typ.
- Excellent VSWR, 1.2:1 typ.



CASE STYLE: DJ951

## Product Overview

Mini-Circuits' SMRP-SM50+ is a 50Ω coaxial SMA-Male Reverse Polarity to SMA-Male adapter supporting a wide range of applications from DC to 12 GHz. This model provides excellent VSWR, low insertion loss, and flat response versus frequency. The SMRP-SM50+ features rugged, passivated stainless steel construction and measures only 0.87" (l) x 0.36" (dia.).

## Key Features

Feature	Advantages
Wideband, DC to 12 GHz	Wide frequency range provides application flexibility and makes this model ideal for broadband and multi-band use
Excellent VSWR, 1.2:1 typ.	Provides good matching for 50Ω systems and minimizes signal reflections across wide frequency range.
Low insertion loss, 0.3 dB typ.	Provides excellent signal power transmission from input to output.
Rugged, passivated stainless steel construction.	Stands up to wear and tear in demanding environments and provides excellent reliability.
Very wide operating temperature range, -55 to +100°C	Withstands extreme operating conditions and is suitable for use near high power componentry where heat rise is common.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Adapter *SMA-MRP to SMA-M*

50Ω DC to 12 GHz

## Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

## Features

- Flat response
- Excellent VSWR, 1.2:1 typ. up to 12 GHz
- Rugged stainless steel body

## Applications

- Connector saver
- Cable extender

## SMRP-SM50+




CASE STYLE: DJ951

Connectors	Model
Conn1	Conn2
SMA-MRP	SMA-M SMRP-SM50+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Outline Drawing

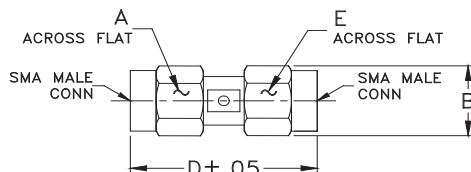

## Outline Dimensions (inch/mm)



A	B	C	D	E	Wt.
.312	.36	--	.87	.312	grams
7.92	9.14	--	22.10	7.92	4.8

## Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range	DC-12	-	-	-	GHz
Insertion Loss	DC-12	-	0.3	0.6	dB
VSWR	DC-5	-	1.05	1.15	:1
	5-12	-	1.22	1.40	

## Typical Performance Data

Frequency (GHz)	Insertion Loss (dB)	VSWR (:1)	
		SMA-MRP	SMA-M
0.01	0.00	1.00	1.00
0.10	0.02	1.01	1.01
0.50	0.06	1.02	1.02
2.00	0.11	1.02	1.03
3.00	0.13	1.03	1.03
4.00	0.14	1.02	1.03
5.00	0.15	1.03	1.04
6.00	0.16	1.11	1.10
6.50	0.17	1.15	1.12
7.00	0.18	1.19	1.15
7.50	0.18	1.20	1.16
8.00	0.19	1.20	1.17
8.50	0.19	1.18	1.18
9.00	0.20	1.16	1.18
9.50	0.19	1.14	1.18
10.00	0.20	1.15	1.19
10.50	0.22	1.18	1.21
11.00	0.23	1.22	1.22
11.50	0.24	1.22	1.22
12.00	0.23	1.21	1.21

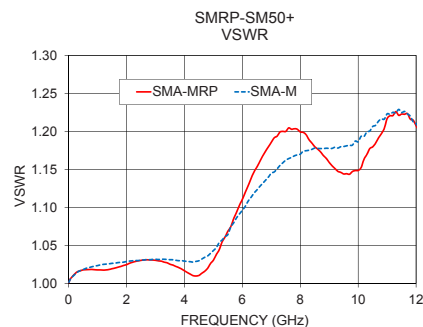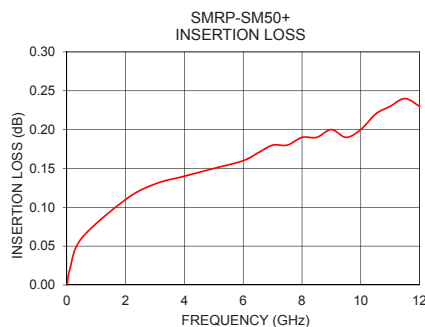

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

REV. OR  
M162939  
SMRP-SM50+  
EDU2179  
URJ  
170810  
Page 2 of 2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SMRP-SM50+](#)