



Mini-Circuits®

SURFACE MOUNT

Bi-Directional Coupler

SYDC-19-52HP+

50Ω 19 dB Coupling 30 to 512 MHz 50 Watt

FEATURES

- High power, 50W max. with output load VSWR 2.0 max
- High power, 20W max. with output open or short
- Low mainline loss, 0.3 dB typ.
- Good VSWR, 1.05 typ.



Generic photo used for illustration purposes only

CASE STYLE: AH1647

APPLICATIONS

- Military mobile

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C¹

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		30		512	MHz
Mainline Loss (above theoretical loss 0.05 dB)	30	—	0.2	0.4	dB
	450	—	0.35	0.6	
	512	—	0.4	0.6	
Coupling	30-512	—	19.5	—	dB
	30	19	19.5	20	
	450	19	19.9	20.8	
	512	19	20.0	21	
Coupling Flatness(±)	30-512	—	0.4	0.6	dB
Directivity	30	22	35	—	dB
	450	18	25	—	
	512	16	22	—	
Return Loss (Input)	30	20	30	—	dB
	450	20	23	—	
	512	17	22	—	
Return Loss (Output)	30	26	31	—	dB
	450	23	26	—	
	512	18	24	—	
Return Loss (Coupling)	30	20	30	—	dB
	450	20	25	—	
	512	17	22	—	
Input Power ²	30-100	—	—	30	W
	100-450	—	—	50	
	450-512	—	—	40	

1. Tested on Evaluation Board TB-SYDC1952HP+

2. The user must provide adequate means of heat removal to limit the temperature of ground connections under the PCB to 65°C, in order to ensure proper performance.


At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 10°C/W or less when the unit is driven at maximum specified RF input power, # W. At higher ambient temperature, with the same heat sink. Input power in watts must not exceed # W x (65°C-Tambient)÷40°C. *Where # =30 W at 30-100 MHz, 50 W at 100-450 MHz and 40 W over 450 to 512 MHz.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 65°C Case*
Storage Temperature	-55°C to 100°C

*Case temperature is defined as temperature on ground leads.
Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

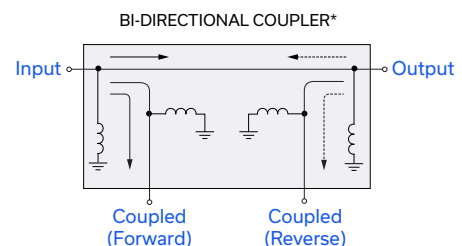

*Electrical schematic is for Bi-Directional coupler with internal transformer(s) that routes DC from all ports to ground

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
ECO-015468
SYDC-19-52HP+
CH/CP/AM
221024

PAGE 1 OF 3



Mini-Circuits

SURFACE MOUNT

Bi-Directional Coupler

SYDC-19-52HP+

50Ω 19 dB Coupling 30 to 512 MHz 50 Watt


PAD CONNECTIONS

INPUT	1
OUTPUT	8
COUPLED (FORWARD)	4
COUPLED (REVERSE)	5
GROUND	2, 3, 6, 7

***PRODUCT MARKING:** SYDC-19-52HP

*Marking may contain other features or characters for internal lot control


SUGGESTED PCB LAYOUT (PL-351)
REFER TO APPLICATION NOTE: [AN-00-017](#)

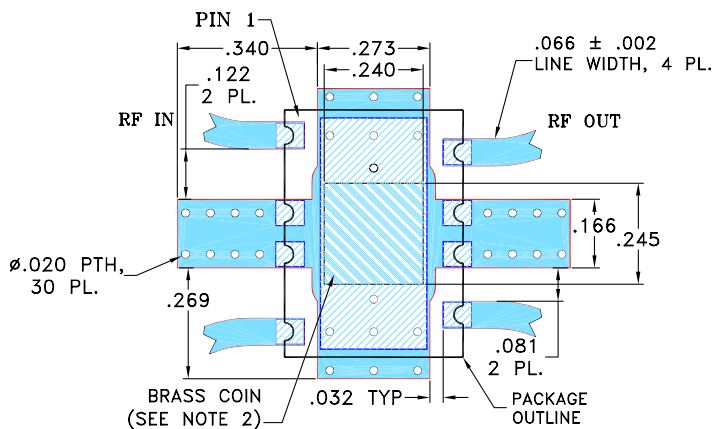


- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. SUGGEST TO PROVIDE BRASS COIN FOR BETTER HEAT TRANSFER FROM THE UNIT. OTHERWISE PROVIDE ARRAY OF THERMAL VIAS ADEQUATE TO LIMIT TEMPERATURE OF GROUND CONNECTIONS UNDER THE UNIT TO 65°C.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK
 DENOTES BRASS COIN.

OUTLINE DRAWING

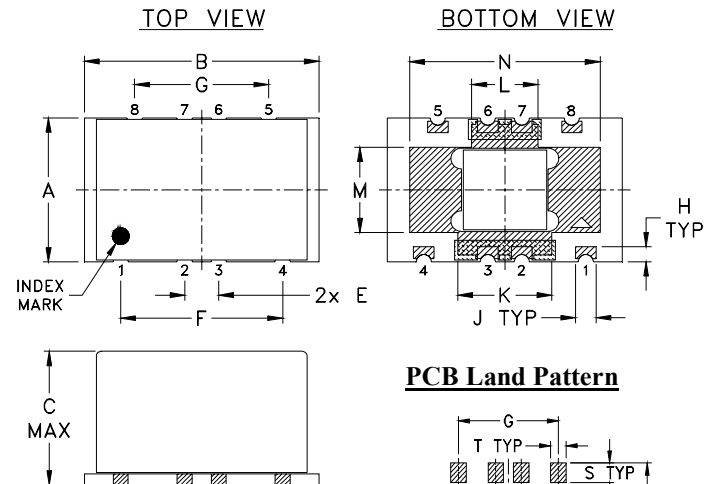

PCB Land Pattern



Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches mm)

A	B	C	E	F	G	H	J	K
.433	.690	.415	.100	.476	.394	.045	.060	.276
11.00	17.53	10.54	2.54	12.09	10.01	1.14	1.52	7.01
L	M	N	P	Q	R	S	T	wt
.194	.257	.560	.475	.561	.258	.069	.061	grams
4.93	6.53	14.22	12.07	14.25	6.55	1.75	1.55	2.80



Mini-Circuits

SURFACE MOUNT




Bi-Directional Coupler

SYDC-19-52HP+

50Ω 19 dB Coupling 30 to 512 MHz 50 Watt

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
30.00	0.20	19.53	19.39	35.44	35.50	30.87	32.42	31.49	32.72
100.00	0.23	19.66	19.57	35.65	35.56	34.30	36.09	34.74	36.52
150.00	0.23	19.70	19.66	34.87	33.97	36.74	37.48	35.35	38.24
200.00	0.25	19.73	19.73	33.09	33.07	35.32	36.68	34.82	37.69
300.00	0.28	19.77	19.86	29.46	29.31	31.78	34.90	31.48	36.27
350.00	0.31	19.79	19.91	27.51	27.57	29.37	33.28	29.43	35.15
400.00	0.33	19.80	19.93	25.71	25.76	27.22	31.60	27.29	33.32
450.00	0.36	19.81	19.94	23.69	23.83	25.29	29.58	25.50	31.16
500.00	0.40	19.82	19.91	21.89	21.95	23.53	27.79	23.80	29.02
512.00	0.41	19.82	19.90	21.51	21.52	23.16	27.41	23.40	28.52

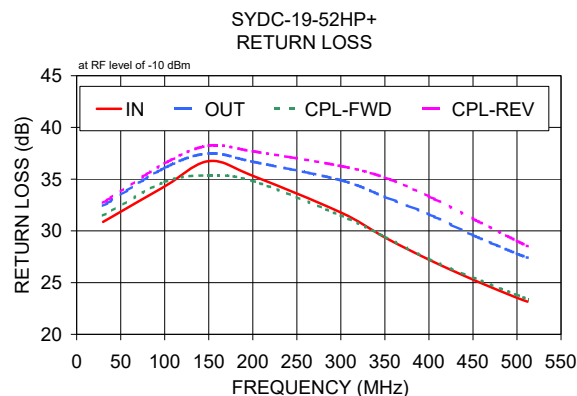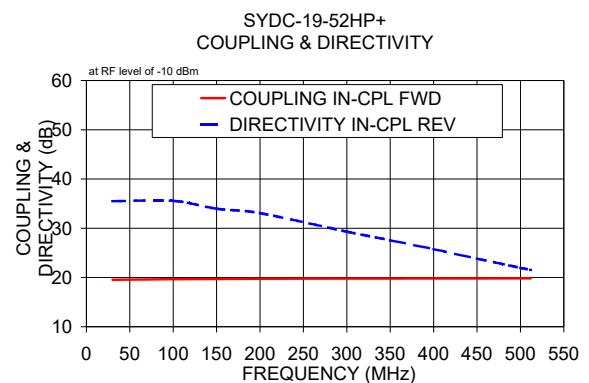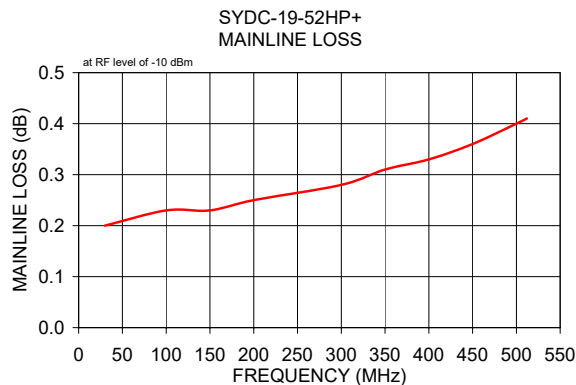

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SYDC-19-52HP+](#)