

Surface Mount Frequency Mixer

Level 10 (LO Power +10 dBm) 1 to 6000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	



Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	
.38	.50	.15	.020	.075	.250	.425	.187	.050	
9.65	12.70	3.81	0.51	1.91	6.35	10.80	4.75	1.27	
K	L	M	N	P	Q	R	S	T	wt.
.050	.070	.270	.540	.060	.095	.445	.208	.415	grams
1.27	1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

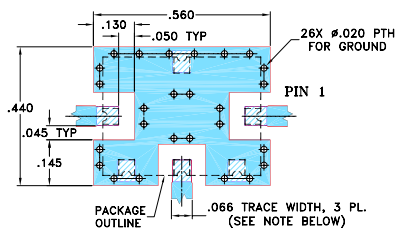

NOTE:

- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- ultra wide bandwidth, 1-6000 MHz
- IF response to DC

Applications

- test equipment
- cable TV
- cellular
- PCS
- satellite distribution
- ISM/GPS
- WCDMA
- defence communications

Electrical Specifications @ 25°C

FREQUENCY (MHz)	CONVERSION LOSS* (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)
		L	M	U	L	M	U	
LO/RF f_L - f_U	Mid-Band m $\bar{X}$ σ Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
1-6000 DC-1000	7.5 0.15 9.5 10.8	65	45	35	20	29	20	60

1 dB COMP: +3 dBm typ.

* Conversion Loss at 30 MHz IF.

σ is a measure of repeatability from unit to unit.

Generic photo used for illustration purposes only

CASE STYLE: TTT166

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications







Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
1.00	31.00	5.83	65.41	60.62	1.68
10.00	40.00	6.07	63.21	58.28	1.09
100.00	130.00	6.21	53.47	46.17	1.04
145.00	175.00	6.21	51.34	43.08	1.04
505.00	535.00	6.28	42.90	33.70	1.37
1000.00	1030.00	6.65	41.76	34.89	2.07
1500.00	1530.00	7.31	32.97	23.84	2.07
2000.00	2030.00	6.87	30.92	24.37	2.01
3000.00	3030.00	8.60	26.67	34.89	2.42
4000.00	4030.00	7.94	28.22	18.49	1.76
5000.00	5030.00	8.24	36.41	19.92	2.09
5100.00	5130.00	8.18	38.17	20.34	2.05
5200.00	5230.00	8.20	40.26	20.55	1.86
5300.00	5330.00	8.25	42.62	20.82	1.65
5400.00	5430.00	8.34	43.72	21.01	1.60
5500.00	5530.00	8.43	42.20	21.03	1.76
5600.00	5630.00	8.60	39.70	21.01	2.11
5700.00	5730.00	8.76	37.69	21.00	2.61
5800.00	5830.00	8.85	36.36	20.92	2.89
6000.00	6030.00	9.28	34.92	20.45	2.77

Electrical Schematic

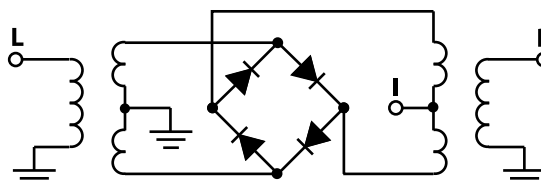

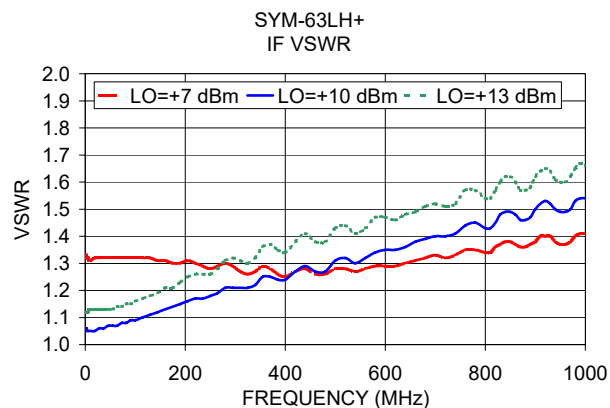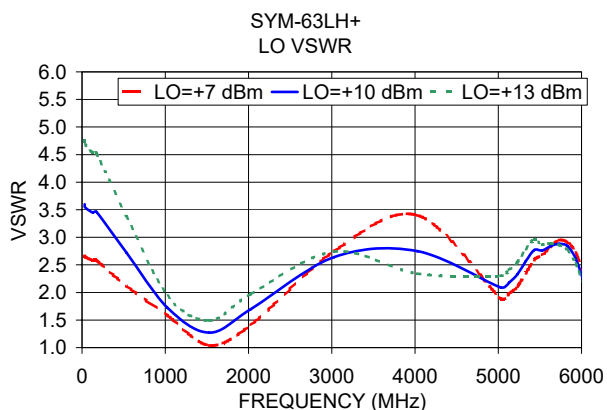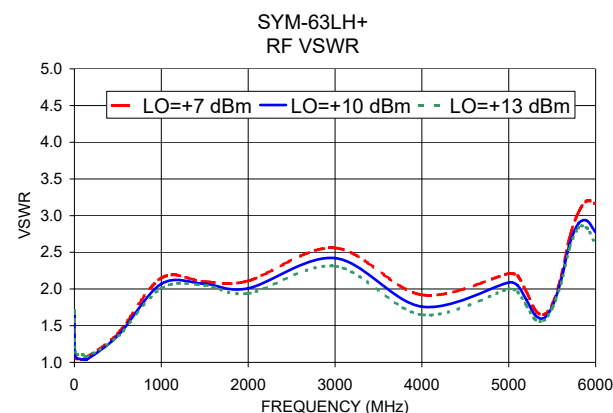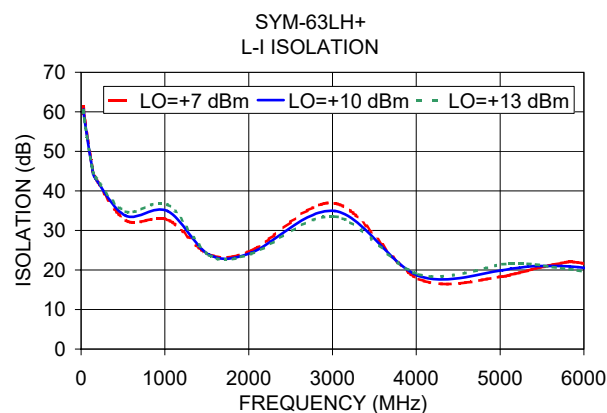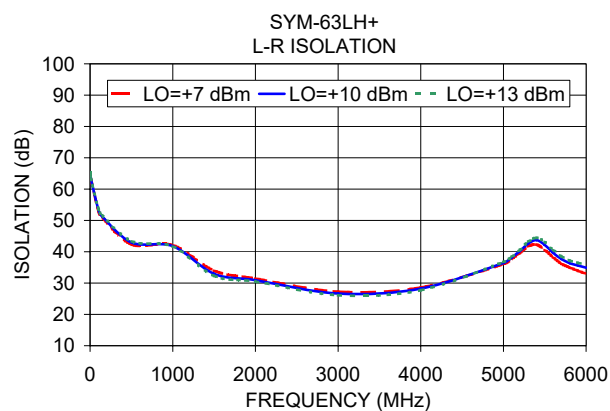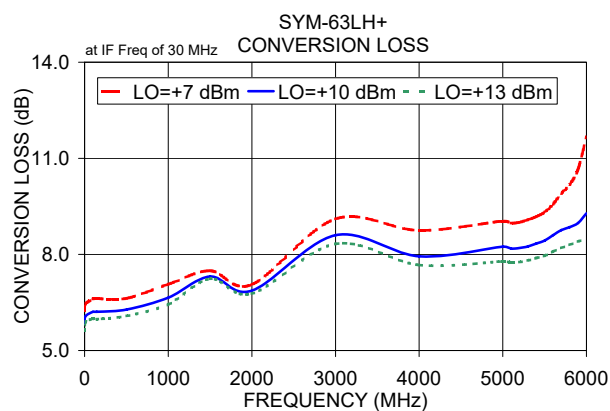

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SYM-63LH+](#)