

## Compact EMC/RFI Filter for Motor Drives




- Compact filter solution for single-phase motor drive applications
- Industrial grade safety terminal blocks
- Designed to meet EN 55011/14/22
- Compliant with IEC 60950



## Performance indicators

### Attenuation performance

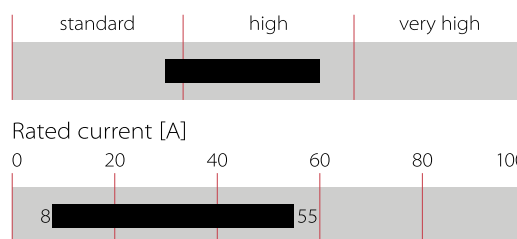

## Technical Specifications

Maximum continuous operating voltage	1x 250 VAC
Nominal operating voltage	230 VAC
Rated currents	8 to 55 A @ 40°C
Overload capability	4x rated current at switch on, 1.5x rated current for 1 minute, once per hour
Operating frequency	DC to 400 Hz
High potential test voltage	P → E 2000 VAC for 2 sec P → N 1100 VDC for 2 sec
Temperature range (operation and storage)	-25°C to +100°C (25/100/21)
Protection category	IP 20
Flammability corresponding to	UL 94 V-0
Design corresponding to	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
MTBF (Mil-HB-217F)	>420,000 h @ 40°C/230 V

## Approvals & Compliances




## Features and Benefits

- High component values optimized for common and differential-mode attenuation in the lower frequency range makes this filter ideal for a large variety of single-phase motor drive applications
- Supplied in a relatively small housing design with safety terminal blocks for fast and easy installation in primarily industrial environments
- FN 350 also meets IEC 60950 requirements, thus providing additional application flexibility



## Typical Applications

- Single-phase motor drives
- Automation equipment
- Power supplies, SMPS
- Office equipment
- Testing and measurements equipment
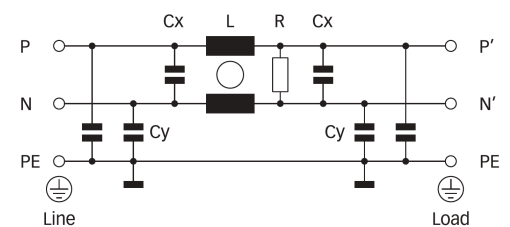
### Typical electrical schematic



Filter Selection Table


Filter	Rated current	Leakage current*	Power loss	Input/Output connections		Weight
	@ 40°C (25°C)	@ 230 VAC/50 Hz	@ 25°C/50 Hz			[kg]
	[A]	[mA]	[W]			
FN 350-8-29	8 (9.0)	4.9	5.2	-29		0.7
FN 350-12-29	12 (13.5)	4.9	5.7	-29		0.7
FN 350-20-29	20 (22.4)	4.9	6.1	-29		0.7
FN 350-30-33	30 (33.6)	5.4	6.1	-33		0.7
FN 350-55-..	55 (61.5)	11.0	9.9	-33	-24	1.2

\* Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


Typical Filter Attenuation

Per CISPR 17; A = 50 Ω/50 Ω sym; B = 50 Ω/50 Ω asym; C = 0.1 Ω/100 Ω sym; D = 100 Ω/0.1 Ω sym


8 A types

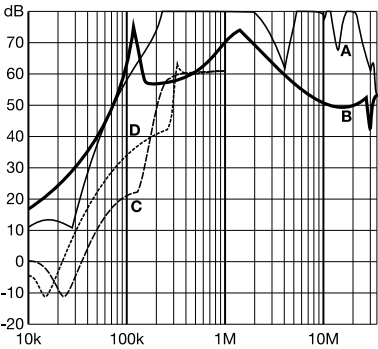


12 A types

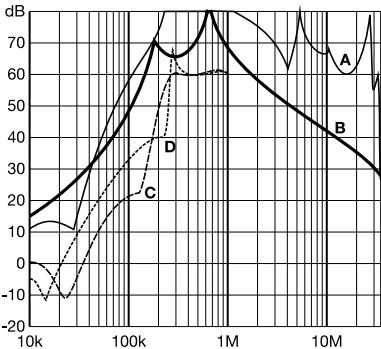

20 and 30 A types

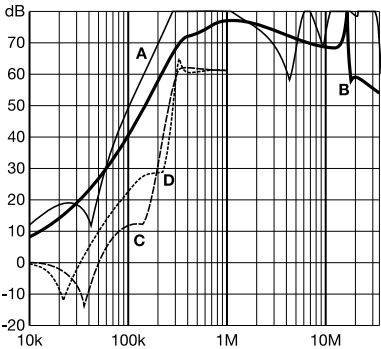


55 A types

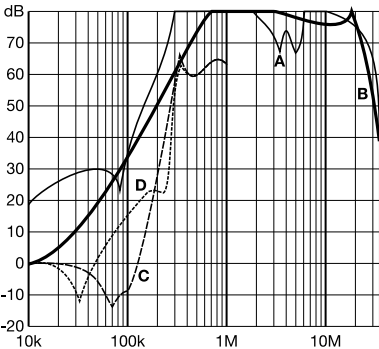


Mechanical Data


8 to 30 A types

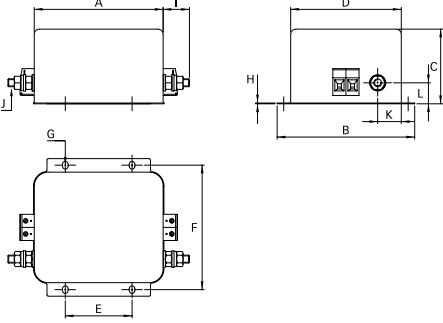

55 A types (terminal -33)

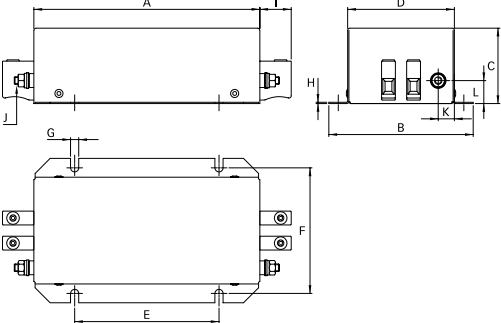

55 A types (terminal -24)

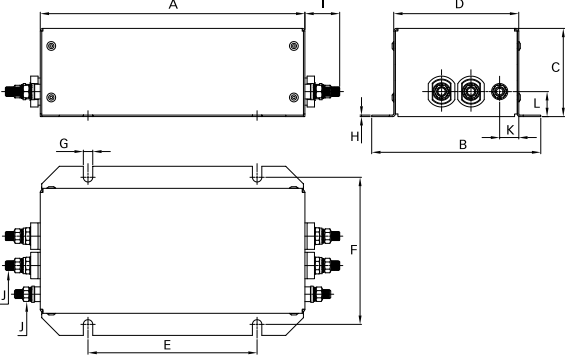

Dimensions

	8 A	12 A	20 A	30 A	55 A (-33)	55 A (-24)
A	99.5	99.5	99.5	99.5	180	180
B	105	105	105	105	115	115
C	57	57	57	57.6	60	60
D	84.4	84.4	84.4	84.4	85	85
E	51	51	51	51	115	115
F	95	95	95	95	100	100
G	6 x 4.4	6 x 4.4	6 x 4.4	6 x 4.4	6.5	6.5
H	0.6	0.6	0.6	1.2	1	1
I	19.5	19.5	19.5	25	25	23.7
J	M6	M6	M6	M6	M6	M6
K	18	18	18	16	12.9	12.9
L	16	16	16	19	18.3	17

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m

Filter Input/Output Connector Cross Sections

	-29	-33	-24 (M6)
Solid wire	6 mm <sup>2</sup>	16 mm <sup>2</sup>	
Flex wire	4 mm <sup>2</sup>	10 mm <sup>2</sup>	
AWG type wire	AWG 10	AWG 6	
Recommended torque	0.6-0.8 Nm	1.5-1.8 Nm	3.5-4.0 Nm

Please visit [www.schaffner.com](http://www.schaffner.com) to find more details on filter connectors.

Headquarters, Global  
Innovation and  
Development

**Switzerland**  
**Schaffner Group**  
Industrie Nord  
Nordstrasse 5  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

To find your local partner within  
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application  
Centers

**Finland**  
**Schaffner Oy**  
Lohjanharjuntie 1109  
08500  
Lohja  
+ 358 50 468 72 84  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

**France**  
**Schaffner EMC S.A.S.**  
16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

**Germany**  
**Schaffner Deutschland GmbH**  
Ohiostr. 8  
76149  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

**Italy**  
**Schaffner EMC S.r.l.**  
Via Ticino, 30  
20900  
Monza (MB)  
+39 335 120 44 32  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

**Japan**  
**Schaffner EMC K.K.**  
ISM Sangenjaya 7F  
1-32-12 Kamiyama Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

**Singapore**  
**Schaffner EMC Pte Ltd.**  
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi  
Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

**Sweden**  
**Schaffner EMC AB**  
Östermalmströg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

**Switzerland**  
**Schaffner EMV AG**  
Industrie Nord  
Nordstrasse 5  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

**India**  
**Schaffner India Pvt. Ltd**  
Regus World Trade Centre  
WTC 22nd Floor Unit No 2238 Brigade  
Gateway Campus 26/1 Dr. Rajkumar Road  
Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

**United Kingdom**  
**Schaffner Ltd.**  
Suite 1 Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[schaffner.uksales@te.com](mailto:schaffner.uksales@te.com)

**United States**  
**Schaffner EMC Inc.**  
52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schaffner:](#)

[FN350-12-29](#) [FN350-20-29](#) [FN350-55-33](#) [FN350-8-29](#) [FN350-30-33](#) [FN350-55-24](#)