

# Surface Mount RF Transformer

50Ω

0.15 to 200 MHz

T9-1+  
T9-1



Generic photo used for illustration purposes only

CASE STYLE: W38

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Maximum Ratings


Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	—
NOT USED	2,5


## Outline Drawing

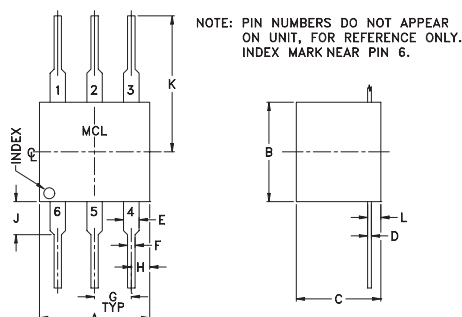

## Outline Dimensions (inch)

A	B	C	D	E	F
.30	.27	.23	.010	.042	.020
7.62	6.86	5.84	0.25	1.07	0.51
G	H	J	K	L	wt
.100	.05	.09	.31	.036	grams
2.54	1.27	2.29	7.87	0.91	0.50

## Config. C



## Features

- wideband, 0.15 to 200 MHz
- good return loss
- also available with plug-in (X65) surface mount gull-wing (KK81) leads

## Applications

- impedance matching
- VHF
- receivers/transmitters

## Transformer Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
9	0.15-200	0.15-200	0.3-150	2-40

\* Insertion Loss is referenced to mid-band loss, 0.7 dB typ.


## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.15	1.74	9.52
0.27	1.27	12.91
0.80	0.86	18.03
20.00	0.70	21.64
70.00	0.88	15.43
105.00	1.03	12.45
130.00	1.17	10.81
155.00	1.35	9.48
182.00	1.54	8.28
200.00	1.65	7.60

T9-1  
INSERTION LOSS

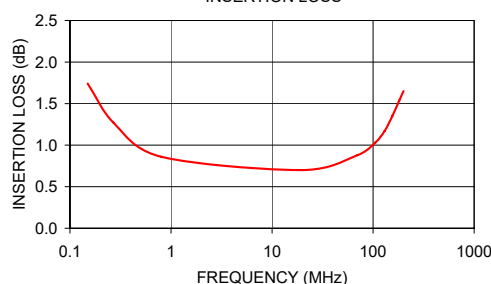

T9-1  
INPUT RETURN LOSS

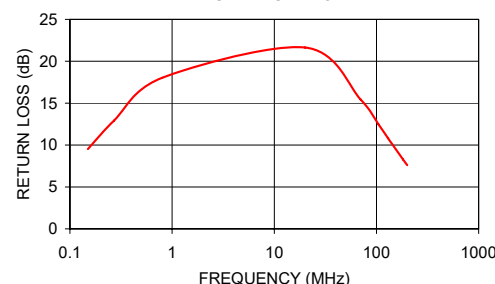

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/VCLStore/terms.jsp](http://www.minicircuits.com/VCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M151107  
T9-1  
IG/TD/CP/AM  
200723

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[T9-1+](#)