


Current-compensated Chokes



- Rated currents from 6 to 64 A
- Up to 600 VAC or 850 VDC
- DC to 400 Hz frequencies
- Dual, triple and quad-choke configurations



Technical Specifications

Rated currents	6 to 64 A @ 40°C
Operating frequency	DC to 400 Hz
High potential test voltage	
winding-to-housing	4000 VAC, 60 sec, guaranteed
winding-to-winding	2500 V, 50 Hz, 2 sec, factory test 2500 VAC, 60 sec, guaranteed
Rated inductance	0.2 to 25 MILLIHENRY
Operating voltage	600 VAC/850 VDC
Surge current @ 10 msec	20 x I _N @ 25 °C
Temperature range (operation and storage)	-25°C to +110°C (25/110/21)
Flammability corresponding to	UL 94 V-0 (insulation tubes UL 94 V-2)
MTBF (Mil-HB-217F)	>5,000,000 h @ 40°C/650 V

Approvals & Compliances

RoHS

RD chokes are attenuating common-mode or asymmetric (P/N => E) interference signals, by being connected in series with the phase and neutral lines of an AC powerline input. Symmetrical components of the noise are also attenuated by the leakage inductance of the windings. These chokes are typically used in conjunction with suppression capacitors.

Features and Benefits

- High saturation resistance and excellent thermal behavior
- Through hole or wire connections
- Dual, triple and quad-choke configuration
- Up to 64 A quad configuration
- Multiple housing options
- Custom-specific versions are available on request

Typical Applications

- Phase-angle control circuits in combination with saturating chokes
- EMI input filters
- For suppressing equipment with no earth connection
- Suppressing high interference levels

Choke Selection Table

Choke	Buy	Nominal current @ 40°C [A]	Inductance L [mH/path]	Resistance R [mΩ/path]	Choke configuration [Qty]	Input/Output connections		Pin footprint connections [mm]	Weight [g]
RD5122-6-9m6		6	9.6	52.55	2	-02		Ø1	160
RD5122-10-6m0		10	6	24.25	2	-02		Ø1.3	160
RD5122-16-2m0		16	2	9.5	2	-02		Ø1.6	160
RD5132-6-5m0		6	5	38	3	-02		Ø1	160
RD5132-10-3m0		10	3	17.6	3	-02		Ø1.3	160
RD5132-16-1m0		16	1	6.9	3	-02		Ø1.6	160
RD6127-6-15m0		6	15	66.65	2		-07	Ø1	235
RD6127-10-9m0		10	9	25.9	2		-07	Ø1.5	235
RD6127-16-3m0		16	3	10.9	2		-07	Ø1.8	235
RD6137-6-7m5		6	7.5	49	3		-07	Ø1	235
RD6137-10-4m5		10	4.5	18.35	3		-07	Ø1.5	235
RD6137-16-1m5		16	1.5	8.3	3		-07	Ø1.8	235
RD7127-6-25m0		6	25	84.2	2		-07	Ø1	320
RD7127-10-14m0		10	14	33.5	2		-07	Ø1.4	350
RD7127-16-5m7		16	5.7	14.1	2		-07	Ø1.8	370
RD7127-25-2m8		25	2.8	6.4	2		-07	Ø2.4	400
RD7127-36-1m0		36	1	3.3	2		-07	Ø2.7	380
RD7137-6-12m0		6	12	60.6	3		-07	Ø1	340
RD7137-10-6m6		10	6.6	21.9	3		-07	Ø1.5	380
RD7137-16-2m8		16	2.8	10.7	3		-07	Ø1.8	380
RD7137-25-1m3		25	1.3	4.45	3		-07	Ø2.5	440
RD7137-36-0m5		36	0.5	2.75	3		-07	Ø2.7	400
RD7147-6-6m0		6	6	45.1	4		-07	Ø1	320
RD7147-10-3m5		10	3.5	19.1	4		-07	Ø1.4	370
RD7147-16-1m5		16	1.5	8.5	4		-07	Ø1.8	390
RD7147-25-0m7		25	0.7	3.65	4		-07	Ø2.4	430
RD7147-36-0m2		36	0.2	2.3	4		-07	Ø2.5	400
RD8127-16-12m0		16	12	20.05	2		-07	Ø2	590
RD8127-25-5m0		25	5	8.45	2		-07	Ø2.4	630
RD8127-36-3m0		36	3	4.55	2		-07	1.5 x 4.5	690
RD8127-50-1m0		50	1	2.5	2		-07	1.7 x 5	640
RD8127-64-0m8		64	0.8	1.6	2		-07	2.5 x 5	710
RD8137-16-5m0		16	5	11.6	3		-07	Ø2	630
RD8137-25-2m5		25	2.5	6.4	3		-07	Ø2.4	650
RD8137-36-1m5		36	1.5	3.65	3		-07	1.5 x 4.5	720
RD8137-50-0m6		50	0.6	2.15	3		-07	1.7 x 5	700
RD8137-64-0m5		64	0.5	1.35	3		-07	2.5 x 5	780
RD8147-16-3m0		16	3	9.25	4		-07	Ø2	650
RD8147-25-1m3		25	1.3	5.05	4		-07	Ø2.4	650
RD8147-36-0m8		36	0.8	3	4		-07	1.5 x 4.5	760
RD8147-50-0m3		50	0.3	1.75	4		-07	1.7 x 5	740
RD8147-64-0m2		64	0.2	1.1	4		-07	2.5 x 5	820

Test conditions:
Measuring frequency: 1 kHz; 500 µA >0.16 mH >1.6 mH; 50 µA >1.6 mH <160 mH
Inductance tolerance: +50%, -30%
Resistance tolerance: ±15% @ 25 °C
Electrical characteristics @ 25°C: ±2°C

Distribution Inventory


Up-to-date inventory levels for global distributors is available at <https://products.schaffner.com/stock>




Typical Choke Attenuation/Resonance Frequency Characteristics

Per CISPR 17; 50 Ω/50 Ω asym


RD 51x2

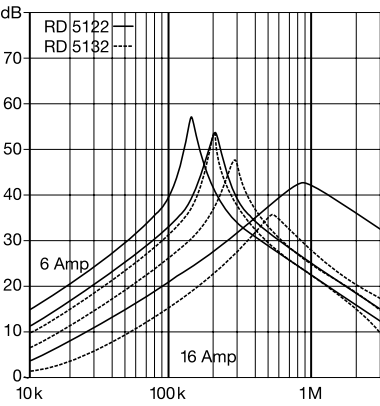


RD 61x7

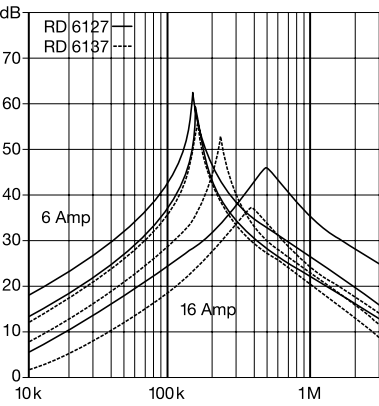


RD 7127

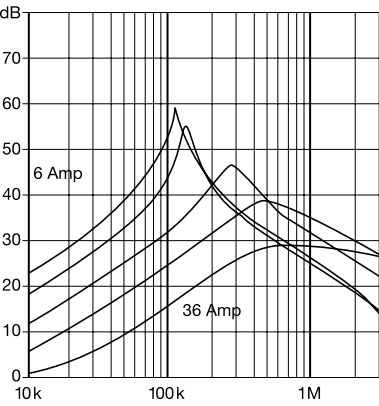


RD 7137

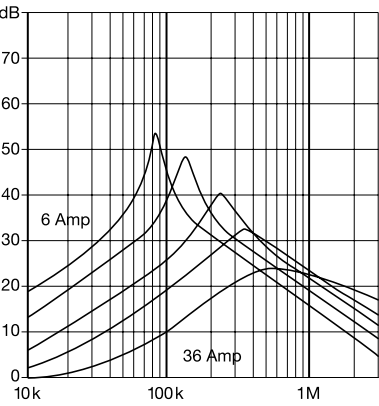


RD 7147

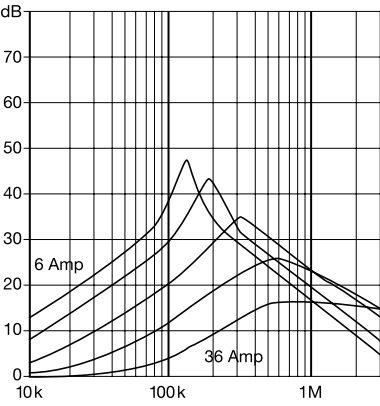


RD 8127

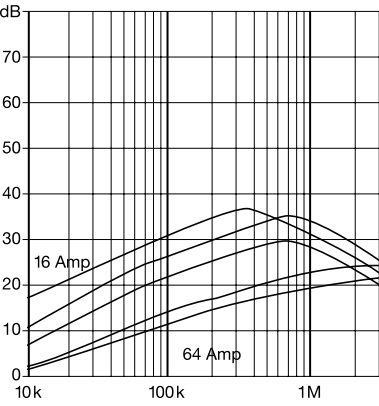

RD 8137

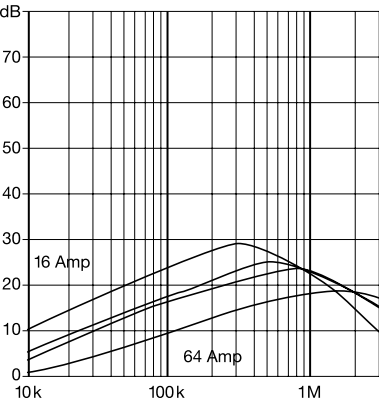


RD 8147

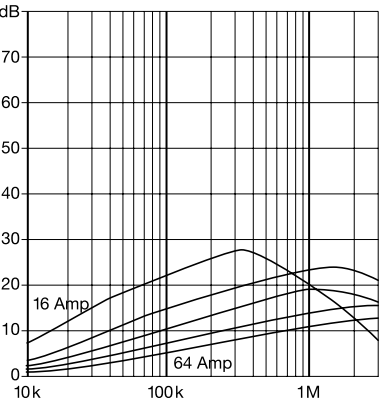


Typical Saturation Characteristics

Inductance (typical value in %) vs. nominal current (A DC)


RD 51x2

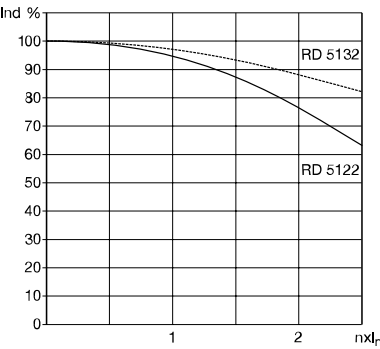


RD 61x7

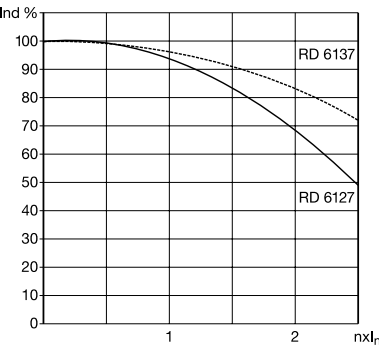






RD 71x7

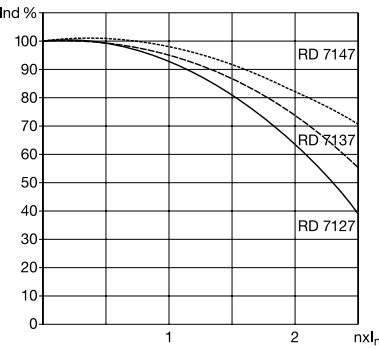

RD 81x7

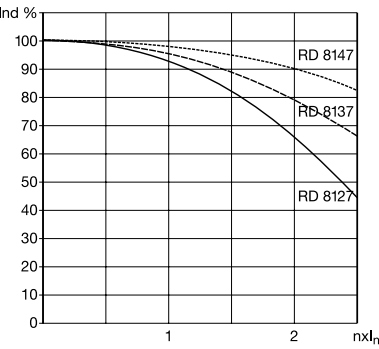

Mechanical Data

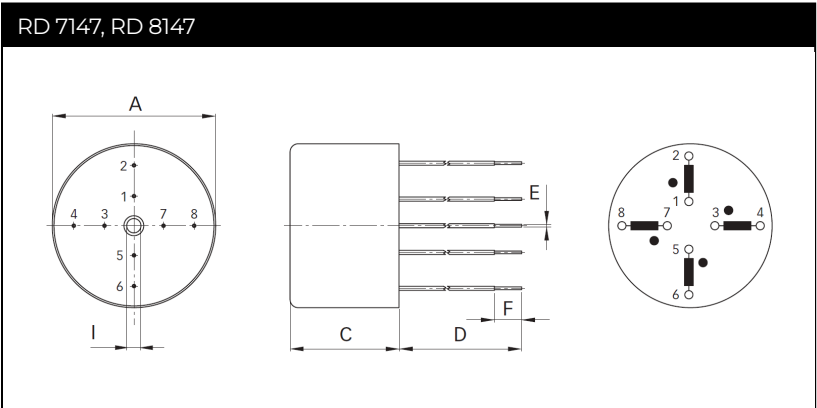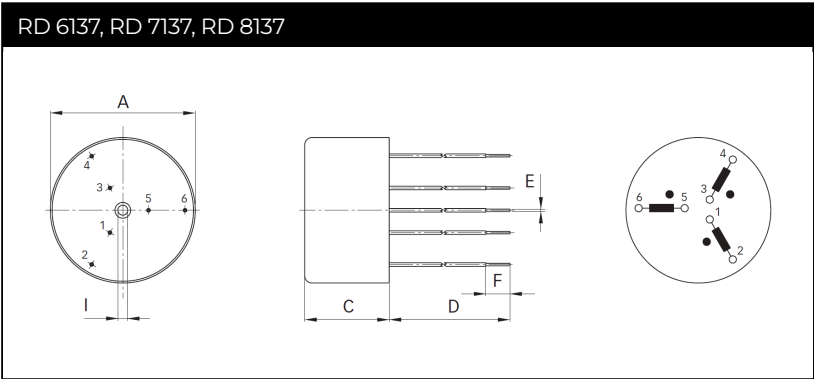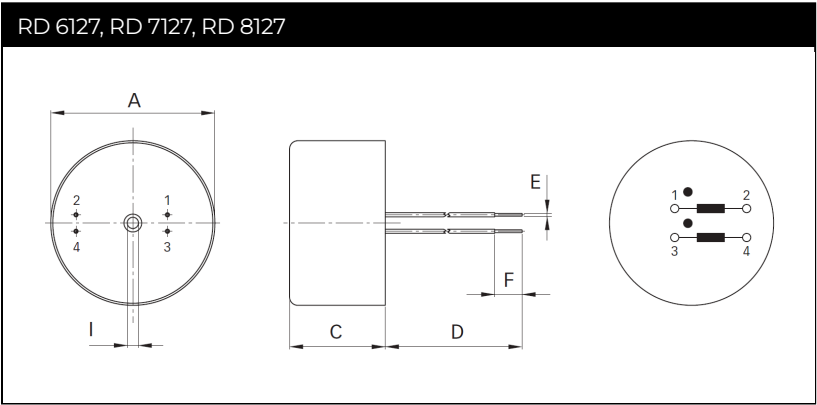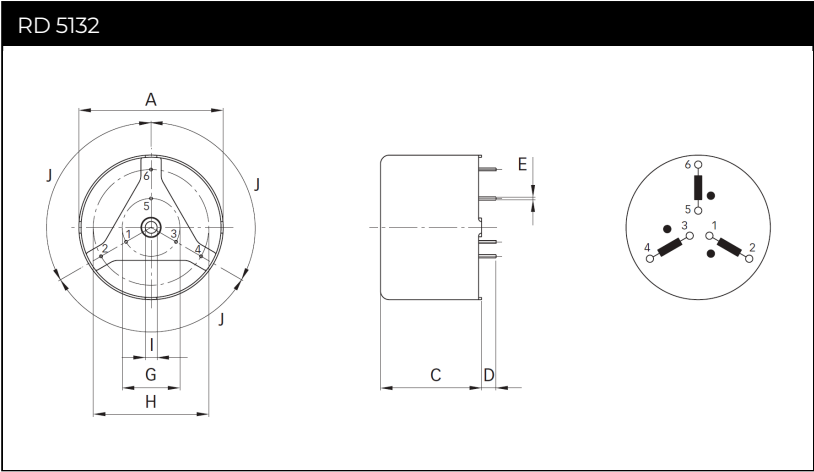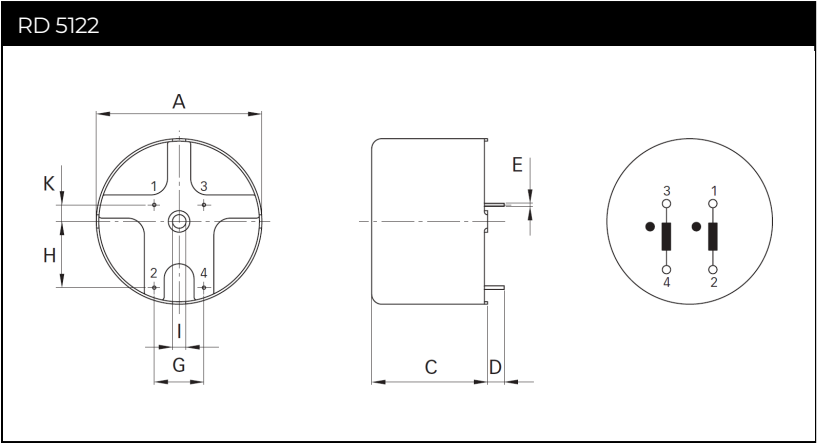

Dimensions

	RD 5122	RD 5132	RD 6127	RD 6137	RD 7127	RD 7137	RD 7147	RD 8127	RD 8137	RD 8147	Tolerances
A	50	50	60	60	70	70	70	80	80	80	±0.5
C	35	35	35	35	40	40	40	50	50	50	±0.5
D	5 ±0.5	5 ±0.5	150	150	150	150	150	200	200	200	+5/-0
E	see choke selection table										
F			10	10	10	10	10	20	20	20	±1
G	15	20									±0.3
H	20	40 ±0.4									±0.3
I	4.1 +3/-0	4.1 +3/-0	4.1 +3/-0	4.1 +3/-0	6.1	6.1	6.1	6.1	6.1	6.1	+6/-0
J		120°									
K	5										

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according: ISO 2768-m/EN 22768-m

Please visit www.schaffner.com to find more details on filter connectors.

Headquarters, Global
Innovation and
Development

Switzerland
Schaffner Group
Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

To find your local partner within
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application
Centers

Finland
Schaffner Oy
Lohjanharjuntie 1109
08500
Lohja
+ 358 50 468 72 84
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
16-20 Rue Louis Rameau
95875
Bezons
+33 1 34 34 30 60
francesales@schaffner.com

Germany
Schaffner Deutschland GmbH
Ohiostr. 8
76149
Karlsruhe
+49 721 56910
germanysales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Ticino, 30
20900
Monza (MB)
+39 335 120 44 32
italysales@schaffner.com

Japan
Schaffner EMC K.K.
ISM Sangenjaya 7F
1-32-12 Kamiuma Setagaya-ku
154-0011
Tokyo
+81 3 5712 3650
japansales@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

Sweden
Schaffner EMC AB
Östermalmströg 1
114 42
Stockholm
+46 8 5050 2425
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

India
Schaffner India Pvt. Ltd
Regus World Trade Centre
WTC 22nd Floor Unit No 2238 Brigade
Gateway Campus 26/1 Dr. Rajkumar Road
Malleshwaram (W)
560055
Bangalore
+91 8067935355
indiasales@schaffner.com

United Kingdom
Schaffner Ltd.
Suite 1 Oakmede Place
Terrace Road
RG42 4JF
Binfield
+44 118 9770070
schaffner.uksales@te.com

United States
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey
+1 732 225 9533
usasales@schaffner.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schaffner:](#)

[RD7127-10-14M0](#) [RD8127-16-12M0](#) [RD8137-50-0M6](#) [RD5122-6-9M6](#) [RD5122-10-6M0](#) [RD5122-16-2M0](#) [RD5132-6-5M0](#) [RD5132-10-3M0](#) [RD5132-16-1M0](#) [RD6127-6-15M0](#) [RD6127-10-9M0](#) [RD6127-16-3M0](#) [RD6137-6-7M5](#) [RD6137-10-4M5](#) [RD6137-16-1M5](#) [RD7127-6-25M0](#) [RD7127-16-5M7](#) [RD7127-25-2M8](#) [RD7127-36-1M0](#) [RD7137-6-12M0](#) [RD7137-10-6M6](#) [RD7137-16-2M8](#) [RD7137-25-1M3](#) [RD7137-36-0M5](#) [RD7147-6-6M0](#) [RD7147-10-3M5](#) [RD7147-16-1M5](#) [RD7147-25-0M7](#) [RD7147-36-0M2](#) [RD8127-25-5M0](#) [RD8127-36-3M0](#) [RD8127-50-1M0](#) [RD8127-64-0M8](#) [RD8137-16-5M0](#) [RD8137-25-2M5](#) [RD8137-36-1M5](#) [RD8137-64-0M5](#) [RD8147-16-3M0](#) [RD8147-25-1M3](#) [RD8147-36-0M8](#) [RD8147-50-0M3](#) [RD8147-64-0M2](#)