



Main

Range of Product	Harmony XVP Universal
Product or Component Type	Indicator bank
Beacon or indicator bank unit type	Audible unit
Mounting diameter	1.97 in (50 mm)
Component name	XVPC
Noise level	55...85 dB 1 m
[Us] rated supply voltage	120 V AC
Housing Colour	Black

Complementary

Signalling type	Continuous or intermittent buzzer
Assembly style	Customer assembly, up to 5 units
Connections - terminals	Screw clamp terminals, 1 x 1.5 mm ² with cable end
Marking	CE
[Ui] rated insulation voltage	250 V IEC 60947-1
Nominal voltage limit	0.85...1.1 Un IEC 60947-5-1
Current Consumption	<= 15 mA
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1
Fundamental frequency	10 adjustable levels
CAD overall width	2.20 in (56 mm)
CAD overall height	5.08 in (129 mm)
CAD overall depth	2.20 in (56 mm)
Net Weight	0.34 lb(US) (0.153 kg)

Environment

Product Certifications	cULus
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-13...122 °F (-25...50 °C)
Electrical shock protection class	Class I on support tube IEC 61140 Class II on base unit IEC 61140
IP degree of protection	IP43 IEC 60529

Ordering and shipping details

Category	22615 - XVP 50MM INDICATING BANKS
Discount Schedule	XV
GTIN	00785901276685
Nbr. of units in pkg.	1
Package weight(Lbs)	0.37 lb(US) (0.17 kg)
Returnability	No
Country of origin	CN

Packing Units

Package 1 Height	0.650 dm
Package 1 width	0.704 dm
Package 1 Length	1.300 dm


Contractual warranty

Warranty	18 months
----------	-----------

Indicator Bank with Audible Unit

Dimensions


Below drawing shows an indicator bank with 1 audible stage and 1 illuminated stage. Select the number of stages according to the product characteristics in order to get b dimension.

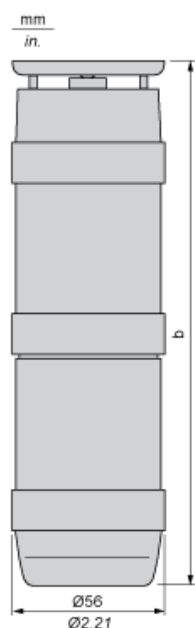

Number of illuminated units	+ Audible	b in mm	b in in.
0	+ 1	129	5.08
1	+ 1	194	7.64
2	+ 1	256	10.08
3	+ 1	318	12.52
4	+ 1	380	14.96

Indicator Bank

Adjustment of Audible Signal for Buzzer



- 1 Volume adjustment potentiometer: 55...85 dB. Use either cross headed or flat tipped screwdriver.
- 2 Adjustment of type of audible signal according to position of 2 links. Use flat-nose pliers.

10 configurations are possible:

Conf.	Position of links and type of audible signal	
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XVPC09G](#)