

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of product	Preventa Safety detection
Product or component type	Safety thru-beam pair photo-electric sensors
Device short name	XU2S
Output type	1 safety outputs OSSD PNP
[Sn] nominal sensing distance	26.25 ft (8 m)

Complementary

Detection system	Transmitter-receiver system
[Us] rated supply voltage	12...24 V DC (10...30 V) reverse polarity protection
Current consumption	<= 35 mA no-load
Voltage drop	<= 1.5 V closed state
Switching capacity in mA	<= 100 mA (overload and short-circuit protection)
Switching frequency	500 Hz maximum
Electrical connection	Pre-cabled
Line of sight type	Along case axis
Delay response	<= 1 ms
Delay recovery	<= 1 ms
Cable outer diameter	0.2 in (5 mm)
Cable length	16.4 ft (5 m)
Cable composition	3 x 0.34 mm ² transmitter 4 x 0.34 mm ² receiver
Tightening torque	24 N.m fixing nut
Function available	Built-in muting function Light or dark programmable switching
Marking	CE
Material	Case : nickel plated brass Lenses : PMMA (polymethyl methacrylate)
Product weight	1.07 lb(US) (0.485 kg)

Environment


Standards	EN/IEC 60825-1 EN/IEC 61496-2 EN/IEC 61496-1
Safety level	Type 2 conforming to IEC 61496-1-2 Can reach PL = c conforming to EN/ISO 13849-1 (associated with module XP-SCM correctly wired) Can reach category 2 conforming to EN/ISO 13849-1 (associated with module XPSCM correctly wired)
Ambient air temperature for operation	-13...131 °F (-25...55 °C)
Safety reliability data	PFH = 4.6E-7 1/h conforming to IEC 61508 PFH = 5.5E-7 1/h conforming to IEC 61508 (with muting function)
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
IP degree of protection	IP67 conforming to EN/IEC 60529

Shock resistance	30 gn (3 axes : 3 times) conforming to EN/IEC 60068-2-27
Vibration resistance	7 gn (f = 10...55 Hz) conforming to EN/IEC 60068-2-6

Ordering and shipping details

Category	22477 - SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
GTIN	00785901907404
Nbr. of units in pkg.	1
Package weight(Lbs)	1.1000000000000001
Returnability	N
Country of origin	FR

Offer Sustainability


RoHS (date code: YYWW)	Compliant - since 1005 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
- - - - - Substance 2	Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------


Dimensions

Receiver

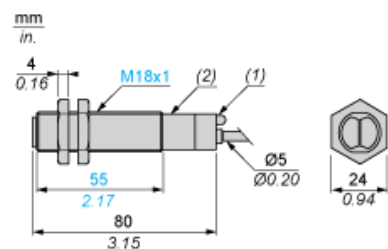

- (1) LED
- (2) Potentiometer


Transmitter

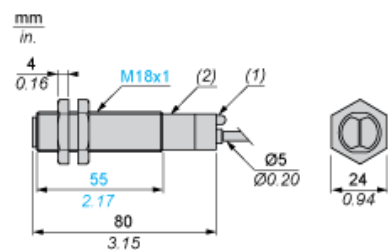

- (1) LED
- (2) Potentiometer

Wiring Schemes (3-wire DC)


Transmitter



BU : Blue
BN : Brown
VI : Violet
(1) Test


Beam Break Test

Beam Made



BU : Blue
BN : Brown
VI : Violet


Beam Broken



BU : Blue
BN : Brown
VI : Violet


Receiver

Light switching (no object present). PNP output



BN : Brown
BU : Blue
BK : Black
OG : Orange

Dark switching (no object present). PNP output



BN : Brown
BU : Blue
BK : Black
OG : Orange

Connecting to a Safety Module

Discover
XU2S18PP340D by

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Performance Curves
- **Download & Documents**

Download & Documents 1 to 8 of 8

CAD

Preventa - Photo-electric sensors - Thru beam, pair - Ref. XU2S18PP340D
SILENT 2015-07-21
(Se ▼)

Preventa - Photo-electric sensors - Thru beam, pair - Ref. XU2S18PP340D
SILENT 2009-10-23
(Se ▼)

Instruction sheet

XU2S18... Cylindrical photo-electric sensor design 18
English 2015-07-21
pdf ▼

Product environmental

XUB... XU1... to XU9... Photoelectric Sensor, Product Environmental profile
English 2012-03-19
pdf ▼

End of life manual

XUB... and XU1... to XU9... Photoelectric Sensors, Product End-of-life Instructions
English 2012-02-20
pdf ▼

System user guide

Connecting to a monitoring device XU2S
English 2015-06-08
pdf ▼

Catalog

Safety light curtains Preventa XUSL
English 2015-05-18
pdf ▼

Image of product

Security light curtain XU2S
SILENT 2015-07-21
(Se ▼)

1


2

- 1 : Click on Download & Documents
- 2 : Click on System user guide

To have all connection schematics concerning our safety module, select "download and document" and download the file "Connecting to a monitoring device XU2S"


Curves

Infrared Detection Curve



(1) Ø of beam

Verification of Correct Operation



- (1) LED off
- (2) LED on
- (3) Red LED
- (4) Signal level
- (5) Optimum alignment

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XU2S18PP340L5](#)