

Model MIQ24MS-2

Communications Band

RF 1.9 to 4.2 GHz

Electrical Specifications:⁽¹⁾

	Conditions			Specifications		
Parameter	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max
SSB Conversion loss: ⁽²⁾ ⁽³⁾	2.0-4.2	2.0-4.2	DC-500		5.5 dB	7.0 dB
	1.9-4.2	1.9-4.2	DC-500		6.0 dB	7.5 dB
Image Rejection Side-band Suppression: ⁽⁴⁾	1.9-2.0	1.9-2.0	DC-500	18 dB	26 dB	
	2.0-4.2	2.0-4.2	DC-500	20 dB	32 dB	
Amplitude Match	1.9-4.2	1.9-4.2	DC-500		0.2 dB	
Phase Match	1.9-4.2	1.9-4.2	DC-500		2 deg	
Isolation						
LO to RF:		1.9-4.2		34 dB	42 dB	
LO to I/Q:		1.9-4.2			30 dB	
RF to I/Q:	1.9-4.2				24 dB	
I/Q to RF:			DC-500		40 dB	
Input 1 dB Compression Point:	1.9-4.2	1.9-4.2	DC-500		+6 dBm	MIQ24
Input Third Order Intercept Point:	1.9-4.2	1.9-4.2	DC-500		+14 dBm	MIQ24
LO Power: ⁽⁵⁾	1.9-4.2	1.9-4.2	DC-500		+10 dBm	MIQ24

Model MIQ2xMS-2

LO Power

dB Power:
- 4 = +10 dBm

MIQ24MS-2
Page 1



MIQ26MS-2
Page 2

MIQ27MS-2
Page 3

Notes:

1. Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25°C with the nominal LO power. Specifications indicated as typical are not guaranteed.
2. Noise figure is typically within ± 0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
3. Conversion loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C. Conversion loss is the combined value.
4. Measured with an IF quadrature hybrid whose amplitude and phase errors are 0.5 dB and 3 degrees maximum. An IF quadrature hybrid is not included.
5. Usable LO drives are up to 2 dB below to 3 dB above nominal.
6. See Application notes M112, for aid in selecting the outline and for mounting and installation information.

Typical Performance at 25°C

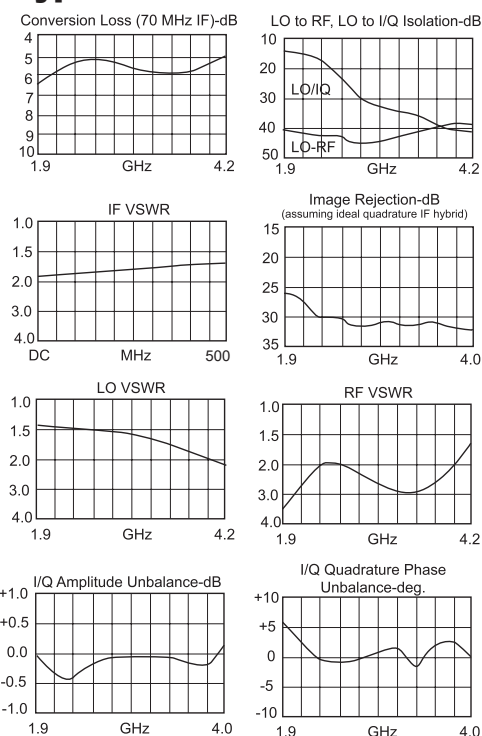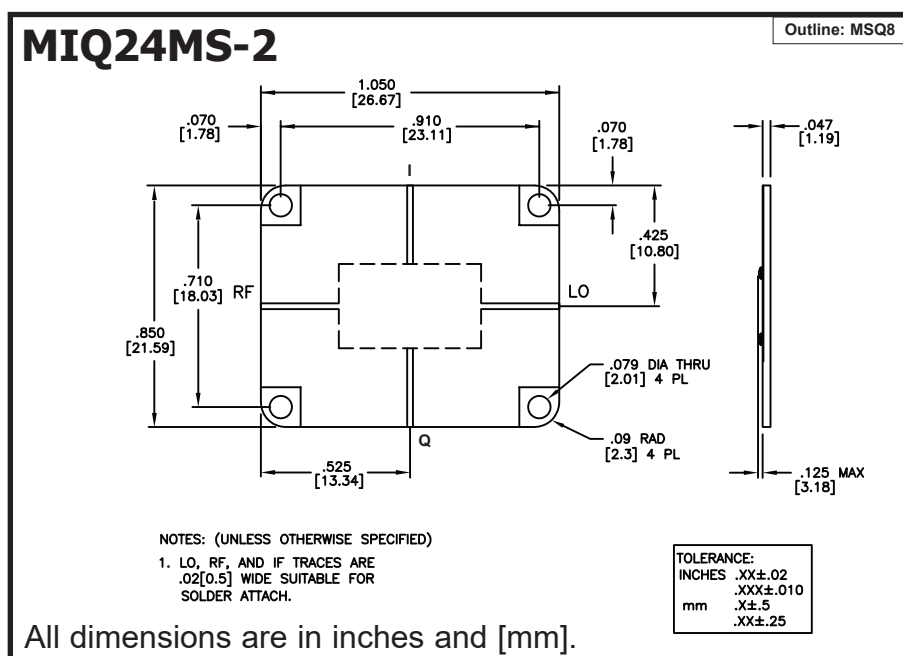

I/Q Mixer / Modulator

Model MIQ26MS-2

Communications Band

RF 1.9 to 4.2 GHz

Electrical Specifications:⁽¹⁾

Parameter	Conditions			Specifications		
	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max
SSB Conversion loss: ^{(2) (3)}	2.2-4.2	2.2-4.2	DC-500		5.5 dB	7.0 dB
	1.9-4.2	1.9-4.2	DC-500		6.0 dB	9.0 dB
Image Rejection Side-band Suppression: ⁽⁴⁾	1.9-2.0	1.9-2.0	DC-500	18 dB	26 dB	
	2.0-4.2	2.0-4.2	DC-500	20 dB	32 dB	
Amplitude Match	1.9-4.2	1.9-4.2	DC-500		0.2 dB	
Phase Match	1.9-4.2	1.9-4.2	DC-500		2 deg	
Isolation						
LO to RF:		1.9-4.2		30 dB	42 dB	
LO to I/Q:		1.9-4.2			30 dB	
RF to I/Q:	1.9-4.2				24 dB	
I/Q to RF:			DC-500		40 dB	
Input 1 dB Compression Point:	1.9-4.2	1.9-4.2	DC-500		+9 dBm	MIQ26
Input Third Order Intercept Point:	1.9-4.2	1.9-4.2	DC-500		+17 dBm	MIQ26
LO Power: ⁽⁵⁾	1.9-4.2	1.9-4.2	DC-500		+13 dBm	MIQ26

Model MIQ2xMS-2

LO Power

6 = +13 dBm

MIQ24MS-2

Page 1

MIQ26MS-2

Page 2



MIQ27MS-2

Page 3

Notes:

- Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25°C with the nominal LO power. Specifications indicated as typical are not guaranteed.
- Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
- Conversion loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C. Conversion loss is the combined value.
- Measured with an IF quadrature hybrid whose amplitude and phase errors are 0.5 dB and 3 degrees maximum. An IF quadrature hybrid is not included.
- Usable LO drives are up to 2 dB below to 3 dB above nominal.
- See Application notes M112, for aid in selecting the outline and for mounting and installation information.

Typical Performance at 25°C

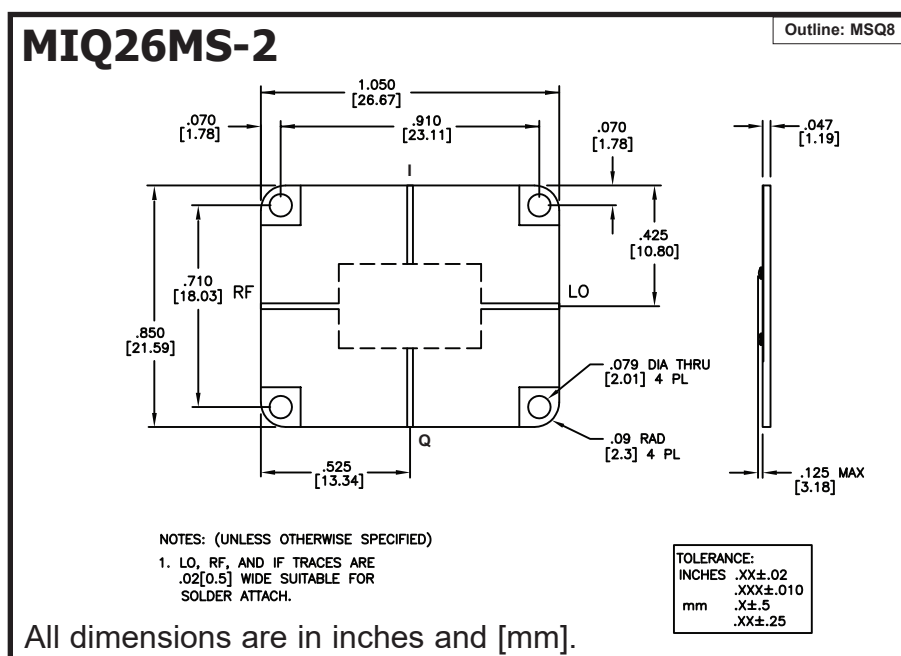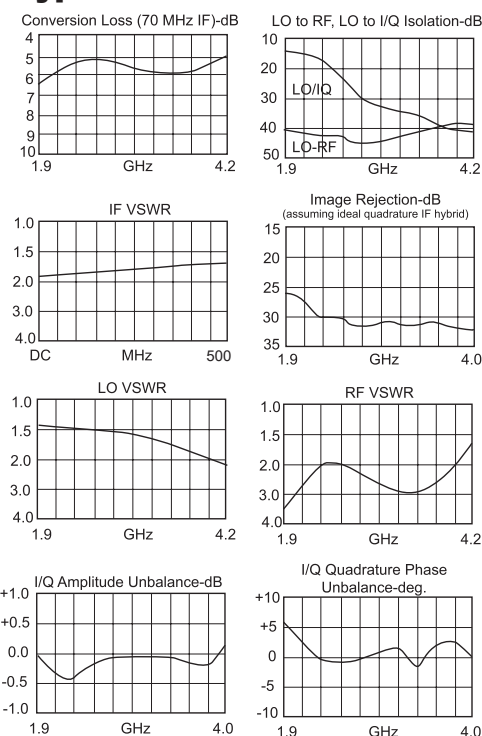

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, FL 32905 · PH (888) 553-7531 · Fax (888) 553-7532

REV
4/19/18

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, PA 19154 · PH (215) 464-4000 · Fax (215) 464-4001

I/Q Mixer / Modulator

Model MIQ27MS-2

Communications Band

RF 1.9 to 4.2 GHz

Electrical Specifications:⁽¹⁾

Parameter	Conditions			Specifications		
	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max
SSB Conversion loss: ^{(2) (3)}	2.0-4.2	2.0-4.2	DC-500		5.5 dB	7.0 dB
	1.9-4.2	1.9-4.2	DC-500		6.0 dB	7.5 dB
Image Rejection Side-band Suppression: ⁽⁴⁾	1.9-2.0	1.9-2.0	DC-500	18 dB	26 dB	
	2.0-4.2	2.0-4.2	DC-500	20 dB	32 dB	
Amplitude Match	1.9-4.2	1.9-4.2	DC-500		0.2 dB	
Phase Match	1.9-4.2	1.9-4.2	DC-500		2 deg	
Isolation						
LO to RF:		1.9-4.2		34 dB	42 dB	
LO to I/Q:		1.9-4.2			30 dB	
RF to I/Q:	1.9-4.2				24 dB	
I/Q to RF:			DC-500		40 dB	
Input 1 dB Compression Point:	1.9-4.2	1.9-4.2	DC-500		+13 dBm	MIQ27
Input Third Order Intercept Point:	1.9-4.2	1.9-4.2	DC-500		+21 dBm	MIQ27
LO Power: ⁽⁵⁾	1.9-4.2	1.9-4.2	DC-500		+17 dBm	MIQ27

Model MIQ2xMS-2

LO Power

7 = +10 dBm

MIQ24MS-2
Page 1



MIQ26MS-2
Page 2

MIQ27MS-2
Page 3

Notes:

- Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25°C with the nominal LO power. Specifications indicated as typical are not guaranteed.
- Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
- Conversion loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C. Conversion loss is the combined value.
- Measured with an IF quadrature hybrid whose amplitude and phase errors are 0.5 dB and 3 degrees maximum. An IF quadrature hybrid is not included.
- Usable LO drives are up to 2 dB below to 3 dB above nominal.
- See Application notes M112, for aid in selecting the outline and for mounting and installation information.

Typical Performance at 25°C

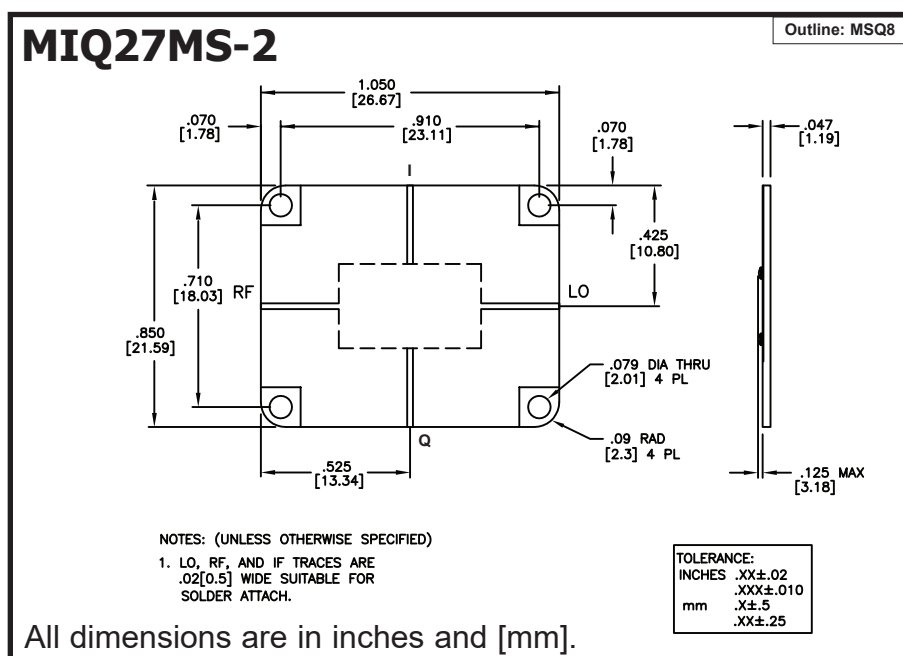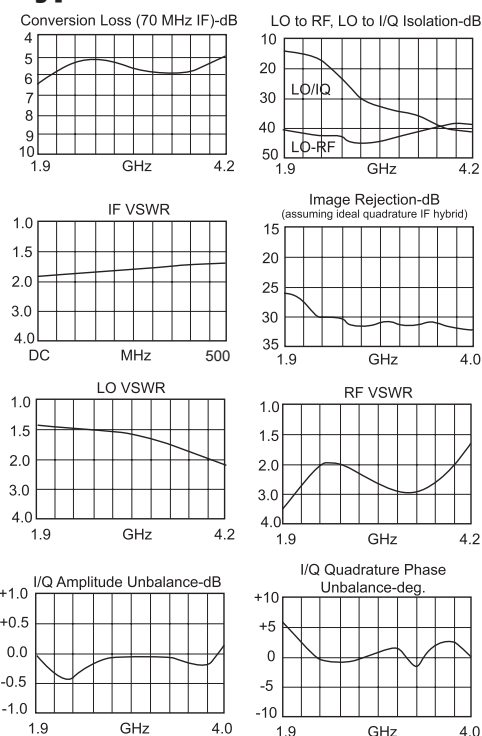

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, FL 32905 · PH (888) 553-7531 · Fax (888) 553-7532

REV
4/19/18

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, PA 19154 · PH (215) 464-4000 · Fax (215) 464-4001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[API Technologies:](#)

[MIQ24MS-2](#)