



DWG. NO.	031-3601		
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
A	21675	12/03/91	
B	24898	7/18/02	
C	25108	4/22/03	
		ADDED 2.38 R DIM	

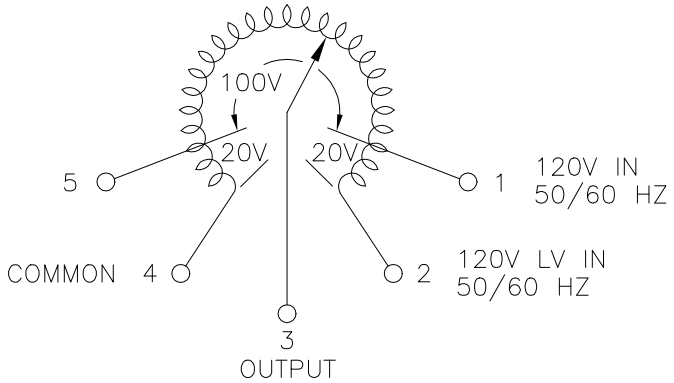

SCHEMATIC  
VIEW FROM BASE END

SPECIFICATIONS													
WIRING	INPUT		VOLTS	OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS				
	VOLTS	HERTZ		CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD			FOR INCREASING VOLTAGE AS VIEWED FROM BASE END				
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA		INPUT	JUMPER	OUTPUT		
SINGLE PHASE	120	50/60	0-120	15	1.80	20	2.40	CW	2-4	——	4-3		
									CCW	2-4	——	2-3	
			0-140	15	2.10	——	——	CW	1-4	——	4-3		
									CCW	5-2	——	2-3	
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			TITLES		SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL 1510								
DECIMALS .001			Holes .002										
ANGLES 1°			DRAFT 1-1/2°										
MATERIAL : —			UNITS IN [mm]		STACO ENERGY PRODUCTS CO. A Components Corporation of Amerstar Company 301 Dallas Boulevard Dayton, Ohio 45403 USA								
ALL DIMENSIONS APPLY AFTER PLATING													
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				DRAWN BY K. TOLLIVER		DATE 11/25/91		FIRST USED ON 1510		DO NOT SCALE DWG.			
				CHECKER		DATE		WEIGHT APPROX. 15.75 LBS		CAGE CODE 83008		DWG. NO.	
				ENGINEER		DATE		SCALE 1 = 1		SHEET 1 OF 1		D 031-3601	

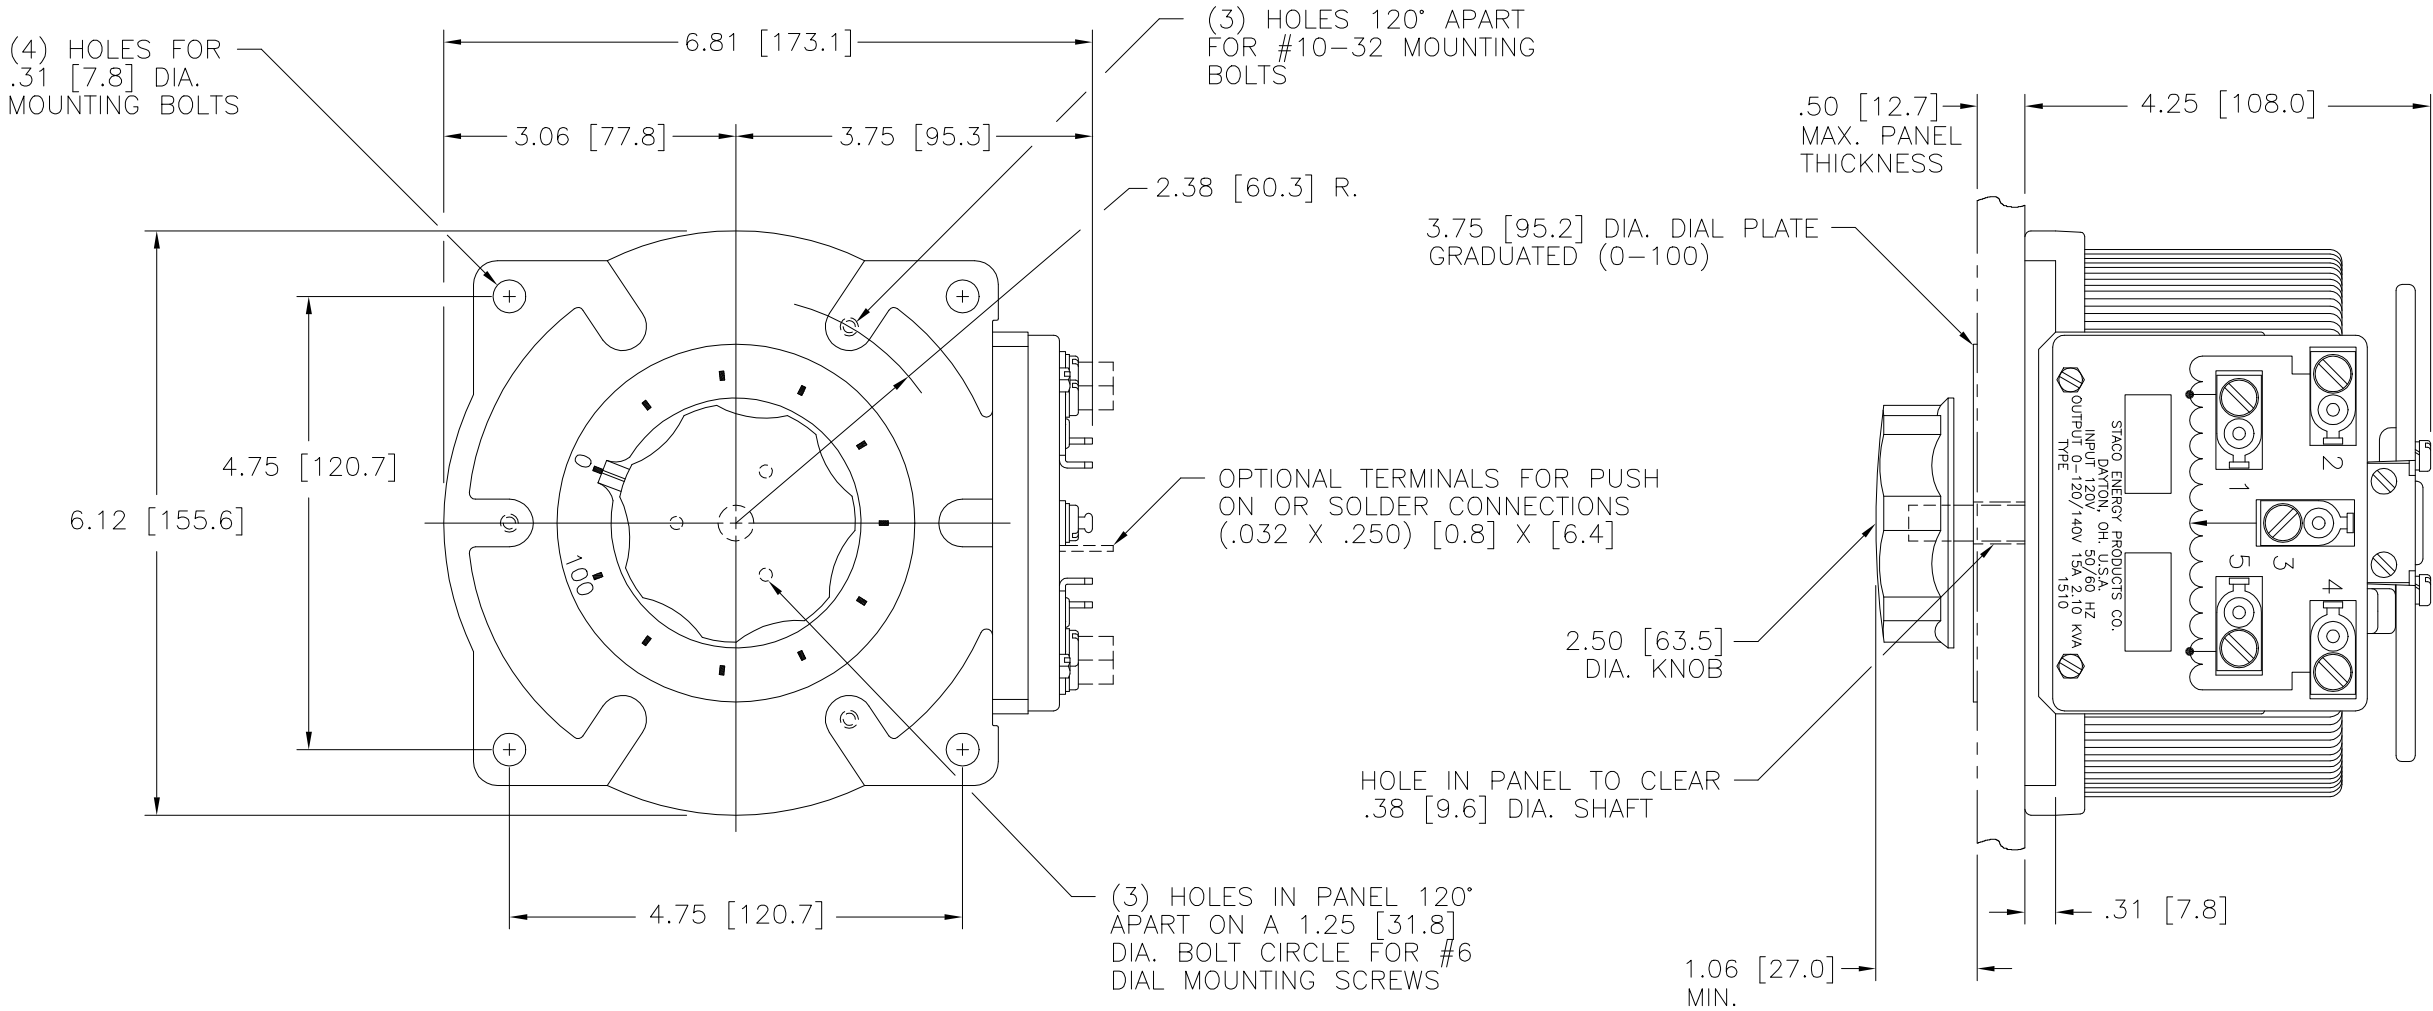

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Staco:

1510