
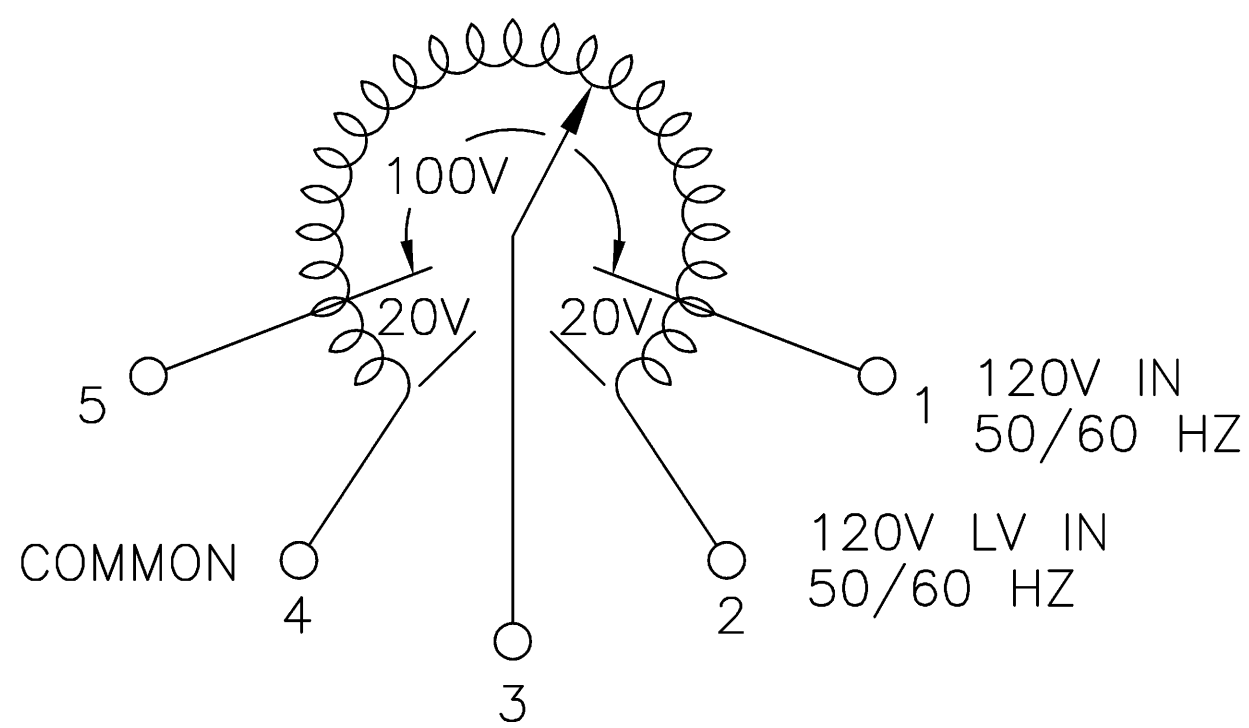


DWG. SIZE D	DWG. NO. 031-4301		
REVISIONS			
SYM.	E.C.N.	DATE	APVD.
G	21675	12/04/91	REVISED & REDRAWN
H	25591	10/25/05	TERM. #1 WAS 240V
J	28522	6/15/16	CORRECTED SCHEMATIC VIEW

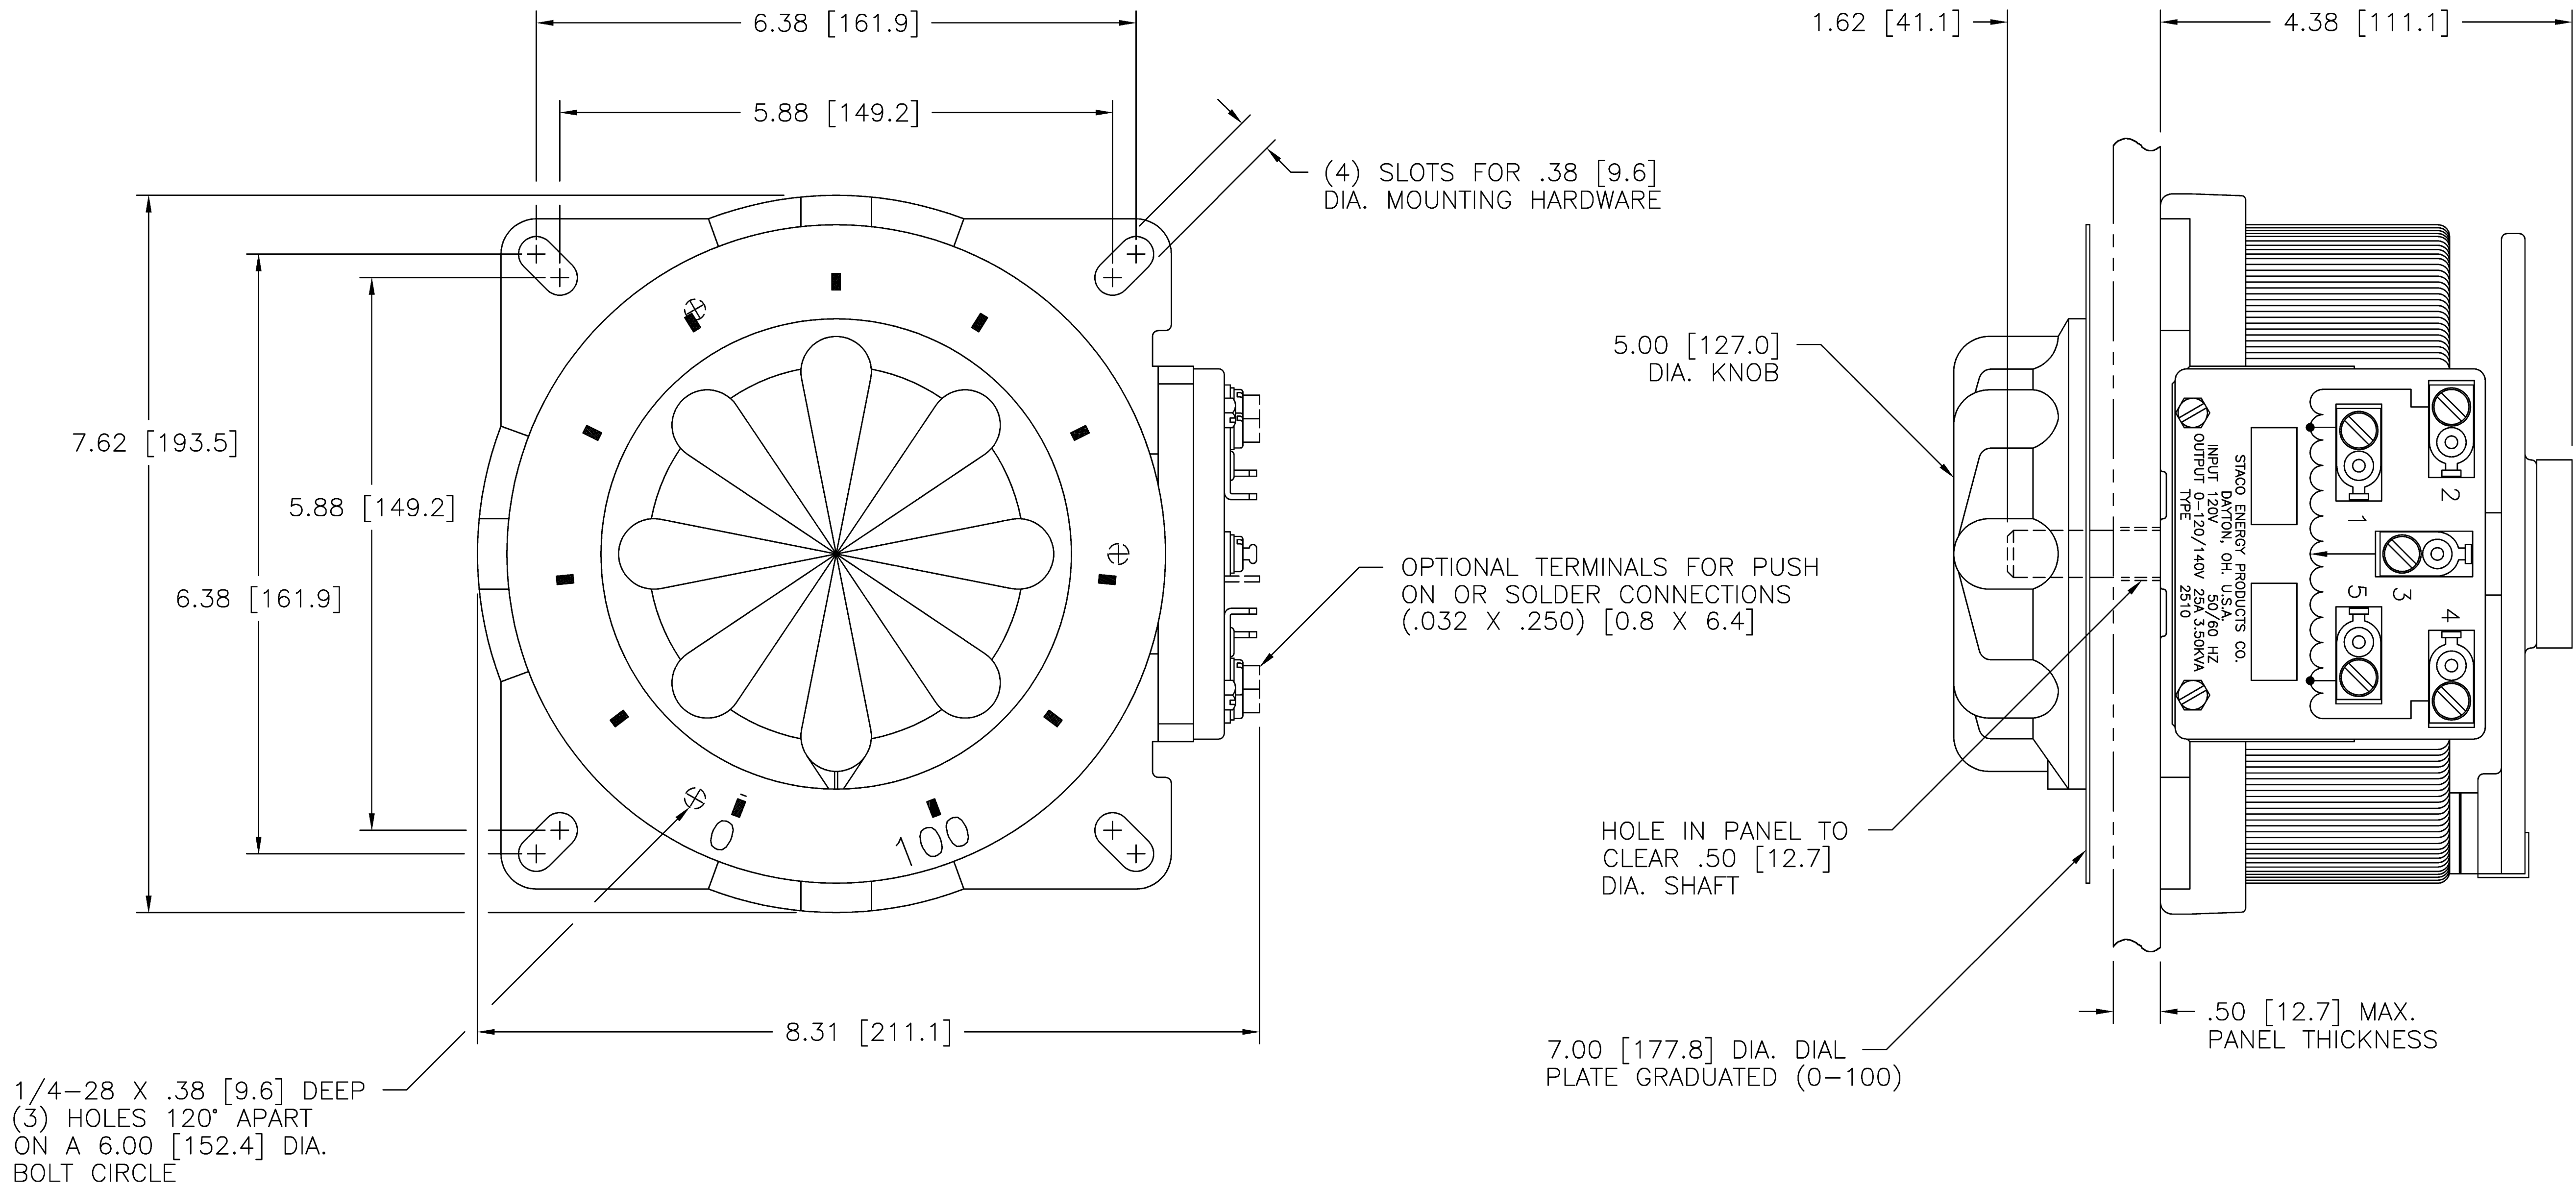

SPECIFICATIONS											
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS			
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END			
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	INPUT	JUMPER	OUTPUT	
SINGLE PHASE	120	50/60	0-120	25	3.00	30	3.6	CW	2-4	—	4-3
								CCW	2-4	—	2-3
			0-140	25	3.50	—	—	CW	1-4	—	4-3
								CCW	2-5	—	2-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			UNITS		TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 2510						
DECIMALS .XX .010 .XXX .005	HOLES .005	ANGLES 1°	DRAFT 1-1/2°	IN [mm]							
MATERIAL :			ALL DIMENSIONS APPLY AFTER PLATING		STACO ENERGY PRODUCTS CO. A Components Corporation of America Company 301 Gaddis Boulevard Dayton, Ohio 45403 USA						
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.					DRAWN BY		DATE	FIRST USED ON	DO NOT SCALE DWG.	DWG. SIZE D 031-4301	
					K. TOLLIVER		11/27/91	2510			
					CHECKER	DATE	WEIGHT APPROX.	CAGE CODE			
					ENGINEER	DATE	21 LBS.	83008			
							SCALE	1 = 1	SHEET 1 OF 1		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Staco:

2510