

Surface Mount Directional Coupler

75Ω 40 to 1200 MHz

TCD-20-4-75X+



Generic photo used for illustration purposes only

CASE STYLE: DB1627

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Features

- wideband, 40-1200 MHz
- excellent flatness, ± 0.5 dB typ. each band
- better performance than MA-COM EMDC-20-2-75
- footprint compatible to EMDC-10-1-75
- aqueous washable

Applications

- CATV

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		40		1200	MHz
Mainline Loss ¹	40 - 500	—	0.5	0.9	dB
	500 - 870	—	0.6	1.0	
	870 - 1200	—	0.6	1.1	
Nominal Coupling	40 - 500	—	21 \pm 0.5	—	dB
	500 - 870	—	20 \pm 0.5	—	
	870 - 1200	—	19.5 \pm 0.5	—	
Coupling Flatness(\pm)	40 - 1200	—	± 0.8	—	dB
Directivity	40 - 500	15	20	—	dB
	500 - 870	16	23	—	
	870 - 1200	14	20	—	
VSWR	40 - 1200	—	1.15	—	:1
Input Power	40 - 1200	—	—	1.0	W

1. Mainline loss includes theoretical power loss at coupled port.

Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C*
Storage Temperature	-55°C to 100°C


Permanent damage may occur if any of these limits are exceeded.

* Case temperature is defined as temperature on ground leads.


Pin Connections

Function	Pin Number
INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

Product Marking



Electrical Schematic

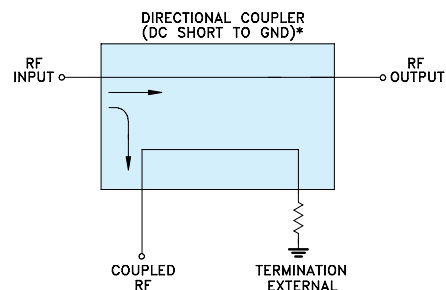


* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
ED-8563/1
TCD-20-4-75X+
WZ/TD/CP/AM
191010
Page 1 of 2


Outline Drawing

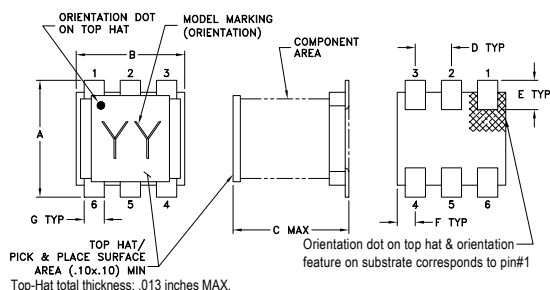


Outline Dimensions (inch)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

PCB Land Pattern



Demo Board MCL P/N: TB-72 Suggested PCB Layout (PL-010)

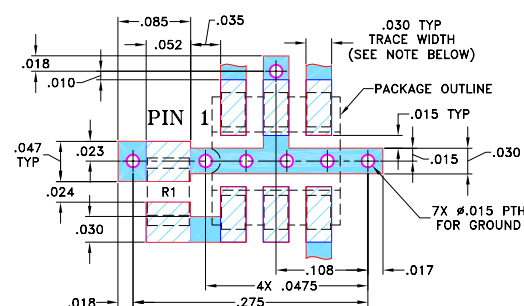

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.




2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	In	Return Loss (dB) Out	Cpl
40.00	0.58	21.64	17.52	23.40	24.77	23.38
150.00	0.51	21.32	22.55	26.56	29.03	26.72
300.00	0.52	21.04	27.40	25.81	26.94	27.36
500.00	0.55	20.52	34.93	23.79	23.55	25.86
650.00	0.55	20.11	25.14	24.15	23.07	25.34
850.00	0.59	19.53	23.06	26.52	24.05	24.00
1000.00	0.65	19.12	23.38	29.12	26.11	23.57
1050.00	0.68	18.96	21.95	30.51	26.75	22.99
1100.00	0.69	18.81	21.82	31.20	26.49	23.19
1200.00	0.73	18.51	20.42	32.12	27.62	23.06

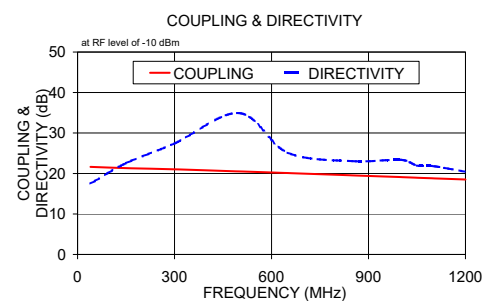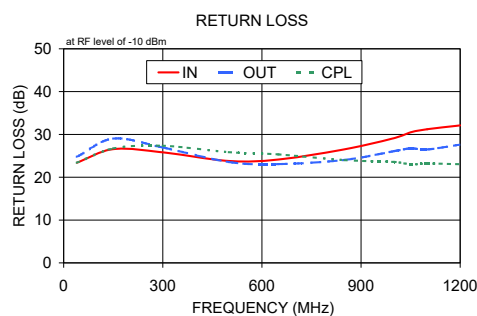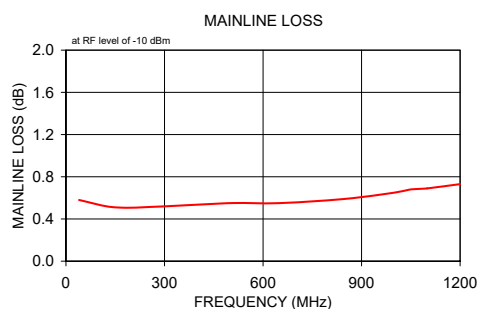

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TCD-20-4-75X+](#)