RF Transformer

50Ω

2 to 500 MHz


Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA
Permanent damage may occur if any	of these limits are exceeded.


Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2
NOT USED	5

Outline Drawing

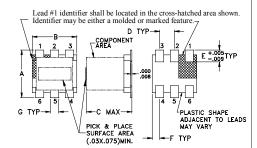

PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch)

Α	В	С	D	Е	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	Н	J	K		wt
G .028	H .065	J .190	K .030		wt grams

Config. A



Features

- excellent amplitude unbalance. 0.1 dB typ.
- excellent phase unbalance, 2 deg. typ. in 1 dB bandwidth
- plastic base with solder plated leads
- aqueous washable

Applications

• impedance matching

TCM3-1T+



CASE STYLE: DB714 PRICE: \$2.09 ea. QTY (20) \$1.09 ea. QTY (100)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Transformer Electrical Specifications

(Se	Ω RATIO econdary/Primary)	FREQUENCY (MHz)	INSERTION LOSS* 2 dB 1 dB MHz MHz
	3	2-500	2-500 5-300

^{*} Insertion Loss is referenced to mid-band loss, 0.5 dB typ

Typical Performance Data

	QUENCY MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
	1.00	0.99	16.34	
	5.00	0.62	22.80	
1	0.00	0.55	25.33	
5	0.00	0.54	26.93	
7	0.00	0.58	26.24	
9	0.00	0.58	25.23	
10	0.00	0.59	25.02	
20	0.00	0.68	22.28	
40	0.00	0.86	18.81	
50	0.00	0.90	17.21	

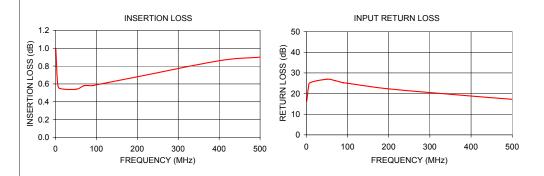

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Mini-Circuits}}{\text{TCM3-1T+}}:$