

 50Ω 3 to 800 MHz

Features

- wide bandwidth. 3 to 800 MHz
- good return loss
- plastic base with solder plated leads
- aqueous washable

Applications

- CATV
- VHF/UHF
- balanced amplifier
- impedance matching

TCM4-1WX+



Generic photo used for illustration purposes only

CASE STYLE: DB1627

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

	Available Tape and Reel at no extra cost
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit
Impedance Ratio (Secondary/Primary)			4		Ohm
Frequency Range		3		800	MHz
	3 - 800		3		
Insertion Loss*	4 - 400		2		dB
	10 - 100		1		

 $^{^{\}star}$ Insertion Loss is referenced to mid-band loss, 0.8 dB typ.

Maximum Ratings

	Parameter	Ratings
Operatin	g Temperature	-20°C to 85°C
Storage '	Temperature	-55°C to 100°C
RF Powe	er	0.25W
DC Curre	ent	30mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2
NOT USED	5


Product Marking



Config. A



Outline Drawing

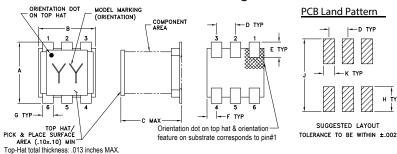


Outline Dimensions (inch)

F	Е	D	С	В	Α
.025	.040	.050	.160	.150	.160
0.64	1.02	1.27	4.06	3.81	4.06
wt		K	J	н	G
grams		.030	.190	.065	.028
0.15		0.76	4.83	1.65	0.71

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
3.00	1.16	16.43	
5.00	1.02	18.47	
7.00	0.95	19.69	
10.00	0.93	20.74	
46.00	0.94	22.08	
100.00	1.01	21.46	
220.00	1.12	19.83	
400.00	1.28	16.64	
640.00	1.70	11.87	
800.00	2.29	9.01	



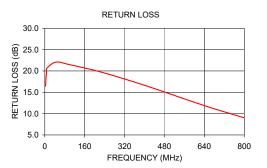

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- A. Perioritance and quanty attributes and continuous and continuous and expressly stated in it has specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Mini-Circuits}}{\text{TCM4-1WX+}}$