

## N-channel 800 V, 2.1 $\Omega$ typ., 3 A MDmesh™ K5 Power MOSFET in a PowerFLAT™ 5x6 VHV package

Datasheet - preliminary data


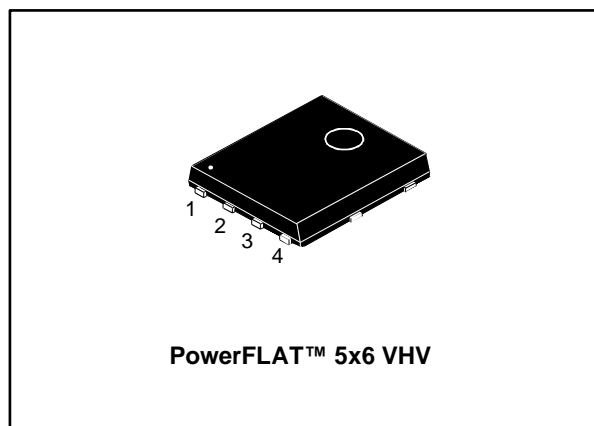


Figure 1: Internal schematic diagram

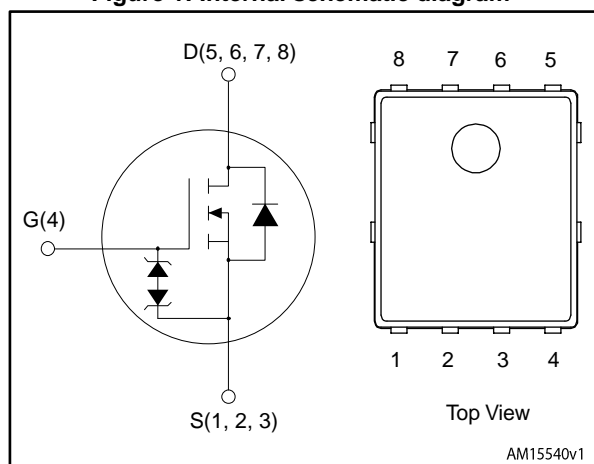

### Features

| Order code | V <sub>DS</sub> | R <sub>DS(on)</sub> max. | I <sub>D</sub> |
|------------|-----------------|--------------------------|----------------|
| STL4LN80K5 | 800 V           | 2.6 $\Omega$             | 3 A            |

- Industry's lowest R<sub>DS(on)</sub>\* area
- Industry's best FoM (figure of merit)
- Ultra low-gate charge
- 100% avalanche tested
- Zener-protected

### Applications

- Switching applications

### Description

This very high voltage N-channel Power MOSFET is designed using MDmesh™ K5 technology based on an innovative proprietary vertical structure. The result is a dramatic reduction in on-resistance and ultra-low gate charge for applications requiring superior power density and high efficiency.

Table 1: Device summary

| Order code | Marking | Package            | Packing       |
|------------|---------|--------------------|---------------|
| STL4LN80K5 | 4LN80K5 | PowerFLAT™ 5x6 VHV | Tape and reel |

---

## Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Electrical ratings .....</b>                  | <b>3</b>  |
| <b>2</b> | <b>Electrical characteristics .....</b>          | <b>4</b>  |
| <b>3</b> | <b>Test circuits .....</b>                       | <b>6</b>  |
| <b>4</b> | <b>Package information .....</b>                 | <b>7</b>  |
|          | 4.1 PowerFLAT™ 5x6 VHV package information ..... | 8         |
|          | 4.2 PowerFLAT™ 5x6 packing information .....     | 11        |
| <b>5</b> | <b>Revision history .....</b>                    | <b>13</b> |

# 1 Electrical ratings

Table 2: Absolute maximum ratings

| Symbol         | Parameter   | Value       | Unit               |
|----------------|---|-------------|--------------------|
| $V_{GS}$       | Gate-source voltage   | $\pm 30$    | V                  |
| $I_D$          | Drain current (continuous) at $T_C = 25\text{ }^{\circ}\text{C}$  | 3           | A                  |
| $I_D$          | Drain current (continuous) at $T_C = 100\text{ }^{\circ}\text{C}$ | 1.9         | A                  |
| $I_{DM}^{(1)}$ | Drain current (pulsed)  | 12          | A                  |
| $P_{TOT}$      | Total dissipation at $T_C = 25\text{ }^{\circ}\text{C}$           | 38          | W                  |
| $dv/dt^{(2)}$  | Peak diode recovery voltage slope                                 | 15          | V/ns               |
| $dv/dt^{(3)}$  | MOSFET $dv/dt$ ruggedness   | 50          |                    |
| $T_j$          | Operating junction temperature                                    | - 55 to 150 | $^{\circ}\text{C}$ |
| $T_{stg}$      | Storage temperature   |             |                    |

**Notes:**<sup>(1)</sup> Pulse width limited by safe operating area<sup>(2)</sup>  $I_{SD} \leq 3\text{ A}$ ,  $dv/dt \leq 100\text{ A}/\mu\text{s}$ ;  $V_{DS}\text{ peak} < V_{(BR)DSS}$ <sup>(3)</sup>  $V_{DS} \leq 640\text{ V}$ 

Table 3: Thermal data

| Symbol              | Parameter                        | Value | Unit                        |
|---------------------|----------------------------------|-------|-----------------------------|
| $R_{thj-case}$      | Thermal resistance junction-case | 3.3   | $^{\circ}\text{C}/\text{W}$ |
| $R_{thj-pcb}^{(1)}$ | Thermal resistance junction-pcb  | 59    | $^{\circ}\text{C}/\text{W}$ |

**Notes:**<sup>(1)</sup> When mounted on FR-4 board of 1 inch<sup>2</sup>, 2 oz Cu

Table 4: Avalanche characteristics

| Symbol   | Parameter  | Value | Unit |
|----------|--|-------|------|
| $I_{AR}$ | Avalanche current, repetitive or not repetitive (pulse width limited by $T_{jmax}$ )                                   | TBD   | A    |
| $E_{AS}$ | Single pulse avalanche energy (starting $T_j = 25\text{ }^{\circ}\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50\text{ V}$ ) | TBD   | mJ   |

## 2 Electrical characteristics

$T_C = 25\text{ °C}$  unless otherwise specified

**Table 5: On/off-state**

| Symbol        | Parameter                         | Test conditions  | Min. | Typ. | Max.     | Unit          |
|---------------|-----------------------------------|--|------|------|----------|---------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage    | $V_{GS} = 0\text{ V}$ , $I_D = 1\text{ mA}$                              | 800  |      |          | V             |
| $I_{DSS}$     | Zero gate voltage drain current   | $V_{GS} = 0\text{ V}$ , $V_{DS} = 800\text{ V}$                          |      |      | 1        | $\mu\text{A}$ |
|               |                                   | $V_{GS} = 0\text{ V}$ , $V_{DS} = 800\text{ V}$<br>$T_C = 125\text{ °C}$ |      |      | 50       | $\mu\text{A}$ |
| $I_{GSS}$     | Gate body leakage current         | $V_{DS} = 0\text{ V}$ , $V_{GS} = \pm 20\text{ V}$                       |      |      | $\pm 10$ | $\mu\text{A}$ |
| $V_{GS(th)}$  | Gate threshold voltage            | $V_{DS} = V_{GS}$ , $I_D = 100\text{ }\mu\text{A}$                       | 3    | 4    | 5        | V             |
| $R_{DS(on)}$  | Static drain-source on-resistance | $V_{GS} = 10\text{ V}$ , $I_D = 1.2\text{ A}$                            |      | 2.1  | 2.6      | $\Omega$      |

**Table 6: Dynamic**

| Symbol              | Parameter                     | Test conditions  | Min. | Typ. | Max. | Unit     |
|---------------------|-------------------------------|--|------|------|------|----------|
| $C_{iss}$           | Input capacitance             | $V_{DS} = 100\text{ V}$ , $f = 1\text{ MHz}$ , $V_{GS} = 0\text{ V}$   | -    | 110  | -    | pF       |
| $C_{oss}$           | Output capacitance            |  | -    | 9.5  | -    | pF       |
| $C_{rss}$           | Reverse transfer capacitance  |  | -    | 0.4  | -    | pF       |
| $C_{oss(eq)}^{(1)}$ | Equivalent output capacitance | $V_{DS} = 0\text{ to }640\text{ V}$ , $V_{GS} = 0\text{ V}$  | -    | TBD  | -    | pF       |
| $R_g$               | Intrinsic gate resistance     | $f = 1\text{ MHz}$ , $I_D = 0\text{ A}$  | -    | 18   | -    | $\Omega$ |
| $Q_g$               | Total gate charge             | $V_{DD} = 640\text{ V}$ , $I_D = 2\text{ A}$<br>$V_{GS} = 10\text{ V}$ ,<br>see <a href="#">Figure 3: "Gate charge test circuit"</a> | -    | 4    | -    | nC       |
| $Q_{gs}$            | Gate-source charge            |  | -    | TBD  | -    | nC       |
| $Q_{gd}$            | Gate-drain charge             |  | -    | TBD  | -    | nC       |

**Notes:**

<sup>(1)</sup> $C_{oss\ eq}$  is defined as a constant equivalent capacitance giving the same charging time as  $C_{oss}$  when  $V_{DS}$  increases from 0 to 80%  $V_{DSS}$

**Table 7: Switching times**

| Symbol       | Parameter           | Test conditions  | Min. | Typ. | Max. | Unit |
|--------------|---------------------|--|------|------|------|------|
| $t_{d(on)}$  | Turn-on delay time  | $V_{DD} = 400\text{ V}$ , $I_D = 1.6\text{ A}$ , $R_G = 4.7\text{ }\Omega$<br>$V_{GS} = 10\text{ V}$<br>(See <a href="#">Figure 2: "Switching times test circuit for resistive load"</a> and <a href="#">Figure 7: "Switching time waveform"</a> ) | -    | TBD  | -    | ns   |
| $t_r$        | Rise time           |  | -    | TBD  | -    | ns   |
| $t_{d(off)}$ | Turn-off delay time |  | -    | TBD  | -    | ns   |
| $t_f$        | Fall time           |  | -    | TBD  | -    | ns   |

Table 8: Source-drain diode

| Symbol          | Parameter                     | Test conditions  | Min. | Typ. | Max. | Unit          |
|-----------------|-------------------------------|--|------|------|------|---------------|
| $I_{SD}$        | Source-drain current          |  | -    |      | 3    | A             |
| $I_{SDM}^{(1)}$ | Source-drain current (pulsed) |  | -    |      | 12   | A             |
| $V_{SD}^{(2)}$  | Forward on voltage            | $I_{SD} = 3\text{ A}$ , $V_{GS} = 0\text{ V}$  | -    |      | 1.6  | V             |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 3\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{DD} = 60\text{ V}$ , (see <a href="#">Figure 4: "Test circuit for inductive load switching and diode recovery times"</a> )                                   | -    | TBD  |      | ns            |
| $Q_{rr}$        | Reverse recovery charge       |  | -    | TBD  |      | $\mu\text{C}$ |
| $I_{RRM}$       | Reverse recovery current      |  | -    | TBD  |      | A             |
| $t_{rr}$        | Reverse recovery time         | $I_{SD} = 3\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ ,<br>$V_{DD} = 60\text{ V}$ , $T_j = 150\text{ }^\circ\text{C}$<br>( <a href="#">Figure 4: "Test circuit for inductive load switching and diode recovery times"</a> ) | -    | TBD  |      | ns            |
| $Q_{rr}$        | Reverse recovery charge       |  | -    | TBD  |      | $\mu\text{C}$ |
| $I_{RRM}$       | Reverse recovery current      |  | -    | TBD  |      | A             |

**Notes:**<sup>(1)</sup>Pulse width limited by safe operating area<sup>(2)</sup>Pulsed: pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5%


Table 9: Gate source-Zener diode

| Symbol        | Parameter                     | Test condition                                  | Min. | Typ. | Max. | Unit. |
|---------------|-------------------------------|---|------|------|------|-------|
| $V_{(BR)GS0}$ | Gate-source breakdown voltage | $I_{GS} = \pm 1\text{ mA}$ , $I_D = 0\text{ A}$ | 30   | -    | -    | V     |

The built-in back-to-back Zener diodes have specifically been designed to enhance the device's ESD capability. In this respect the Zener voltage is appropriate to achieve an efficient and cost-effective intervention to protect the device's integrity. These integrated Zener diodes thus avoid the usage of external components.


### 3 Test circuits

**Figure 2: Switching times test circuit for resistive load**

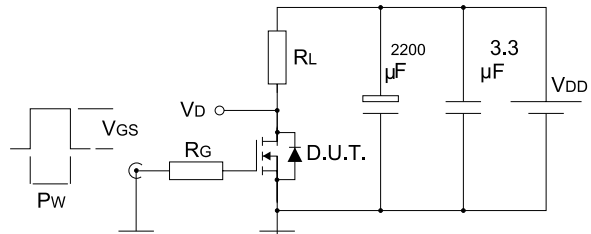


AM01468v1

**Figure 3: Gate charge test circuit**

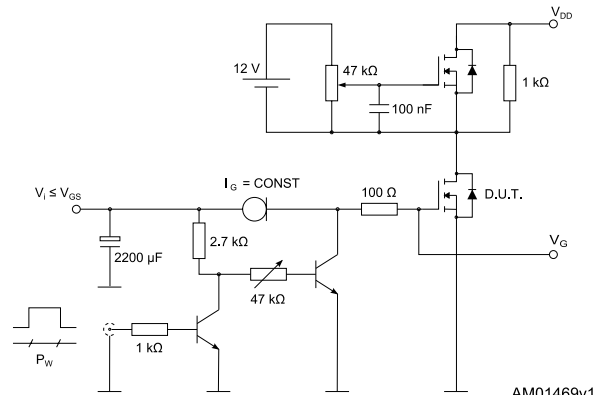


AM01469v1

**Figure 4: Test circuit for inductive load switching and diode recovery times**

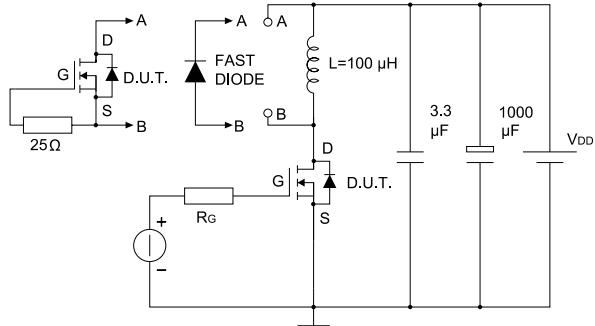


AM01470v1

**Figure 5: Unclamped inductive load test circuit**

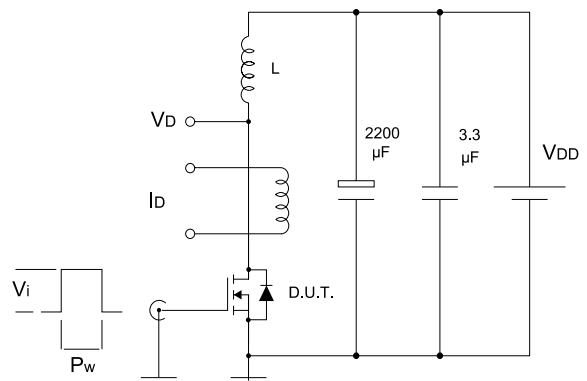


AM01471v1

**Figure 6: Unclamped inductive waveform**

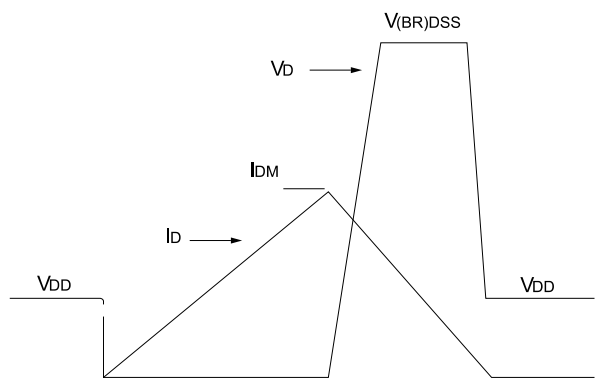

AM01472v1

**Figure 7: Switching time waveform**

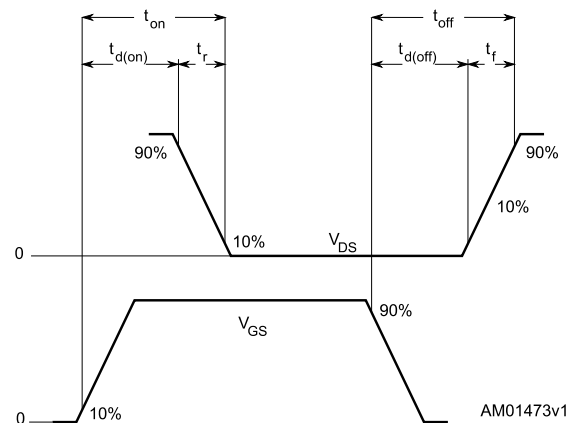

AM01473v1

## 4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: **[www.st.com](http://www.st.com)**. ECOPACK<sup>®</sup> is an ST trademark.

## 4.1 PowerFLAT™ 5x6 VHV package information

Figure 8: PowerFLAT™ 5x6 VHV Package outline


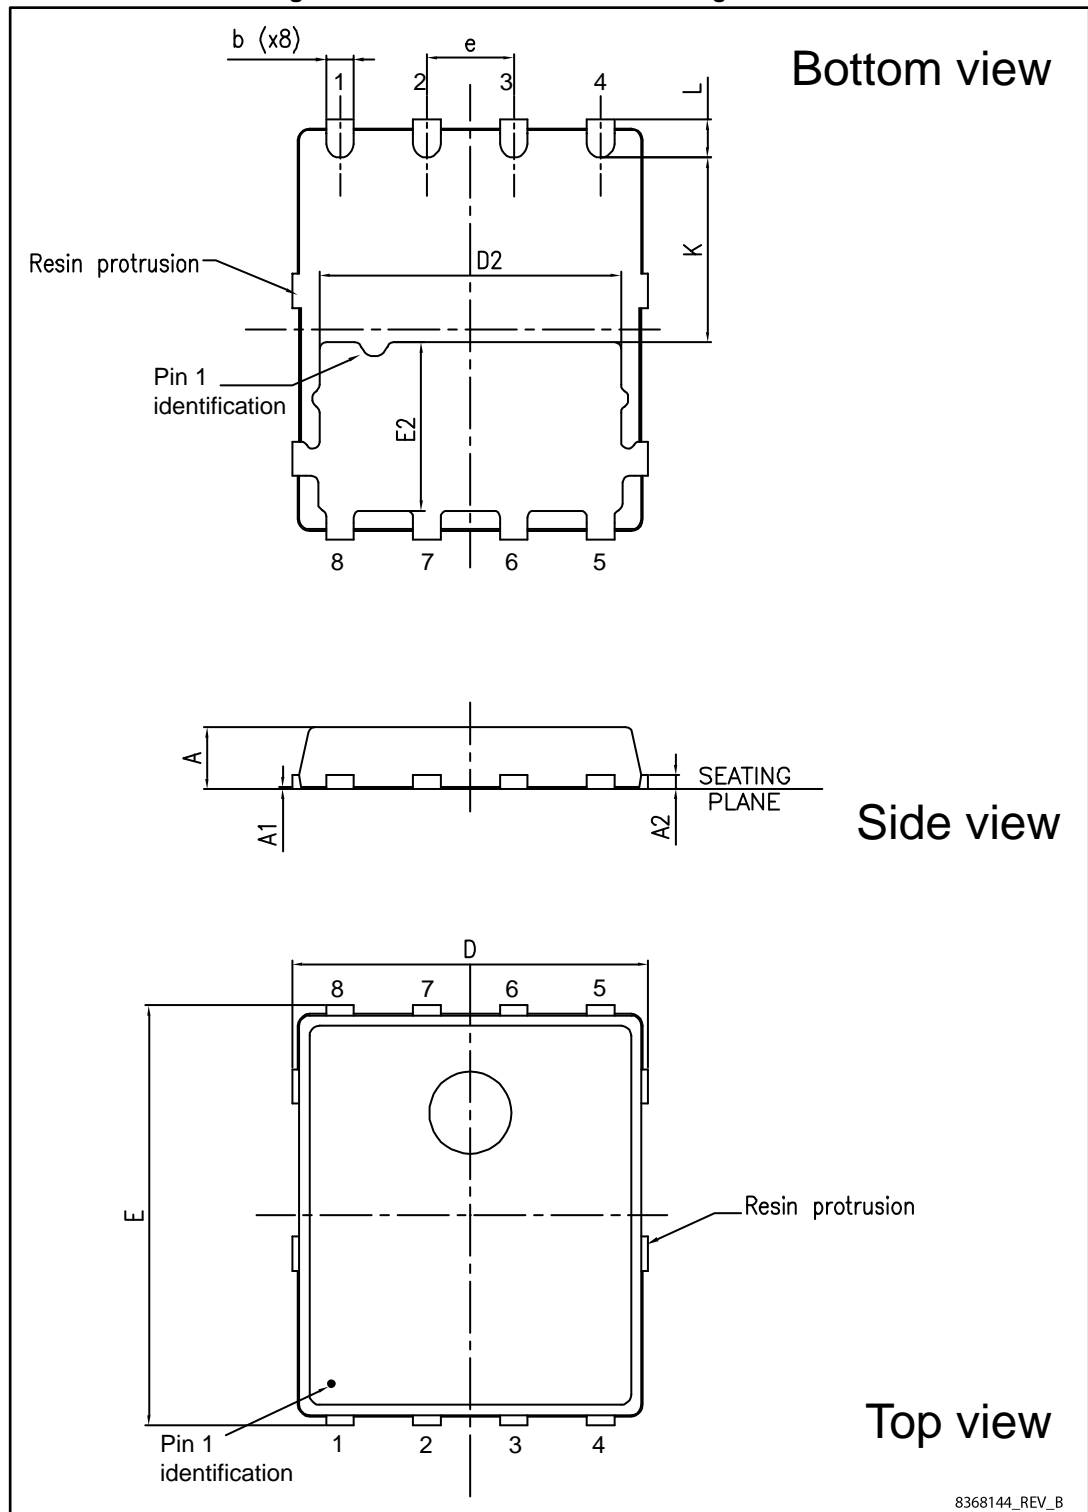




Table 10: PowerFLAT™ 5x6 VHV package mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 0.80 |      | 1.00 |
| A1   | 0.02 |      | 0.05 |
| A2   |      | 0.25 |      |
| b    | 0.30 |      | 0.50 |
| D    | 5.00 | 5.20 | 5.40 |
| E    | 5.95 | 6.15 | 6.35 |
| D2   | 4.30 | 4.40 | 4.50 |
| E2   | 2.40 | 2.50 | 2.60 |
| e    |      | 1.27 |      |
| L    | 0.50 | 0.55 | 0.60 |
| K    | 2.60 | 2.70 | 2.80 |

Figure 9: PowerFLAT™ 5x6 VHV recommended footprint (dimensions are in mm)

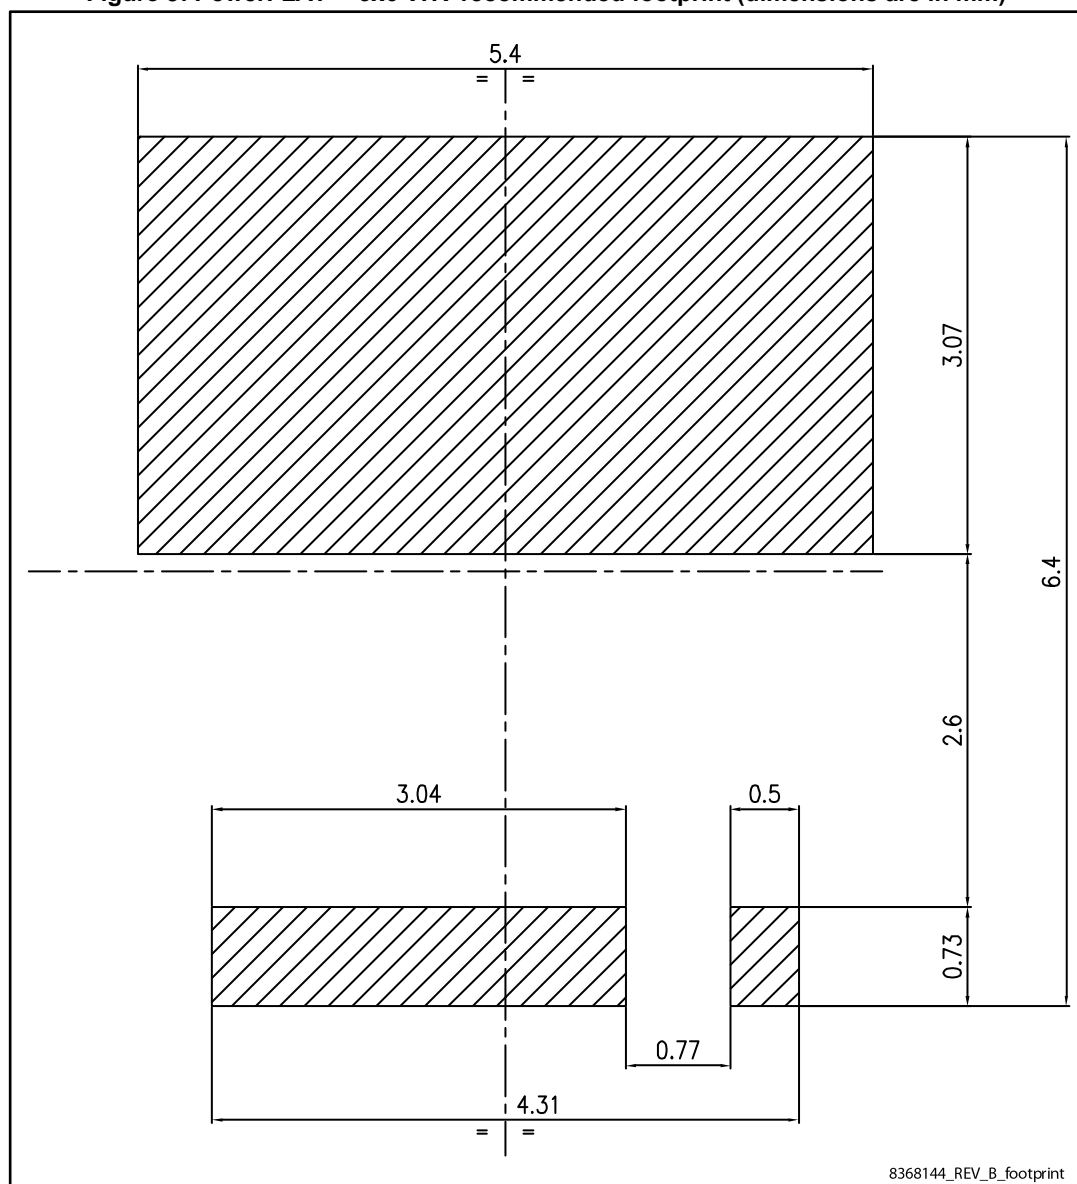

## 4.2 PowerFLAT™ 5x6 packing information

Figure 10: PowerFLAT™ 5x6 tape (dimensions are in mm)

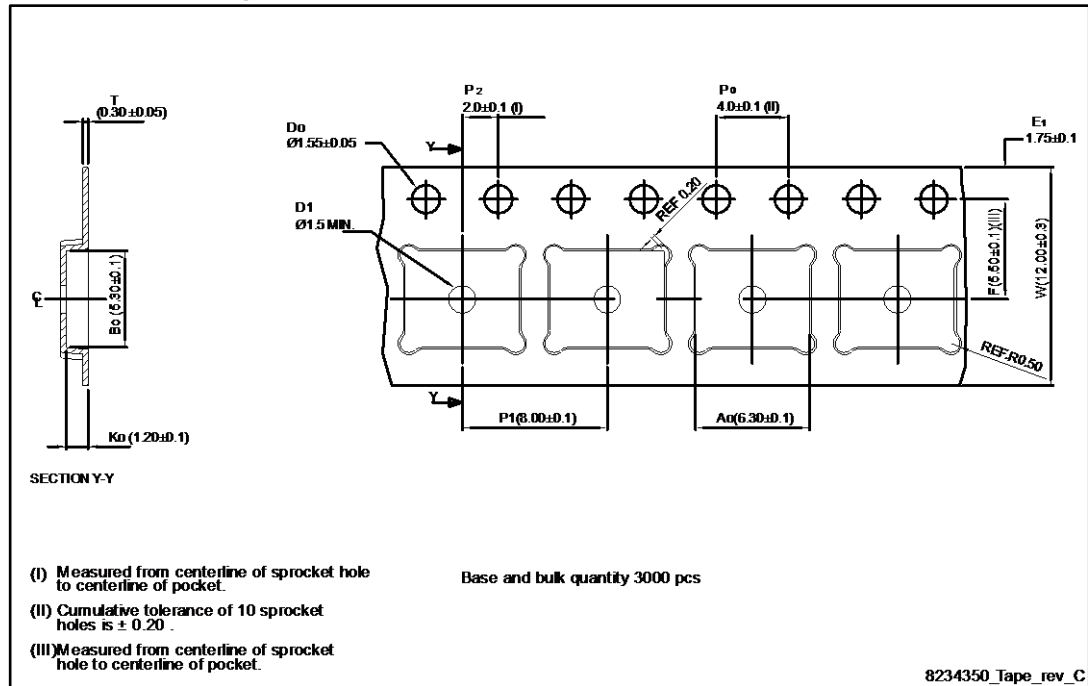


Figure 11: PowerFLAT™ 5x6 package orientation in carrier tape


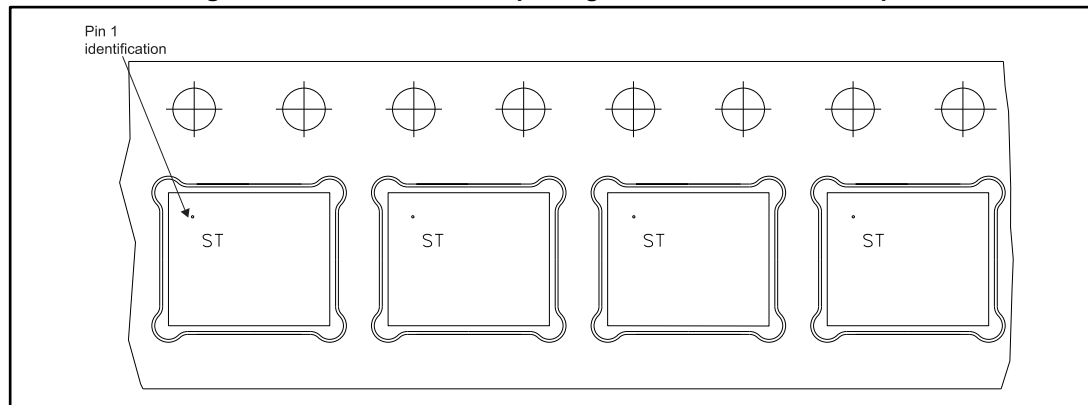


Figure 12: PowerFLAT™ 5x6 reel

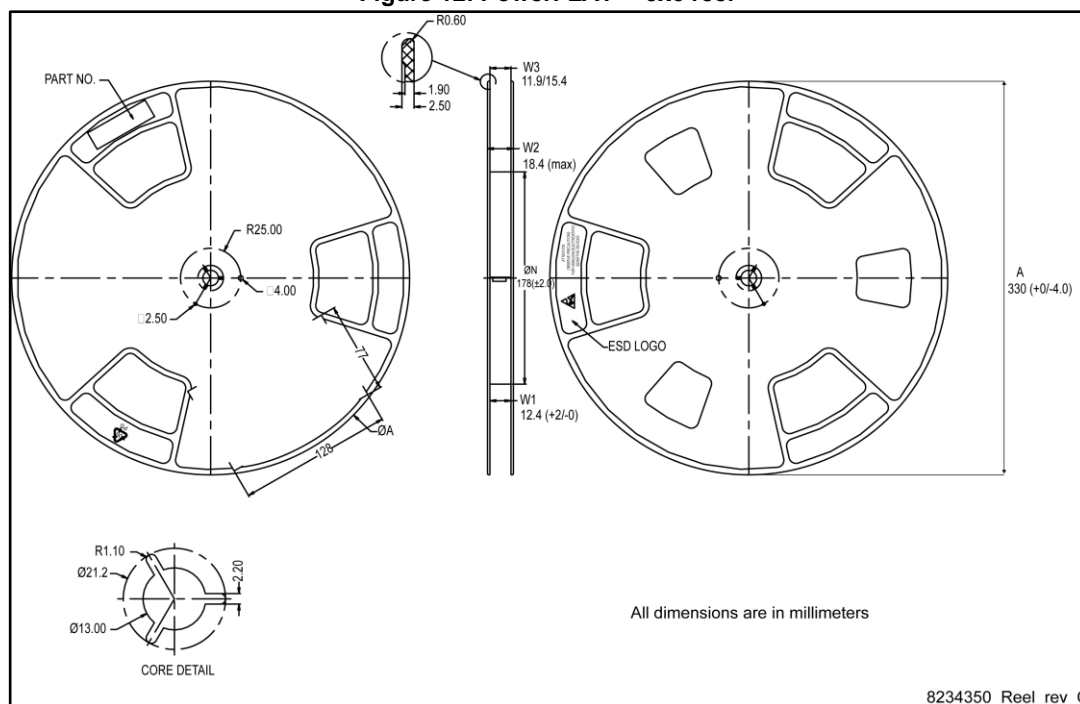

## 5 Revision history

Table 11: Document revision history

| Date        | Revision | Changes        |
|-------------|----------|----------------|
| 29-May-2015 | 1        | First release. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STL4LN80K5](#)