


## Very high power density board - 65W USB Type-C™ Power Delivery

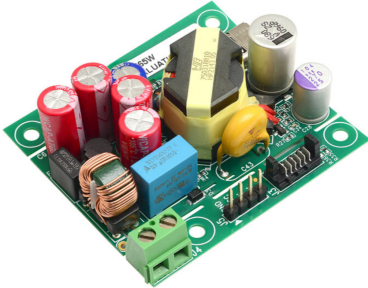

Product status link

[EVLONE65W](#)

### Features

- Universal input mains range: 90 Vac to 265 Vac - Frequency 47 ÷ 63 Hz
- Maximum output power: 65 W
- Dimensions: 58x32x20 mm, (L x W x H)
- Power density: 30 W/in<sup>3</sup>
- Efficiency: > 93 % @ full load
- Constant current output: 3.75 A max
- Output voltage range: 3.3 ÷ 21 Vdc
- PD output:
  - Five fixed PDOs: 5 V@3.75 A, 9 V@3.75 A, 12 V@3.75 A, 15 V@3.75 A, 20 V@3.25 A
  - Two APDOs (PPS): 3.3 V÷16 V@3.75 A, 3.3 V÷21 V@3.25 A
- PPS mode: 20 mV step for CV, 50 mA step for CC
- Certified USB power delivery 3.1.1.2 power brick
- Feedback loops: constant current and constant voltage
- Protections: brown out, over current protection, over temperature protection, over voltage protection, under voltage protection

### Description

The **EVLONE65W** is a high power density USB-PD board supporting Programmable Power Supply (PPS). The design supports wide range input voltage and can deliver five fixed PDOs and two APDOs.


This board is based on ST-ONE, the world's first digital controller embedding an Arm® Cortex® M0+ core, an offline programmable controller with synchronous rectification, and USB-PD PHY in a single package.

Such a system is specifically designed to control ZVS non-complementary active clamp flyback converters to create high power density chargers and adapters with USB-PD interface. The device includes an active clamp flyback controller and its HV startup on the primary side, a microcontroller and all the peripherals required to control the conversion and the USB-PD communication on the secondary side. The two sides are connected through an embedded galvanically isolated dual communication channel.

High switching operation in companion with a MasterGaN power stage allows use of small size magnetic components while reaching a very high efficiency.

# 1 Schematic diagram and bill of material

Figure 1. Schematic diagram

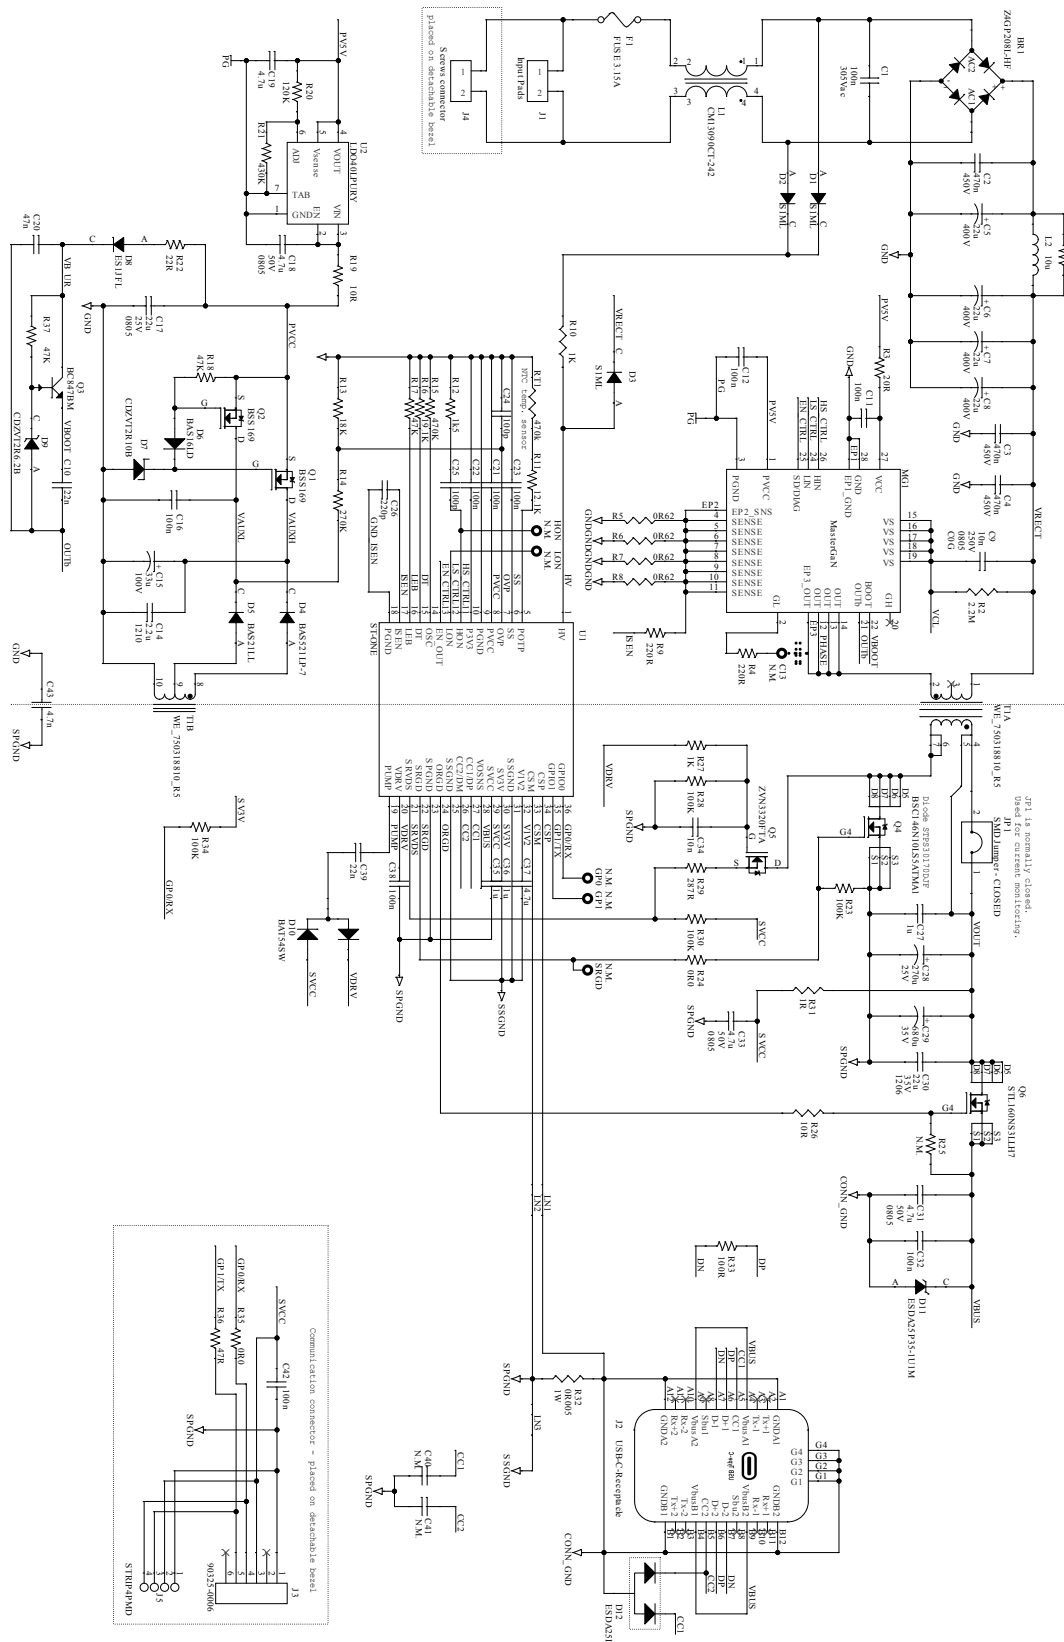

| Reference                                       | Part Number              | Value | Description                        | Package                       | Manufacturer |
|-------------------------------------------------|--------------------------|-------|------------------------------------|-------------------------------|--------------|
| BR1                                             | Z4GP208L-HF              |       | RECT BRIDGE GP<br>800V 2A Z4       | Z4                            | Comchip      |
| C1                                              | B32921C3104M             | 100nF | Radial polypropylene<br>film cap.  | Plastic<br>radial             | TDK          |
| C2, C3, C4                                      | CGA8N4X7T2W474K230K<br>A | 470nF | SMD multilayer<br>ceramic cap.     | 1812                          | TDK          |
| C5, C6, C7,<br>C8                               | 860021374027             | 22μF  | Aluminum electrolytic<br>capacitor | D8, h16,<br>pitch 3.5<br>mm   | Würth        |
| C9                                              | C2012C0G2E103J125AA      | 10nF  | SMD multilayer<br>ceramic cap.     | 0805                          | TDK          |
| C10, C39                                        | 885012205052             | 22nF  | SMD multilayer<br>ceramic cap.     | 0402                          | Würth        |
| C11, C12,<br>C21, C22,<br>C23, C32,<br>C38, C42 | 885012205085             | 100nF | SMD multilayer<br>ceramic cap.     | 0402                          | Würth        |
| C13                                             | DNM                      | N.M.  | Not mounted                        |                               |              |
| C14                                             | 885012209071             | 2.2μF | SMD multilayer<br>ceramic cap.     | 1210                          | Würth        |
| C15                                             | ECA2AAM330X              | 33μF  | Aluminum electrolytic<br>capacitor | D8, h11.5,<br>pitch 3.5<br>mm | Panasonic    |
| C16                                             | 885012206120             | 100nF | SMD multilayer<br>ceramic cap.     | 0603                          | Würth        |
| C17                                             | CL21A226MAQNNNE          | 22μF  | SMD multilayer<br>ceramic cap.     | 0805                          | Samsung      |
| C18, C31,<br>C33                                | C2012X7R1H475K           | 4.7μF | SMD multilayer<br>ceramic cap.     | 0805                          | TDK          |
| C19                                             | 885012107018             | 4.7μF | SMD multilayer<br>ceramic cap.     | 0805                          | Würth        |
| C20                                             | C1608X7R1H473K080AA      | 47nF  | SMD multilayer<br>ceramic cap.     | 0603                          | TDK          |
| C24, C25                                        | 885012205055             | 100pF | SMD multilayer<br>ceramic cap.     | 0402                          | Würth        |
| C26                                             | 885012005063             | 220pF | SMD multilayer<br>ceramic cap.     | 0402                          | Würth        |
| C27                                             | UMK107AB7105KA-T         | 1μF   | SMD multilayer<br>ceramic cap.     | 0603                          | Taiyo Yuden  |
| C28                                             | 25SEK270M                | 270μF | Aluminum polymer<br>capacitor      | Radial                        | Panasonic    |
| C29                                             | EEH-ZS1V681UP            | 680μF | Aluminum polymer<br>capacitor      | 10 mm SMD                     | Panasonic    |
| C30                                             | C3216X5R1V226M160AC      | 22μF  | SMD multilayer<br>ceramic cap.     | 1206                          | TDK          |
| C34                                             | 885012205050             | 10nF  | SMD multilayer<br>ceramic cap.     | 0402                          | Würth        |
| C35                                             | C1005X5R1V105K050BC      | 1μF   | SMD multilayer<br>ceramic cap.     | 0402                          | TDK          |
| C36                                             | 885012105012             | 1μF   | SMD multilayer<br>ceramic cap.     | 0402                          | Würth        |

| Reference                | Part Number       | Value                      | Description                                     | Package              | Manufacturer         |
|--------------------------|-------------------|----------------------------|-------------------------------------------------|----------------------|----------------------|
| C37                      | 885012105008      | 4.7µF                      | SMD multilayer ceramic cap.                     | 0402                 | Würth                |
| C40, C41                 |                   | N.M.                       | SMD multilayer ceramic cap.                     | 0402                 |                      |
| C43                      | VY1472M51Y5VQ63V0 | 4.7nF                      | CAP CER 4700PF 500 VAC Y5 V RADIAL              |                      | Vishay               |
| D1, D2, D3               | S1ML R3G          |                            | SMD diode                                       | DO-219AB             | Taiwan Semiconductor |
| D4                       | BAS521LP-7        |                            | High-voltage switching diode                    | SOD-882              | Nexperia             |
| D5                       | BAS21LLYL         |                            | High-voltage switching diode                    | SOD-882              | Nexperia             |
| D6                       | BAS16LD           |                            | SMD fast switching rectifier                    | SOD-882              | NXP                  |
| D7                       | CDZVT2R10B        |                            | SMD Zener diode                                 | SOD-923              | ROHM                 |
| D8                       | ES1JFL            |                            | SMD diode                                       | SOD-123F             | On Semiconductor     |
| D9                       | CDZVT2R6.2B       |                            | SMD Zener diode                                 | SOD-923              | ROHM                 |
| D10                      | BAT54SWFILM       |                            | SMD Schottky rectifiers array                   | SOT-323              | STMicroelectronics   |
| D11                      | ESDA25P35-1U1M    |                            | TVS diode                                       | QFN-1610             | STMicroelectronics   |
| D12                      | ESDA25L           |                            | SMD TVS diode                                   | SOT23                | STMicroelectronics   |
| F1                       | 39213150000       | FUSE 3.15 A                | Radial lead time lag fuse                       | 8.5X4                | LittellFuse          |
| HON, LON, SRGD, GP0, GP1 |                   | N.M.                       | Test point pad                                  |                      |                      |
| J1                       |                   | Input pads                 | Plated holes for cable.                         |                      |                      |
| J2                       | 2012670005        |                            | USB-C Receptacle                                |                      | Molex                |
| J3                       | 90325-0006        |                            | Conn flat male 6 pins, straight, pitch 1.27 mm  |                      | Molex                |
| J4                       | 282837-2          | Screws connector           | Screw connector, single row, 5.08 pitch, 13.5 A | 5.08 mm              | TE Connectivity      |
| J5                       | M20-9993645       |                            | Male strip 4 pins pitch 2.54 180°               |                      | Harwin Inc.          |
| JP1                      |                   | SMD Jumper / <b>CLOSED</b> | Jumper_SMD - <b>CLOSE with solder drop</b>      | 2 p medium           |                      |
| L1                       | CM13090CT-242     |                            | Common mode choke                               |                      | Bourns               |
| L2                       | 744779100         | 10µH                       | Radial leaded wire wound inductor               | Radial               | Würth Elektronik     |
| LN1, LN2, LN3            |                   | LINK                       | PCB link: ignore                                |                      |                      |
| MG1                      | MASTERGAN4        |                            | GaN half-bridge w. driver                       | 31VFQFPN 9 x 9 x 1.0 | STMicroelectronics   |
| Q1, Q2                   | BSS169H6327XTSA1  |                            | SMD N-ch MOSFET                                 | SOT23                | Infineon             |
| Q3                       | BC847BM           |                            | NPN Transistor general purpose                  | SOT883               | Nexperia             |
| Q4                       | BSC146N10LS5ATMA1 |                            | SMD N-ch power MOSFET                           | PowerFLAT            | Infineon             |

| Reference      | Part Number        | Value  | Description                                    | Package   | Manufacturer        |
|----------------|--------------------|--------|------------------------------------------------|-----------|---------------------|
| Q5             | ZVN3320FTA         |        | SMD N-ch MOSFET                                | SOT23     | Diodes Incorporated |
| Q6             | STL160NS3LLH7      |        | SMD N-ch power MOSFET                          | PowerFLAT | STMicroelectronics  |
| R1             |                    | 4.7kΩ  | SMD resistor                                   | 0603      |                     |
| R2             | RC0805FR-072M2L    | 2.2MΩ  | SMD resistor                                   | 0805      | Yageo               |
| R3             | RC0603FR-0720RL    | 20Ω    | SMD resistor                                   | 0603      | Yageo               |
| R4, R9         | RC0402FR-07220RL   | 220Ω   | SMD resistor                                   | 0402      | Yageo               |
| R5, R6, R7, R8 | UCR03EVPFLR620     | 0.62Ω  | SMD current sense resistor                     | 0603      | ROHM                |
| R10            | RC0603FR-071KL     | 1kΩ    | SMD resistor                                   | 0603      | Yageo               |
| R11            | CRCW04024K70FKEDC  | 12.1kΩ | SMD resistor                                   | 0402      | Vishay              |
| R12            | RC0402FR-071K5L    | 1.5kΩ  | SMD resistor                                   | 0402      | Yageo               |
| R13            | RC0402FR-0718KL    | 18kΩ   | SMD resistor                                   | 0402      | Yageo               |
| R14            | RC0402FR-07270KL   | 270kΩ  | SMD resistor                                   | 0402      | Yageo               |
| R15            | RC0402FR-07470KL   | 470kΩ  | SMD resistor                                   | 0402      | Yageo               |
| R16            | ERJ-2RKF1912X      | 19.1kΩ | SMD resistor                                   | 0402      | Panasonic           |
| R17, R18, R37  | RC0402FR-0747KL    | 47kΩ   | SMD resistor                                   | 0402      | Yageo               |
| R19, R26       | CRCW040210R0JNED   | 10Ω    | SMD resistor                                   | 0402      | Vishay              |
| R20            | RC0402FR-07120KL   | 120kΩ  | SMD resistor                                   | 0402      | Yageo               |
| R21            | RC0402FR-07430KL   | 430kΩ  | SMD resistor                                   | 0402      | Yageo               |
| R22            | RC0402FR-0722RL    | 22Ω    | SMD resistor                                   | 0402      | Yageo               |
| R23, R28, R30  | RC0402FR-07100KL   | 100kΩ  | SMD resistor                                   | 0402      | Yageo               |
| R24, R35       | MCR01MZPJ000       | 0Ω     | SMD resistor                                   | 0402      | ROHM                |
| R25            |                    | N.M.   | SMD resistor                                   | 0402      |                     |
| R27            | RC0402JR-071KL     | 1kΩ    | SMD resistor                                   | 0402      | Yageo               |
| R29            | RC0402FR-07287RL   | 287Ω   | SMD resistor                                   | 0402      | Yageo               |
| R31            | RC0402FR-071RL     | 1Ω     | SMD resistor                                   | 0402      | Yageo               |
| R32            | WSLP08055L000FEA18 | 5mΩ    | SMD very high power, low value resistor        | 0805      | Vishay              |
| R33            | RC0402FR-07100RL   | 100Ω   | SMD resistor                                   | 0402      | Yageo               |
| R34            | CRG0603F100K       | 100kΩ  | SMD resistor                                   | 0603      | TE Connectivity     |
| R36            |                    | 47Ω    | SMD resistor                                   | 0402      |                     |
| RT1            | NCP15WM474J03RC    | 470kΩ  | SMD thermistor NTC                             | 0402      | Murata              |
| T1             | 750318810_R5       |        | RM8 extended rail transformer                  |           | Würth               |
| U1             | ST-ONE             |        | Fully integrated controller for smart chargers | SSOP36    | STMicroelectronics  |
| U2             | LDO40LPURY         |        | Low drop out regulator                         | 6-DFN     | STMicroelectronics  |

## Revision history

**Table 1. Document revision history**

| Date        | Version | Changes          |
|-------------|---------|------------------|
| 23-May-2022 | 1       | Initial release. |

---

## Contents

|          |                                                     |          |
|----------|-----------------------------------------------------|----------|
| <b>1</b> | <b>Schematic diagram and bill of material .....</b> | <b>2</b> |
|          | <b>Revision history .....</b>                       | <b>6</b> |
|          | <b>List of tables .....</b>                         | <b>8</b> |
|          | <b>List of figures.....</b>                         | <b>9</b> |



---

## List of tables

|                 |                                     |   |
|-----------------|-------------------------------------|---|
| <b>Table 1.</b> | Document revision history . . . . . | 6 |
|-----------------|-------------------------------------|---|

## List of figures

|                  |                             |   |
|------------------|-----------------------------|---|
| <b>Figure 1.</b> | Schematic diagram . . . . . | 2 |
|------------------|-----------------------------|---|

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[EVLONE65W](#)