# Surface Mount **RF Transformer**

**50**Ω

### 0.004 to 300 MHz


#### **Maximum Ratings**

| Operating Temperature             | -20°C to 85°C                |
|-----------------------------------|------------------------------|
| Storage Temperature               | 55°C to 100°C                |
| RF Power                          | 250mW                        |
| DC Current                        | 30mA                         |
| Pormonont domago may occur if any | of those limits are exceeded |

#### **Pin Connections**


| PRIMARY DOT   | 4 |
|---------------|---|
| PRIMARY       | 6 |
| PRIMARY CT    | 5 |
| SECONDARY DOT | 3 |
| SECONDARY     | 1 |
| SECONDARY CT  | 2 |
|               |   |

#### **Outline Drawing**



| Outline Dimensions (inch) |      |      |      |      |       |
|---------------------------|------|------|------|------|-------|
| А                         | в    | С    | D    | Е    | F     |
| .30                       | .27  | .23  | .010 | .042 | .020  |
| 7.62                      | 6.86 | 5.84 | 0.25 | 1.07 | 0.51  |
| G                         | н    | J    | к    | L    | wt    |
| .100                      | .05  | .09  | .31  | .036 | grams |
| 2.54                      | 1.27 | 2.29 | 7.87 | 0.91 | 0.50  |

| 00 | .00  | .00  | .01  | .000 | gramo |
|----|------|------|------|------|-------|
| 54 | 1.27 | 2.29 | 7.87 | 0.91 | 0.50  |
|    |      |      |      |      |       |
|    |      |      |      |      |       |
|    |      |      |      |      |       |
|    |      |      |      |      |       |
|    |      |      |      |      |       |



#### **Features**

- wideband, 0.004 to 300 MHz
- good return loss
- also available with surface mount gull wing (KK81) plug-in (X65) leads

#### **Applications**

- HF/VHF
- impedance matching
- balanced antenna





CASE STYLE: W38

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


#### **Transformer Electrical Specifications**

|   | FREQUENCY<br>(MHz) | INSERTION LOSS* |             |             |
|---|--------------------|-----------------|-------------|-------------|
|   |                    | 3 dB<br>MHz     | 2 dB<br>MHz | 1 dB<br>MHz |
| 1 | 0.004-300          | 0.004-300       | 0.02-200    | 0.1-50      |

\* Insertion Loss is specified with input at pin 4 and output at pin 1 with pins 6 & 3 grounded and pins 2 & 5 open.

#### **Typical Performance Data**

| .,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, |    |                           |                          |  |
|---|----|---------------------------|--------------------------|--|
| FREQU<br>(Mł                            |    | INSERTION<br>LOSS<br>(dB) | INPUT<br>R. LOSS<br>(dB) |  |
| 0.0                                     | 04 | 2.53                      | 4.71                     |  |
| 0.0                                     | 20 | 0.29                      | 15.34                    |  |
| 1.1                                     | 50 | 0.10                      | 37.84                    |  |
| 100.8                                   | 60 | 0.89                      | 10.71                    |  |
| 151.5                                   | 10 | 1.10                      | 9.32                     |  |
| 200.0                                   | 00 | 1.08                      | 9.41                     |  |
| 280.2                                   | 50 | 0.87                      | 12.74                    |  |
| 350.0                                   | 00 | 0.81                      | 24.39                    |  |
| 430.2                                   | 50 | 1.11                      | 11.24                    |  |
| 500.0                                   | 00 | 2.74                      | 6.16                     |  |

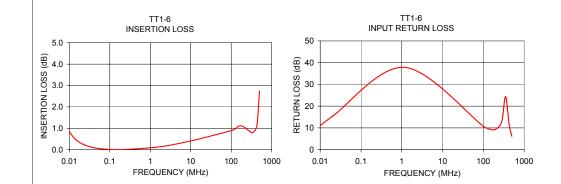

Notes

A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

REV. B M151107 TT1-6 IG/TD/CP Page 1 of 1

### Mini-Circuits

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Mini-Circuits:}}{\frac{TT1-6+}{2}}$