


Discovery kit with STM32L562QE MCU

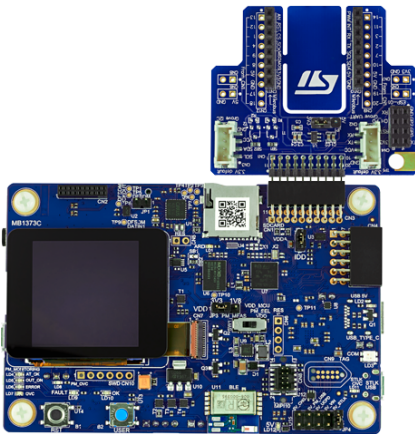

STM32L562E-DK top view. Picture is not contractual.

Features

- STM32L562QE16QU microcontroller featuring 512 Kbytes of Flash memory and 256 Kbytes of SRAM in BGA132 package
- 1.54" 240 × 240 pixel-262K color TFT LCD module with parallel interface and touch-control panel
- USB Type-C™ Sink device FS
- On-board energy meter: 300 nA to 150 mA measurement range with a dedicated USB interface
- SAI Audio CODEC
- MEMS digital microphones
- 512-Mbit Octal-SPI Flash memory
- Bluetooth® V4.1 Low Energy module
- iNEMO 3D accelerometer and 3D gyroscope
- 2 user LEDs
- User and reset push-buttons
- Board connectors:
 - USB Type-C™
 - microSD™ card
 - Stereo headset jack including analog microphone input
 - JTAG debugger
 - DPM dynamic-power measurement interface for external device
 - STMod+ expansion connector with fan-out expansion board for Wi-Fi®, Grove and mikroBUS™ compatible connectors
 - Pmod™ expansion connector
 - Audio MEMS daughterboard expansion connector
 - ARDUINO® Uno V3 expansion connector
- Flexible power-supply options: ST-LINK, USB V_{BUS} or external sources
- On-board STLINK-V3E debugger/programmer with USB re-enumeration capability: mass storage, Virtual COM port, and debug port
- Comprehensive free software libraries and examples available with the [STM32CubeL5 MCU Package](#)
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, and STM32CubeIDE

Product status link

[STM32L562E-DK](#)

Description

The [STM32L562E-DK](#) Discovery kit is a complete demonstration and development platform for Arm® Cortex®-M33 with Arm® TrustZone® and ARMv8-M mainline security extension core-based [STM32L562QEI6QU](#) microcontroller, with 512 Kbytes of Flash memory and 256 Kbytes of SRAM.

The STM32L562E-DK Discovery kit makes use of the STM32L562QEI6QU innovative ultra-low-power oriented features to enable prototyping for many wearable or sensor applications, with state-of-the-art energy efficiency, secure boot, and TrustZone®-based software isolation.

For even more user-friendliness, the on-board STLINK-V3E debugger provides out-of-the-box loading and debugging capabilities, as well as USB Virtual COM port bridge.

1 Ordering information

To order the STM32L562E-DK Discovery kit, refer to [Table 1](#). For a detailed description, refer to its user manual on the product web page. Additional information is available from the datasheet and reference manual of the target STM32.

Table 1. List of available products

Order code	Board references	User manual	Target STM32
STM32L562E-DK	<ul style="list-style-type: none"> MB1373 MB1280⁽¹⁾ 	UM2617	STM32L562QE16QU

1. Fan-out board.

1.1 Product marking

Evaluation tools marked as “ES” or “E” are not yet qualified and therefore not ready to be used as reference design or in production. Any consequences deriving from such usage will not be at ST charge. In no event, ST will be liable for any customer usage of these engineering sample tools as reference designs or in production.

“E” or “ES” marking examples of location:

- On the targeted STM32 that is soldered on the board (For an illustration of STM32 marking, refer to the STM32 datasheet “Package information” paragraph at the www.st.com website).
- Next to the evaluation tool ordering part number that is stuck or silk-screen printed on the board.

This board features a specific STM32 device version, which allows the operation of any bundled commercial stack/library available. This STM32 device shows a “U” marking option at the end of the standard part number and is not available for sales.

In order to use the same commercial stack in his application, a developer may need to purchase a part number specific to this stack/library. The price of those part numbers includes the stack/library royalties.

1.2 Codification

The meaning of the codification is explained in [Table 2](#). The order code is mentioned on a sticker placed on the top or bottom side of the board.

Table 2. Codification explanation

STM32TXXY-DK	Description	Example: STM32L562E-DK
STM32TT	MCU series in STM32 32-bit Arm Cortex MCUs	STM32L5 Series
XX	MCU product line in the series	STM32L562
Y	STM32 Flash memory size: <ul style="list-style-type: none"> E for 512 Kbytes 	512 Kbytes

2 Development environment

The STM32L562E-DK Discovery kit runs with the STM32L562QEI6QU 32-bit microcontroller based on the Arm® Cortex®-M33 core with Arm® TrustZone® and the ARMv8-M mainline security extension.

Note: Arm and TrustZone are registered trademarks of Arm Limited (or its subsidiaries) in the US and or elsewhere.

arm

2.1 System requirements

- Windows® OS (7, 8 and 10), Linux® 64-bit, or macOS®
- USB Type-A to Micro-B cable

Note: macOS® is a trademark of Apple Inc. registered in the U.S. and other countries.
All other trademarks are the property of their respective owners.

2.2 Development toolchains

- IAR™ - EWARM (see [note](#))
- Keil® - MDK-ARM (see [note](#))
- STMicroelectronics - STM32CubeIDE

Note: On Windows® only.

2.3 Demonstration software

The demonstration software, included in the STM32Cube MCU Package corresponding to the on-board microcontroller, is preloaded in the STM32 Flash memory for easy demonstration of the device peripherals in standalone mode. The latest versions of the demonstration source code and associated documentation can be downloaded from www.st.com.

Revision history

Table 3. Document revision history

Date	Version	Changes
30-Sep-2018	1	Initial release
6-Mar-2020	2	Added the support of STMicroelectronics STM32CubeIDE integrated development environment in Features and Development toolchains .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STM32L562E-DK](#)