


PIN Power Inductor


RCH1216B




Dimension - [mm]

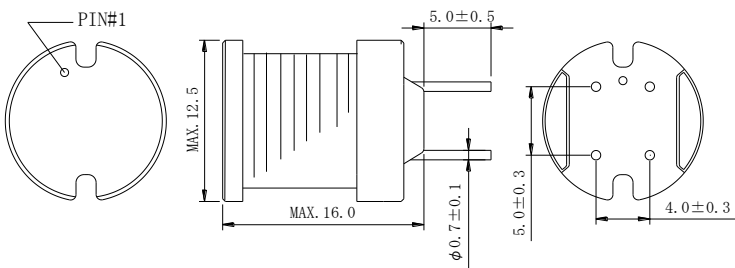

Schematics - [mm]



(10 μ H~47 μ H)



(56 μ H~2.2mH)

Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L $\times$ W $\times$ H: 12.5 $\times$ 12.5 $\times$ 16.0mm Max.
- Product weight: 5.2g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -30°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -30°C~+100°C

Packaging


- Box packaging.

Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.

PIN Power Inductor

RCH1216B



Electrical Characteristics

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. [MAX.](Ω) at 20°C	DC SUPERPOSITION PERMISSION CURRENT (A)※2		TEMPERATURE RISE CURRENT (A) ※3
				at 20°C	at 100°C	
RCH1216BNP-100M	100M	10μH ± 20%	24m(19m)	9.00	8.00	5.00
RCH1216BNP-120M	120M	12μH ± 20%	26m(21m)	7.80	7.00	4.60
RCH1216BNP-150M	150M	15μH ± 20%	29m(23m)	7.20	6.20	4.40
RCH1216BNP-180M	180M	18μH ± 20%	33m(26m)	6.75	5.80	4.20
RCH1216BNP-220M	220M	22μH ± 20%	37m(29m)	6.00	5.30	4.00
RCH1216BNP-270M	270M	27μH ± 20%	41m(32m)	5.50	4.80	3.80
RCH1216BNP-330M	330M	33μH ± 20%	46m(36m)	5.00	4.50	3.60
RCH1216BNP-390M	390M	39μH ± 20%	49m(39m)	4.70	4.10	3.30
RCH1216BNP-470M	470M	47μH ± 20%	56m(44m)	4.30	3.80	3.20
RCH1216BNP-560K	560K	56μH ± 10%	87m(69m)	4.10	3.70	2.70
RCH1216BNP-680K	680K	68μH ± 10%	98m(78m)	3.80	3.30	2.40
RCH1216BNP-820K	820K	82μH ± 10%	107m(85m)	3.20	2.90	2.25
RCH1216BNP-101K	101K	100μH ± 10%	121m(96m)	3.00	2.70	2.15
RCH1216BNP-121K	121K	120μH ± 10%	134m(107m)	2.85	2.60	2.05
RCH1216BNP-151K	151K	150μH ± 10%	156m(124m)	2.55	2.35	1.90
RCH1216BNP-181K	181K	180μH ± 10%	206m(164m)	2.20	2.05	1.65
RCH1216BNP-221K	221K	220μH ± 10%	236m(188m)	2.00	1.85	1.55
RCH1216BNP-271K	271K	270μH ± 10%	0.32(0.25)	1.85	1.70	1.40
RCH1216BNP-331K	331K	330μH ± 10%	0.37(0.29)	1.65	1.53	1.30
RCH1216BNP-391K	391K	390μH ± 10%	0.48(0.38)	1.55	1.35	1.05
RCH1216BNP-471K	471K	470μH ± 10%	0.55(0.44)	1.45	1.25	1.00
RCH1216BNP-561K	561K	560μH ± 10%	0.62(0.49)	1.36	1.18	0.95
RCH1216BNP-681K	681K	680μH ± 10%	0.79(0.63)	1.20	1.06	0.82
RCH1216BNP-821K	821K	820μH ± 10%	0.88(0.70)	1.14	0.97	0.75
RCH1216BNP-102K	102K	1.0mH ± 10%	1.13(0.90)	1.00	0.80	0.65
RCH1216BNP-122K	122K	1.2mH ± 10%	1.25(1.00)	0.89	0.76	0.61
RCH1216BNP-152K	152K	1.5mH ± 10%	1.52(1.26)	0.85	0.70	0.54
RCH1216BNP-182K	182K	1.8mH ± 10%	1.93(1.60)	0.76	0.63	0.46
RCH1216BNP-222K	222K	2.2mH ± 10%	2.52(2.10)	0.65	0.57	0.41

※1. Inductance measuring condition: at 1kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^{\circ}\text{C}$ ($T_a = 20^{\circ}\text{C}$).


PIN Power Inductor

RCH1216B




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

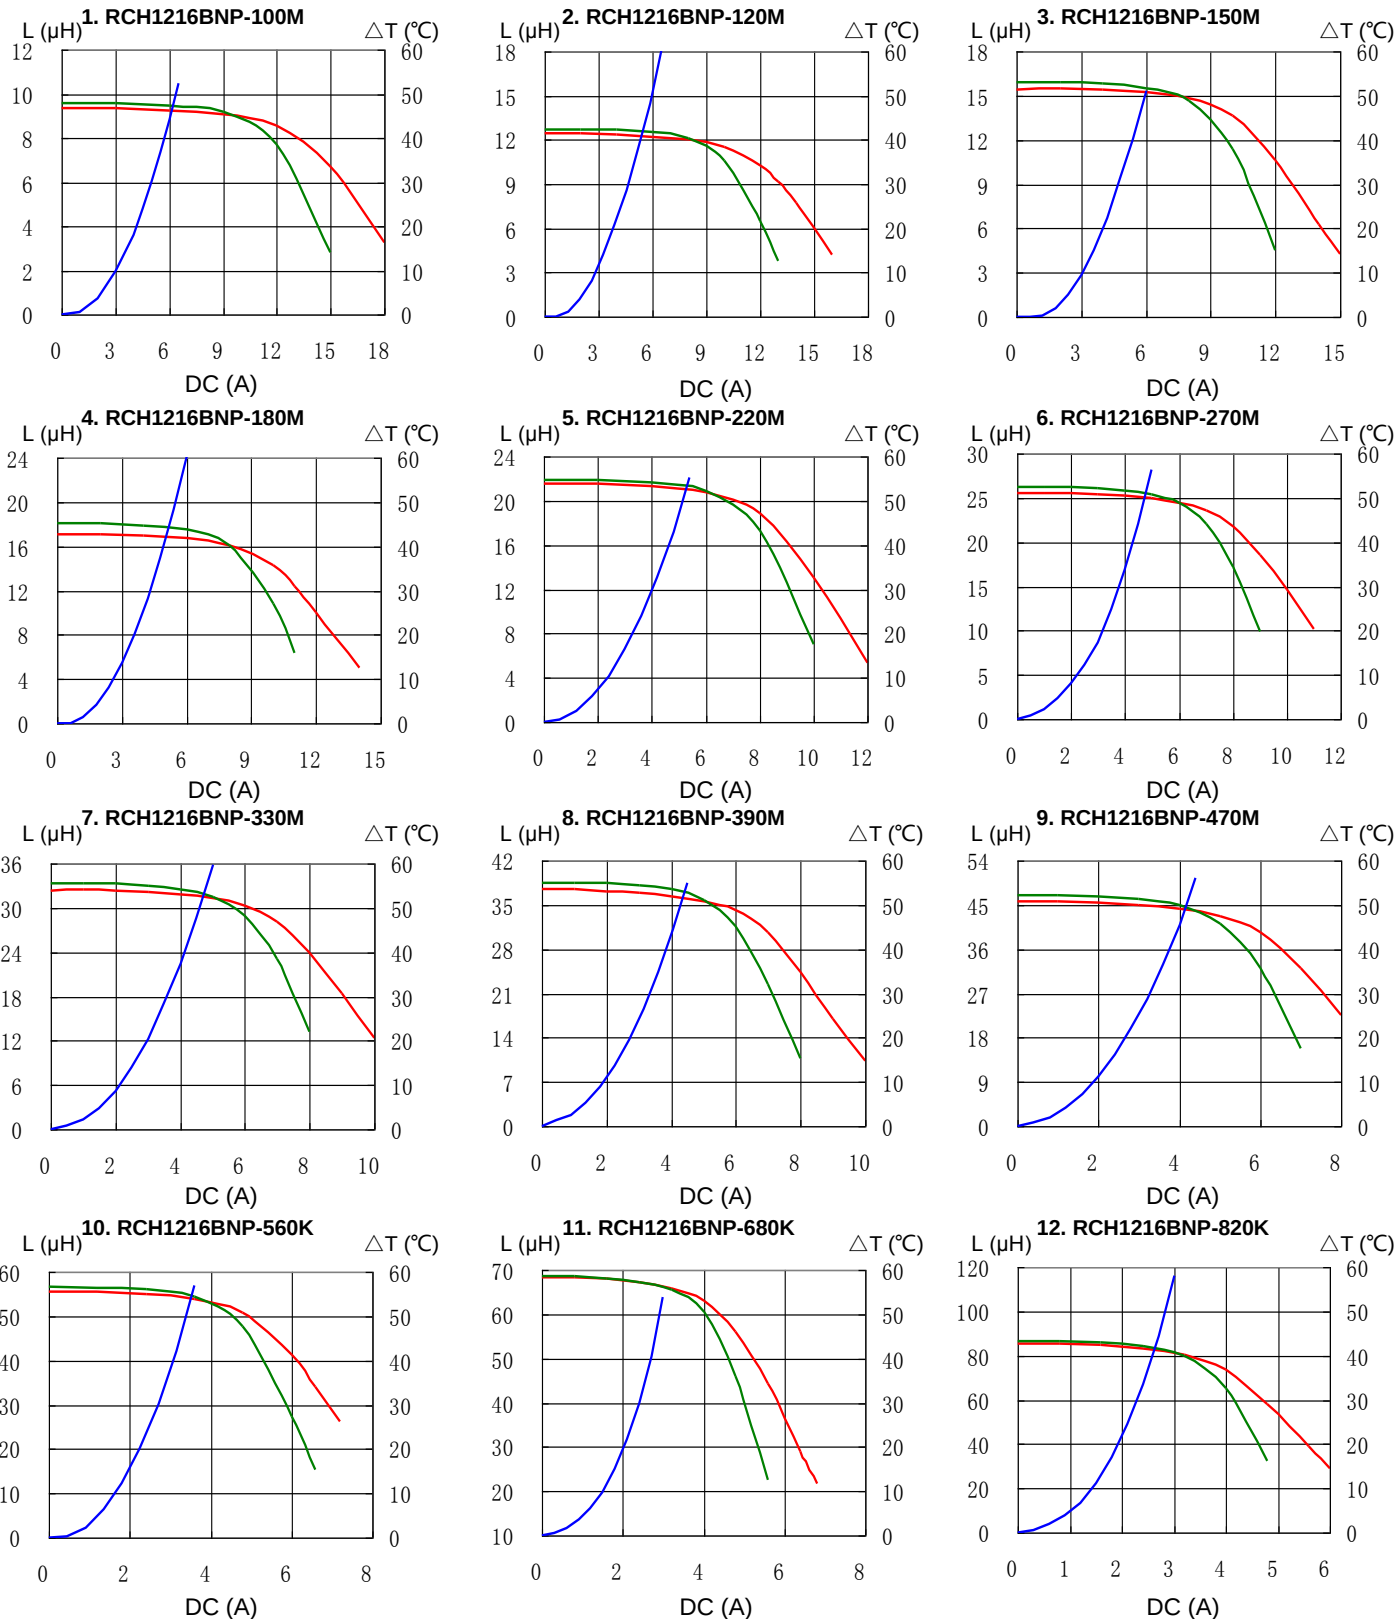


PIN Power Inductor

RCH1216B



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

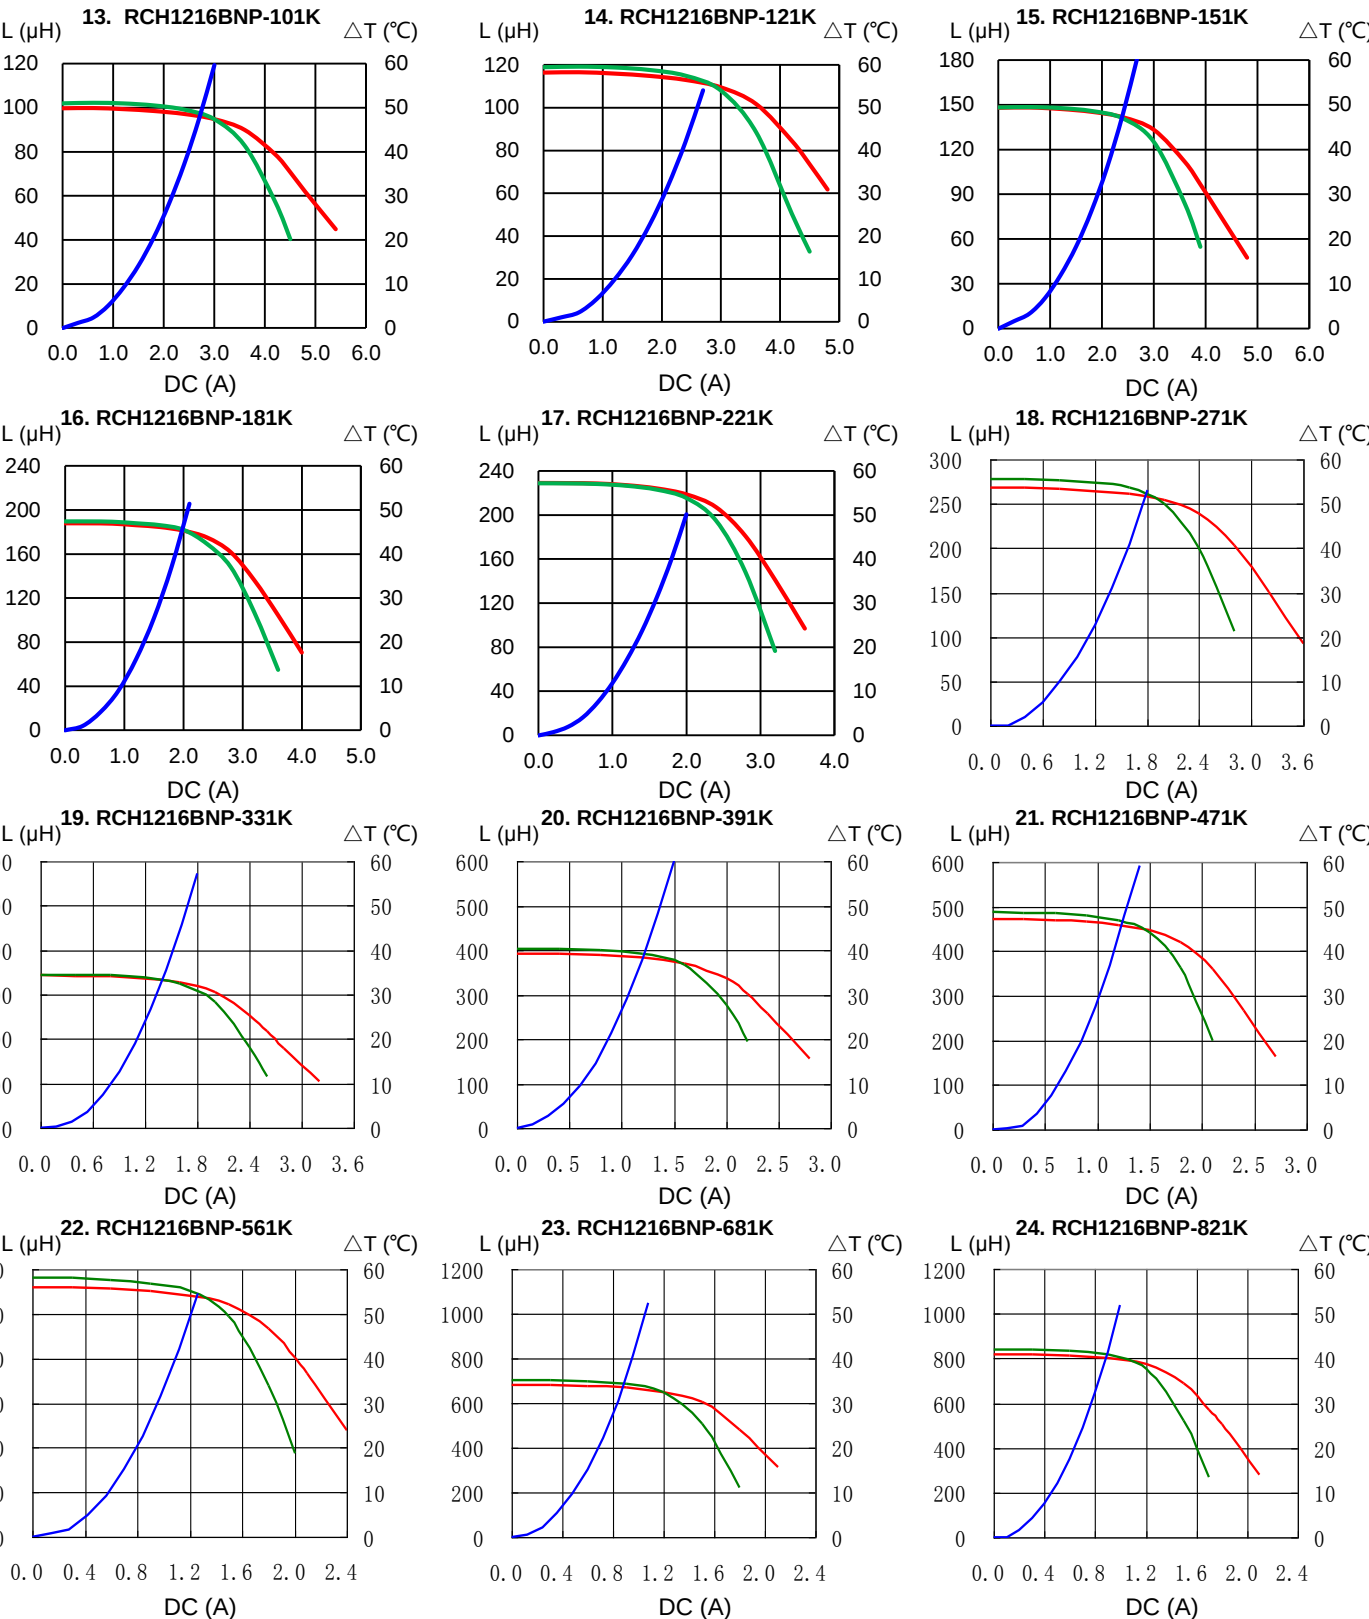


PIN Power Inductor RCH1216B



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

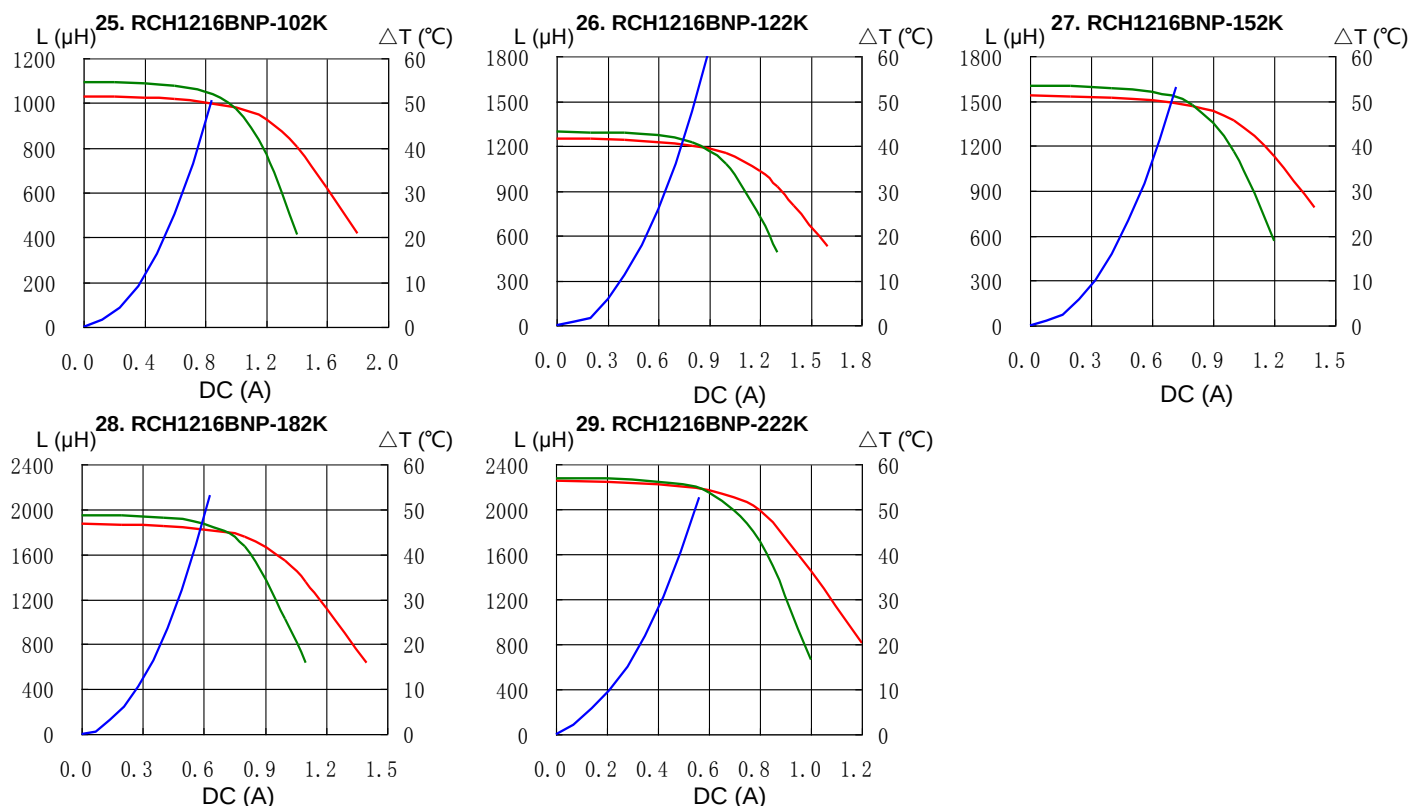

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sumida:](#)

<u>RCH1216BNP-561K</u>	<u>RCH1216BNP-220M</u>	<u>RCH1216BNP-102K</u>	<u>RCH1216BNP-120M</u>	<u>RCH1216BNP-182K</u>
<u>RCH1216BNP-680K</u>	<u>RCH1216BNP-390M</u>	<u>RCH1216BNP-270M</u>	<u>RCH1216BNP-222K</u>	<u>RCH1216BNP-150M</u>
<u>RCH1216BNP-122K</u>	<u>RCH1216BNP-471K</u>	<u>RCH1216BNP-271K</u>	<u>RCH1216BNP-821K</u>	<u>RCH1216BNP-152K</u>
<u>RCH1216BNP-101K</u>	<u>RCH1216BNP-331K</u>	<u>RCH1216BNP-181K</u>	<u>RCH1216BNP-820K</u>	<u>RCH1216BNP-470M</u>
<u>RCH1216BNP-151K</u>	<u>RCH1216BNP-100M</u>	<u>RCH1216BNP-121K</u>	<u>RCH1216BNP-330M</u>	<u>RCH1216BNP-180M</u>
<u>RCH1216BNP-560K</u>	<u>RCH1216BNP-391K</u>	<u>RCH1216BNP-221K</u>	<u>RCH1216BNP-681K</u>	