



PIN Power Inductor


RCH4764B



Dimension - [mm]

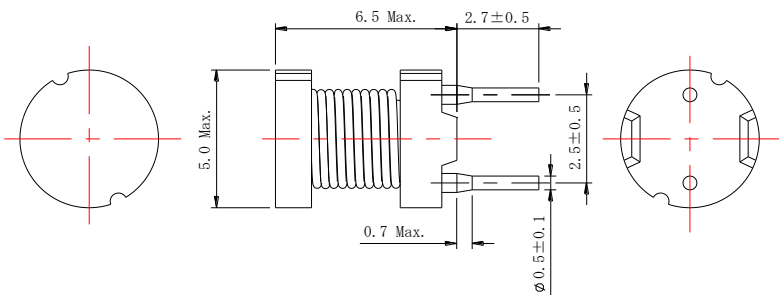

Connection - [mm]



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 5.0 × 5.0 × 6.5mm Max.
- Product weight: 0.5 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -20°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -20°C~+85°C


Packaging

- Box packaging.

Applications

- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.

PIN Power Inductor
RCH4764B



Electrical Characteristics

Part No.	Stamp	Inductance [Within] ※1	D. C. R. (Ω) Max. (typ.) (at 20°C)	Saturation current (at 20°C) (A) ※3	Temperature rise current (A) ※4
RCH4764BNP-1R5M	C	1.5 μ H $\pm$ 20%	30m (22m)	5.8	3.3
RCH4764BNP-2R7M	E	2.7 μ H $\pm$ 20%	40m (29m)	4.8	2.7
RCH4764BNP-3R9M	H	3.9 μ H $\pm$ 20%	48m (35m)	3.8	2.5
RCH4764BNP-6R8M	L	6.8 μ H $\pm$ 20%	64m (47m)	2.8	2.3
RCH4764BNP-100M	N	10 μ H $\pm$ 20%	100m (74m)	2.4	1.5
RCH4764BNP-220M	S	22 μ H $\pm$ 20%	183m (147m)	1.7	1.2
RCH4764BNP-390M	V	39 μ H $\pm$ 20%	281m (225m)	1.1	1.0
RCH4764BNP-680K	Y	68 μ H $\pm$ 10%	537m (430m)	0.9	0.72
RCH4764BNP-101K	A	100 μ H $\pm$ 10%	843m (675m)	0.78	0.58
RCH4764BNP-271K	F	270 μ H $\pm$ 10%	2.41 (1.93)	0.48	0.31
RCH4764BNP-391K	H	390 μ H $\pm$ 10%	3.36 (2.69)	0.39	0.25
RCH4764BNP-681K	L	680 μ H $\pm$ 10%	5.56 (4.45)	0.30	0.18
RCH4764BNP-102K	N	1.0mH $\pm$ 10%	8.25 (6.60)	0.24	0.16

※1: Inductance measuring condition:1.5uH~6.8uH at 100KHz ; 10uH~1.0mH at 1kHz
※2. Saturation current: The value of D.C. current when the inductance decreases to 90% of it's nominal value.
※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).


PIN Power Inductor

RCH4764B



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

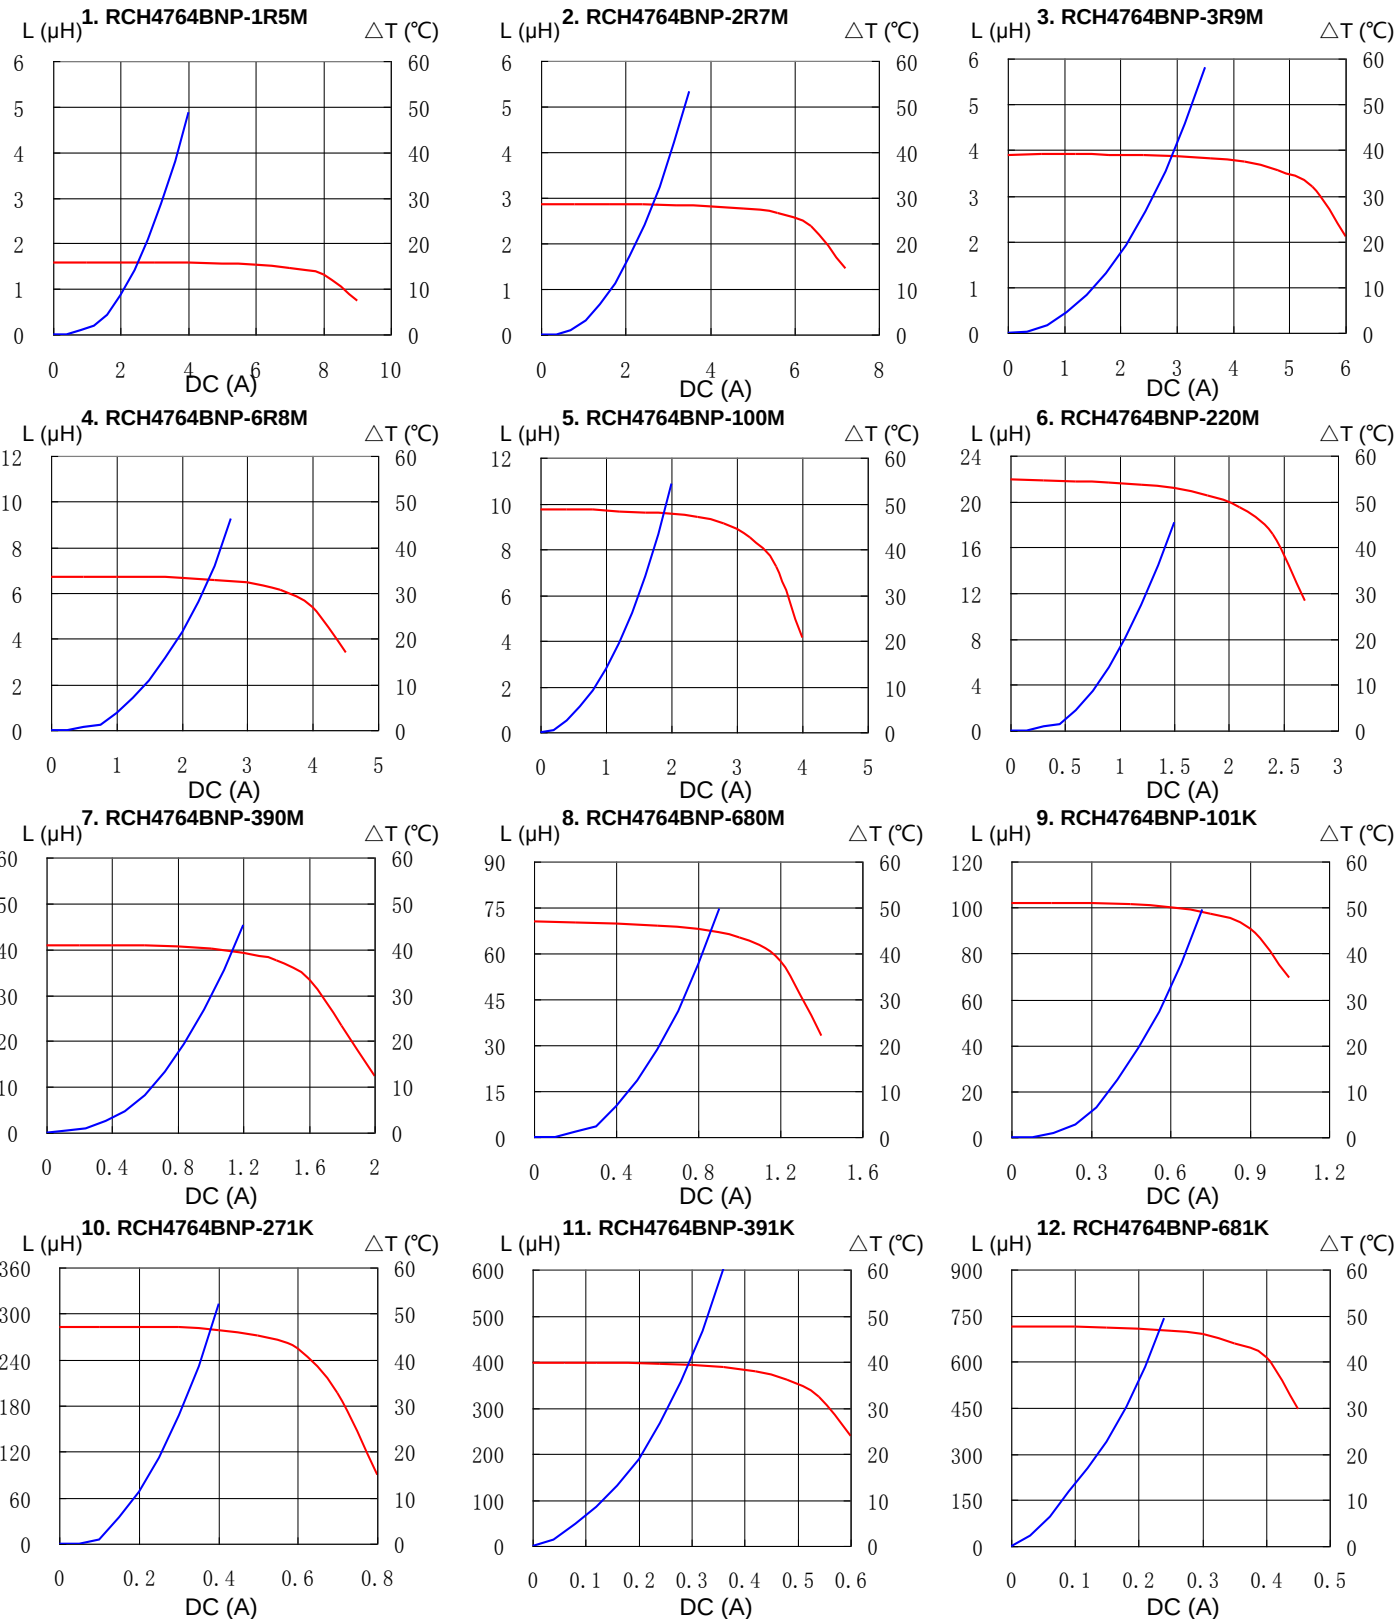


PIN Power Inductor

RCH4764B



Saturation Current & Temperature Rise Graph

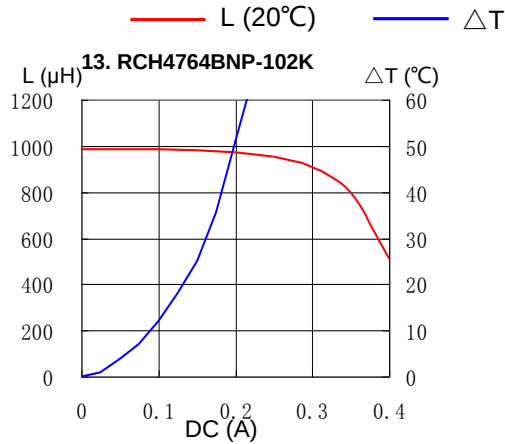

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sumida:](#)

[RCH4764BNP-100M](#) [RCH4764BNP-101K](#) [RCH4764BNP-1R5M](#) [RCH4764BNP-220M](#) [RCH4764BNP-271K](#)
[RCH4764BNP-2R7M](#) [RCH4764BNP-390M](#) [RCH4764BNP-391K](#) [RCH4764BNP-3R9M](#) [RCH4764BNP-680M](#)
[RCH4764BNP-681K](#) [RCH4764BNP-6R8M](#)