

# Thin-Film RF/Microwave Inductor Technology

## Accu-L® Series

### L0201 Tight Tolerance RF Inductor



#### ACCU-L® TECHNOLOGY

The L0201 SMD Tuning Inductor is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly.

#### APPLICATIONS

- Mobile Communications
- Satellite TV Receivers
- GPS
- Vehicle Location Systems
- Wireless LAN's
- Filters
- Matching Networks

#### HOW TO ORDER

**L0201**  
T

**xxx**  
T  
Inductance  
(nH)

**X**  
T  
Tolerance

**H**  
T  
Series

**S**  
T  
Lead Free  
Termination

**TR**  
T  
Taped &  
Reeled



P/N Example: **L02013R3BHSTR**


Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance: 125°C, IR, 4 hours

#### TERMINATION

Nickel/Lead Free solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.


#### DIMENSIONS: millimeters (inches) (TOP View)

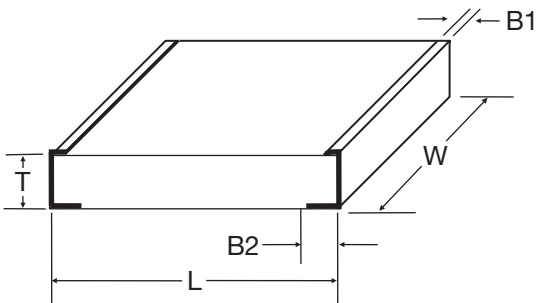

<b>L</b>	0.600±0.050 (0.024±0.002)
<b>W</b>	0.325±0.050 (0.013±0.002)
<b>T</b>	0.225±0.050 (0.009±0.002)

<b>B1</b>	0.100±0.100 (0.004±0.004)
<b>B2</b>	0.150±0.050 (0.006±0.002)

#### Recommended Pad Layout Dimensions mm (inches)

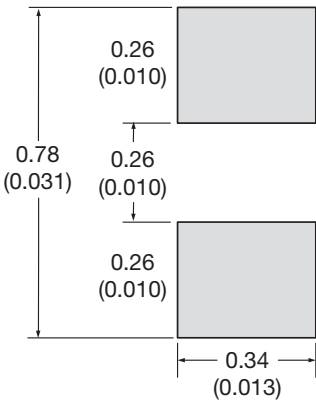

# Thin-Film RF/Microwave Inductor Technology

## Accu-L® Series

### L0201 Tight Tolerance RF Inductor



#### ELECTRICAL SPECIFICATIONS

450MHz			900MHz	1900MHz	2400MHz	SRF min. (GHz)	R <sub>DC</sub> max. (Ω)	I <sub>DC</sub> max. (mA)
L(nH)	Tolerance A=±0.05nH, B=±0.1nH, C=±0.2nH, D=±0.5nH	Q (min)	Q (Typ)	Q (Typ)	Q (Typ)			
0.33	±0.05nH, ± 0.1nH, ± 0.2nH	13	24	36	39	35	0.1	550
0.39	±0.05nH, ± 0.1nH, ± 0.2nH	11	23	34	38	33	0.1	550
0.47	±0.05nH, ± 0.1nH, ± 0.2nH	10	18	26	30	32	0.1	550
0.56	±0.05nH, ± 0.1nH, ± 0.2nH	9	16	24	27	31	0.1	500
0.68	±0.05nH, ± 0.1nH, ± 0.2nH	8	19	28	32	30	0.2	500
0.82	±0.05nH, ± 0.1nH, ± 0.2nH	8	19	28	32	28	0.2	400
1.0	±0.05nH, ± 0.1nH, ± 0.2nH	7	16	26	30	26	0.2	400
1.2	±0.05nH, ± 0.1nH, ± 0.2nH	7	16	26	30	24	0.3	300
1.5	± 0.1nH, ± 0.2nH, ± 0.5nH	7	16	26	30	23	0.5	250
1.8	± 0.1nH, ± 0.2nH, ± 0.5nH	7	15	25	29	20	0.5	250
2.2	± 0.1nH, ± 0.2nH, ± 0.5nH	7	15	22	24	18	0.6	200
2.7	± 0.1nH, ± 0.2nH, ± 0.5nH	7	15	22	24	14	0.7	180
3.3	± 0.1nH, ± 0.2nH, ± 0.5nH	7	15	22	24	13	1.0	150

All intermediate Inductance values within the indicated range are available.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Kyocera AVX:

[L02011R0AHSTR](#) [L02011R2AHSTR](#) [L02011R5BHSTR](#) [L02011R8BHSTR](#) [L02012R2BHSTR](#) [L02012R7BHSTR](#)  
[L02013R3BHSTR](#) [L0201R33AHSTR](#) [L0201R39AHSTR](#) [L0201R47AHSTR](#) [L0201R56AHSTR](#) [L0201R68AHSTR](#)  
[L0201R82AHSTR](#) [L02011R0AHSTR\500](#) [L02011R2AHSTR\500](#) [L02011R5BHSTR\500](#) [L02011R8BHSTR\500](#)  
[L02012R2BHSTR\500](#) [L02012R7BHSTR\500](#) [L02013R3BHSTR\500](#) [L0201R33AHSTR\500](#) [L0201R39AHSTR\500](#)  
[L0201R47AHSTR\500](#) [L0201R56AHSTR\500](#) [L0201R68AHSTR\500](#) [L0201R82AHSTR\500](#) [L02011R8AHSTR](#)  
[L02011R2BHSTR](#)