

## 400-750W, 9 to 18V, 18 to 32V, 18 to 60V or 28 to 60V Input Non-Isolated Step Down DC-DC Converter

<https://product.tdk.com/en/power/i7a>  
[www.emea.lambda.tdk.com/i7a](http://www.emea.lambda.tdk.com/i7a)



Industrial



Test



COMM



Broadcast



Robotics



The i7A series of up to 750W non-isolated DC-DC step-down converters are ideal for creating additional high current/high power 20A, 33A, 45A and 60A output voltage rails from a single output 12V, 24V, 36V or 48V AC-DC or DC-DC power supply. The highly efficient i7A series has low ripple, excellent dynamic response under sudden load changes, accepts a wide DC input with a wide output adjustment range and optional current limit (OCP) adjust. Three mechanical configurations are available; low profile open frame, baseplate construction for conduction cooling, or models with an integral heat sink for convection or forced air cooling. The i7A series expands upon TDK-Lambda's existing 100 to 250W rated [i3A](#) / [i6A](#) series and reduces the need to parallel modules.

### Features

- Up to 750W in a 1/16th Brick Footprint
- High Efficiency - Up to 98.5%
- Wide 0.8 to 8V or 3.3 up to 32V Output Adjustment
- 9 to 18V, 18 to 32V, 18 to 60V or 28 to 60V Input
- Low Component Count With Minimal External Components
- Minimal Derating Requirements in Low Airflow Environments

### Benefits

- High Power Density, Less Board Area Needed
- Longer Battery Life / Less Power Consumed
- One Part Supports Multiple System Voltages
- Can Operate From Different DC Source Voltages Including Batteries
- Low Cost
- Easy To Cool In End System

### Model Selector

| Model                               | Input Voltage (V) | Output Voltage (V) | Max O/P Current (A) | Max O/P Power (W) | Remote On/Off Logic | Adjustable (OCP) Current Limit | Integrated Heatsink | Integrated Baseplate |
|-------------------------------------|-------------------|--------------------|---------------------|-------------------|---------------------|--------------------------------|---------------------|----------------------|
| <a href="#">i7A4W033A033V-000-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Positive            | -                              | -                   | -                    |
| <a href="#">i7A4W033A033V-001-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Negative            | -                              | -                   | -                    |
| <a href="#">i7A4W033A033V-003-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Negative            | Yes                            | -                   | -                    |
| <a href="#">i7A4W033A033V-0C1-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Negative            | -                              | -                   | Yes                  |
| <a href="#">i7A4W033A033V-0C3-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Negative            | Yes                            | -                   | Yes                  |
| <a href="#">i7A4W033A033V-0F1-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Negative            | -                              | Yes                 | -                    |
| <a href="#">i7A4W033A033V-0F3-R</a> | 18 - 60           | 3.3 - 24           | 33                  | 500               | Negative            | Yes                            | Yes                 | -                    |
| <a href="#">i7A24045A033V-000-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Positive            | -                              | -                   | -                    |
| <a href="#">i7A24045A033V-001-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Negative            | -                              | -                   | -                    |
| <a href="#">i7A24045A033V-003-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Negative            | Yes                            | -                   | -                    |
| <a href="#">i7A24045A033V-0C1-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Negative            | -                              | -                   | Yes                  |
| <a href="#">i7A24045A033V-0C3-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Negative            | Yes                            | -                   | Yes                  |
| <a href="#">i7A24045A033V-0F1-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Negative            | -                              | Yes                 | -                    |
| <a href="#">i7A24045A033V-0F3-R</a> | 18 - 32           | 3.3 - 18           | 45                  | 750               | Negative            | Yes                            | Yes                 | -                    |
| <a href="#">i7A12060A008V-000-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Positive            | -                              | -                   | -                    |
| <a href="#">i7A12060A008V-001-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Negative            | -                              | -                   | -                    |
| <a href="#">i7A12060A008V-003-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Negative            | Yes                            | -                   | -                    |
| <a href="#">i7A12060A008V-0C1-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Negative            | -                              | -                   | Yes                  |
| <a href="#">i7A12060A008V-0C3-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Negative            | Yes                            | -                   | Yes                  |
| <a href="#">i7A12060A008V-0F1-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Negative            | -                              | Yes                 | -                    |
| <a href="#">i7A12060A008V-0F3-R</a> | 9 - 18            | 0.8 - 8            | 60                  | 400               | Negative            | Yes                            | Yes                 | -                    |
| <a href="#">i7A48020A033V-000-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Positive            | -                              | -                   | -                    |
| <a href="#">i7A48020A033V-001-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Negative            | -                              | -                   | -                    |
| <a href="#">i7A48020A033V-003-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Negative            | Yes                            | -                   | -                    |
| <a href="#">i7A48020A033V-0C1-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Negative            | -                              | -                   | Yes                  |
| <a href="#">i7A48020A033V-0C3-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Negative            | Yes                            | -                   | Yes                  |
| <a href="#">i7A48020A033V-0F1-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Negative            | -                              | Yes                 | -                    |
| <a href="#">i7A48020A033V-0F3-R</a> | 28 - 60           | 3.3 - 32           | 20                  | 500               | Negative            | Yes                            | Yes                 | -                    |

Preferred Model

| Specification                          |        |                                                                                                           |                                                             |                                                               |                                                              |
|----------------------------------------|--------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------|
| Model                                  |        | i7A4W033A033V                                                                                             | i7A24045A033V                                               | i7A12060A008V                                                 | i7A48020A033V                                                |
| Input                                  |        |                                                                                                           |                                                             |                                                               |                                                              |
| Input Voltage Range                    | Vdc    | 18 - 60 (Turn on at 16.5 typ)                                                                             | 18 - 32 (Turn on at 16.5 typ)                               | 9 - 18 (Turn on at 8.1 typ)                                   | 28 - 60 (Turn on at 8.1V typ)                                |
| Input Transient (t < 100 ms)           | Vdc    | 65 max                                                                                                    | 36 max                                                      | 22 max                                                        | 22 max                                                       |
| Input Current (max)                    | A      | 50                                                                                                        |                                                             | 65                                                            | 35                                                           |
| Efficiency                             | %      | 91 - 98                                                                                                   | 93 - 98.5                                                   | 86 - 97                                                       | 92-96                                                        |
| Safety Certifications and Markings     | -      | IEC/EN/UL/CSA/EN62368-1, CE Mark and UKCA Mark                                                            |                                                             |                                                               |                                                              |
| Output                                 |        |                                                                                                           |                                                             |                                                               |                                                              |
| Output Voltage Tolerance               | %      | ±3.5                                                                                                      |                                                             |                                                               |                                                              |
| Switching Frequency                    | kHz    | 330                                                                                                       |                                                             |                                                               |                                                              |
| Line Regulation                        | %      | 0.2                                                                                                       |                                                             |                                                               |                                                              |
| Load Regulation                        | %      | 0.4                                                                                                       |                                                             |                                                               |                                                              |
| External Load Capacitance              | uF     | 220 - 10000                                                                                               | 330 - 10000                                                 |                                                               |                                                              |
| Output Current                         | A      | 0 - 33                                                                                                    | 0 - 45                                                      | 0 - 60                                                        | 0 - 20                                                       |
| Ripple & Noise                         | mVpp   | 25                                                                                                        |                                                             | 40                                                            | 25                                                           |
| Overcurrent Protection Threshold (typ) | A      | 45                                                                                                        | 63                                                          | 70                                                            | 30                                                           |
| Overtemperature Protection             | -      | Yes                                                                                                       |                                                             |                                                               |                                                              |
| Remote Sense                           | -      | (+) Sense, compensating up to 5% of output voltage                                                        |                                                             |                                                               |                                                              |
| Remote On/Off                          | -      | See Model Selector table                                                                                  |                                                             |                                                               |                                                              |
| Output Voltage Adjust                  | -      | See detailed specifications for trim equation.                                                            |                                                             |                                                               |                                                              |
| Output Current Limit Adjust            | -      | See Model Selector and detailed specifications.                                                           |                                                             |                                                               |                                                              |
| Dynamic Response                       | -      | 420 mV / 70 µs typ.<br>Vo=12V, 1 A/µs,<br>25% to 75% max Io                                               | 425 mV / 80 µs typ.<br>Vo=12V, 1 A/µs,<br>25% to 50% max Io | 400 mV / 100 µs typ.<br>Vo=3.3V, 1 A/µs,<br>25% to 50% max Io | 500 mV / 180 µs typ.<br>Vo=12V, 1 A/µs,<br>25% to 75% max Io |
| Environmental                          |        |                                                                                                           |                                                             |                                                               |                                                              |
| Operating Temperature (Tref)           | °C     | -40 to 125 (See <a href="#">i7A Specifications</a> for Derating)                                          |                                                             |                                                               |                                                              |
| Storage Temperature                    | °C     | -55° to +125                                                                                              |                                                             |                                                               |                                                              |
| Humidity (non condensing)              | %RH    | 5 - 95 (Operating & Storage)                                                                              |                                                             |                                                               |                                                              |
| Cooling                                | -      | Convection, conduction (baseplate) or forced air                                                          |                                                             |                                                               |                                                              |
| Altitude <sup>(2)</sup>                | m      | 2000                                                                                                      |                                                             |                                                               |                                                              |
| Random Vibration (Operating)           |        | IEC 60068-2-64 / IPC9592B: 2.40 Grms, 10-500 Hz, 30 min per x, y, z axis                                  |                                                             |                                                               |                                                              |
| Shock (Operating)                      |        | IEC 60068-2-27 / IPC9592B: 30G, 11ms per x, y, z axis                                                     |                                                             |                                                               |                                                              |
| Other                                  |        |                                                                                                           |                                                             |                                                               |                                                              |
| Weight (Typ)                           | g      | Open Frame: 25g<br>With Baseplate: 50g<br>With Heatsink: 70g                                              |                                                             |                                                               |                                                              |
| Size (LxWxH)                           | mm     | Open Frame: 34 x 36.8 x 11.5<br>With Baseplate: 34 x 36.8 x 12.7<br>With Heatsink: 34 x 36.8 x 24.9       |                                                             |                                                               |                                                              |
| Size (LxWxH)                           | Inches | Open Frame: 1.34 x 1.45 x 0.45<br>With Baseplate: 1.34 x 1.45 x 0.50<br>With Heatsink: 1.34 x 1.45 x 0.98 |                                                             |                                                               |                                                              |
| MTBF - Telcordia SR-332                | -      | > 5 MHrs; 100% Load; Ta = 40 °C                                                                           |                                                             |                                                               |                                                              |
| Warranty                               | yrs    | 3                                                                                                         |                                                             |                                                               |                                                              |

## Notes

See website for detailed [specifications](#) and test methods.


(1) For Vo ≤ 1.2V, 470uF min capacitance is recommended.

(2) Contact Technical Support for operation at higher altitudes.

## Related Products

| Type                       | Part Number                       | Description                                                                                 |
|----------------------------|-----------------------------------|---------------------------------------------------------------------------------------------|
| DC-DC Buck Converter       | <a href="#">i3A</a>               | 100W, Input 9-53V, Output 5-30V 4.5A or 3.3-16.5V 8A                                        |
| DC-DC Buck Converter       | <a href="#">i6A24</a>             | 250W, Input 9-40V, Output 3.3-24V 14A                                                       |
| DC-DC Buck Converter       | <a href="#">i6A4W</a>             | 250W, Input 9-53V, Output 3.3-40V 10A or 3.3-15V 20A                                        |
| DC-DC Buck-Boost Converter | <a href="#">i7C</a>               | 300W, Input 9-53V or 9-36V, Output 9.6-48V 8A, 5-28V 12.5A or 8-24V 20A                     |
| DC-DC Buck Converter       | <a href="#">RGA</a>               | 250W, Input 9 up to 53V, Output 3.3 up to 40V, Rugged Modules                               |
| DC-DC Buck Converter       | <a href="#">RGB</a>               | 400-750W, Input 9 to 18V or 18 up to 60V, Output 0.8 to 8V or 3.3 up to 24V, Rugged Modules |
| DC-DC Buck-Boost Converter | <a href="#">RGC</a>               | 300W, Input 9-53V, Output 9.6-48V 8A or 5-28V 12.5A, Rugged Modules                         |
| Evaluation Kit             | <a href="#">i7A20A-C01-EVK-S1</a> | Evaluation kit with i7A48020A033V-001-R Module                                              |
| Evaluation Kit             | <a href="#">i7A33A-C01-EVK-S1</a> | Evaluation kit with i7A4W033A033V-001-R Module                                              |
| Evaluation Kit             | <a href="#">i7A45A-C01-EVK-S1</a> | Evaluation kit with i7A24045A033V-001-R Module                                              |
| Evaluation Kit             | <a href="#">i7A60A-C01-EVK-S1</a> | Evaluation kit with i7A12060A008V-001-R Module                                              |


## Typical Application Circuit (Standard model without output current limit adjust feature)

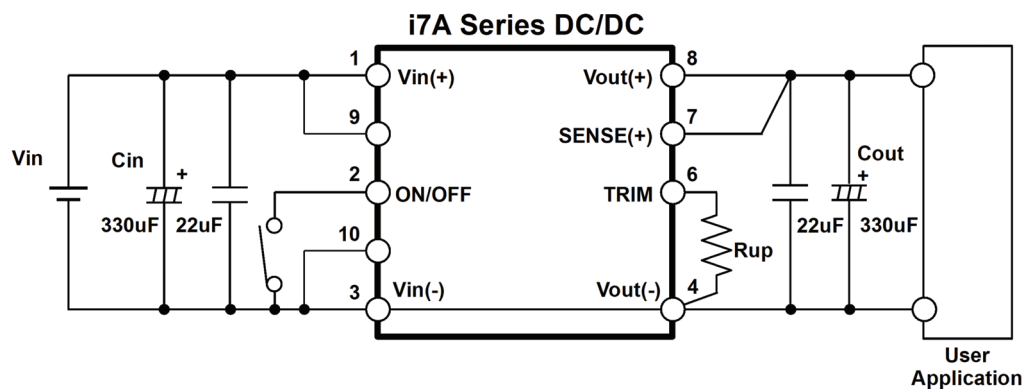

Note

1. The capacitor values can vary based on the application requirements.
2. TRIM resistor "Rup" should be connected to the i7A module as close as possible.

## Typical Application Circuit (Suffix -xx3-R with output current limit (OCP) adjust feature)

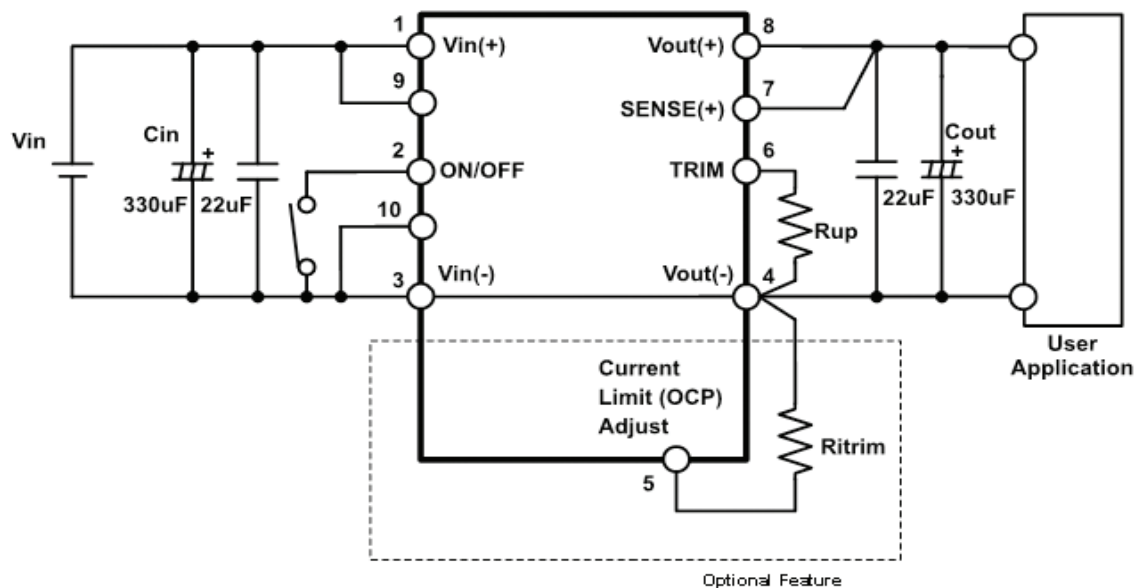


Note


1. The capacitor values can vary based on the application requirements.
2. TRIM resistor "Rup" should be connected to the i7A module as close as possible.
3. Output current limit adjust TRIM resistor "Ritrim" should be connected to the i7A module as close as possible.

Output vs. Input Voltage Operating Range


i7A4W033A033V

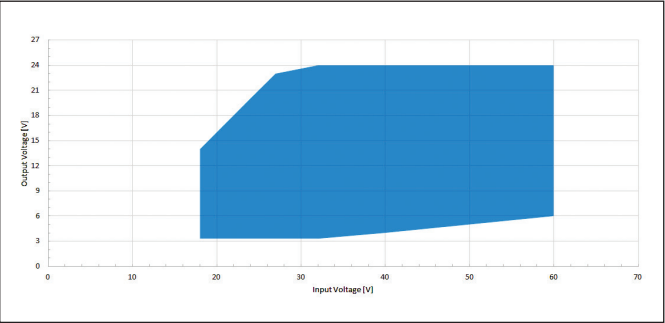


i7A24045A033V

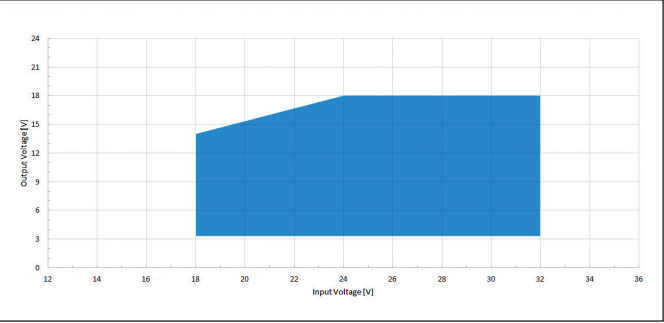

i7A12060A008V

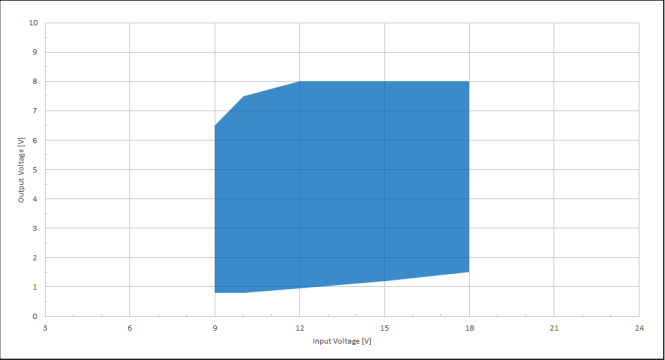


i7A48020A033V

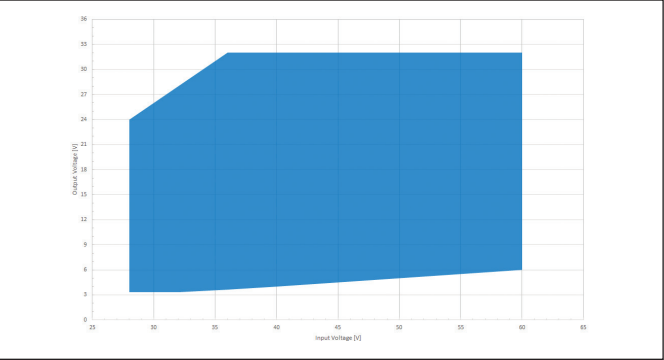


## Mechanical Specification


Outline Drawing Open frame –00x-R product options

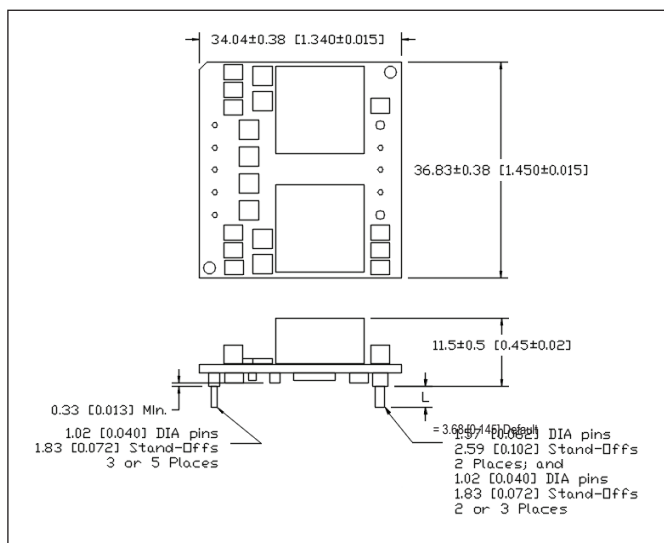

Outline Drawing With Baseplate –xCx-R product options)

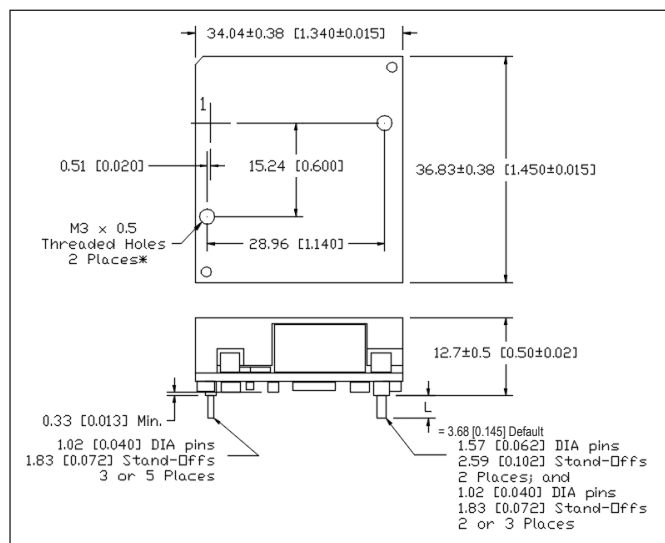


Outline Drawing With Heatsink –xFx-R product options

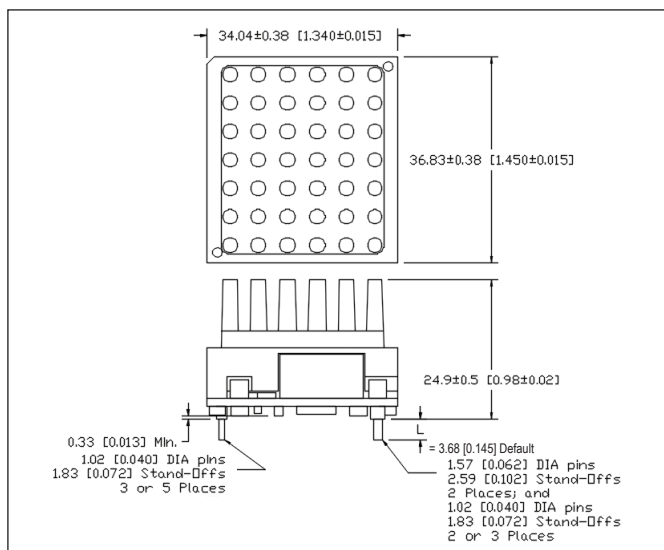

## Mechanical Specification

## Recommended Hole Pattern (Top View)

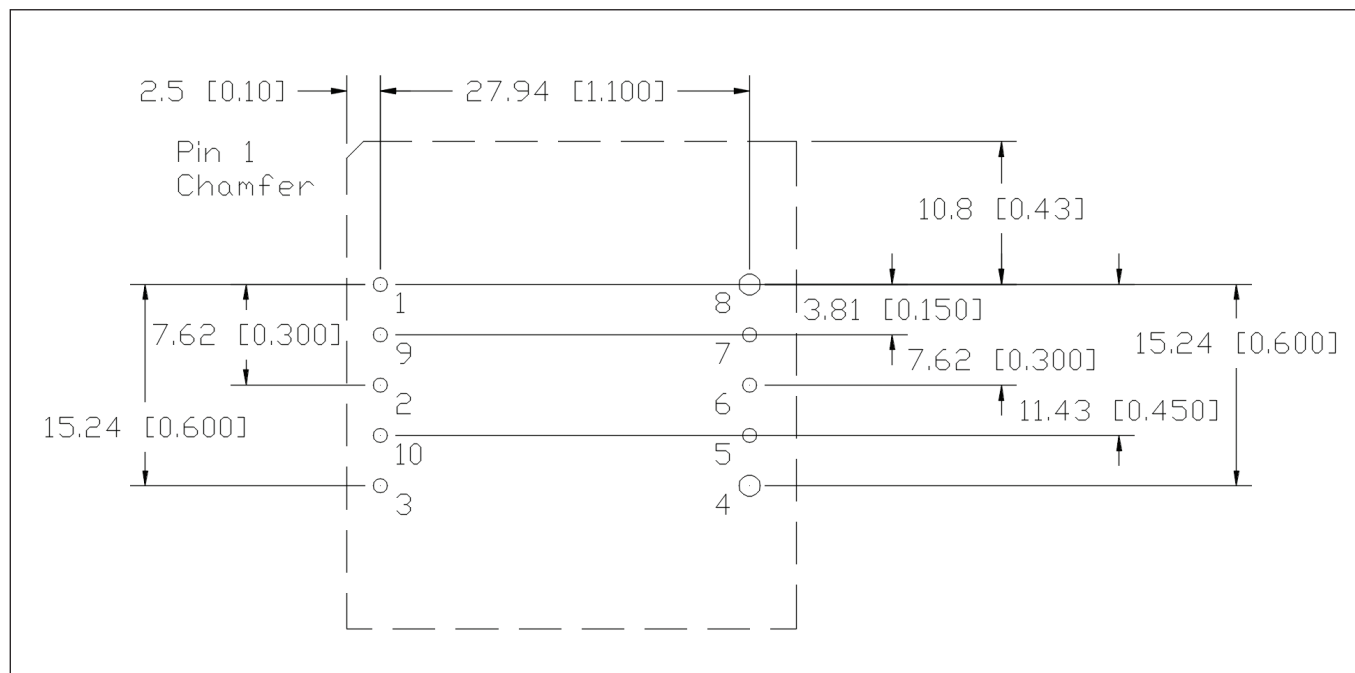

| Pinout |                                |     |               |
|--------|--------------------------------|-----|---------------|
| PIN    | FUNCTION                       | PIN | FUNCTION      |
| 1      | Vin (+)                        | 6   | TRIM          |
| 2      | On / Off                       | 7   | SENSE +       |
| 3      | Vin (-) / GND                  | 8   | Vout (+)      |
| 4      | Vout (-) / GND                 | 9*  | Vin (+)       |
| 5**    | Current Limit (OCP) Adjustment | 10* | Vin (-) / GND |

\* Pins 9 & 10 are added for products drawing higher input currents (e.g. i7A24045A033V and i7A12060A008V)

\*\* Pin 5 is only populated when this feature is present.

Pin base material is brass or copper with gold over nickel plating.



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
tlf.fr-powersolutions@tdk.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
tlf.it-powersolutions@tdk.com  
www.emea.lambda.tdk.com/it



## Netherlands

tlf.nl-powersolutions@tdk.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
tlg.powersolutions@tdk.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
tlg.at-powersolutions@tdk.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
tlg.ch-powersolutions@tdk.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
tlg.dk-powersolutions@tdk.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
tlu.powersolutions@tdk.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
tli.powersolutions@tdk.com  
www.emea.lambda.tdk.com/il-en



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
tla.powersolutions@tdk.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
tlc.powersolutions@tdk.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tls.marketing@tdk.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@tdk.com  
www.sg.lambda.tdk.com



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[I7A4W033A033V-000-R](#) [I7A4W033A033V-001-R](#) [I7A4W033A033V-0C1-R](#) [I7A4W033A033V-0F1-R](#)  
[I7A24045A033V-000-R](#) [I7A24045A033V-001-R](#) [I7A24045A033V-0C1-R](#) [I7A24045A033V-0F1-R](#) [I7A24045A033V-003-](#)  
[R](#) [I7A24045A033V-0C3-R](#) [I7A24045A033V-0F3-R](#) [I7A4W033A033V-003-R](#) [I7A4W033A033V-0C3-R](#)  
[I7A4W033A033V-0F3-R](#) [I7A12060A008V-000-R](#) [I7A12060A008V-001-R](#) [I7A12060A008V-003-R](#) [I7A12060A008V-0C1-](#)  
[R](#) [I7A12060A008V-0C3-R](#) [I7A12060A008V-0F1-R](#) [I7A12060A008V-0F3-R](#)