


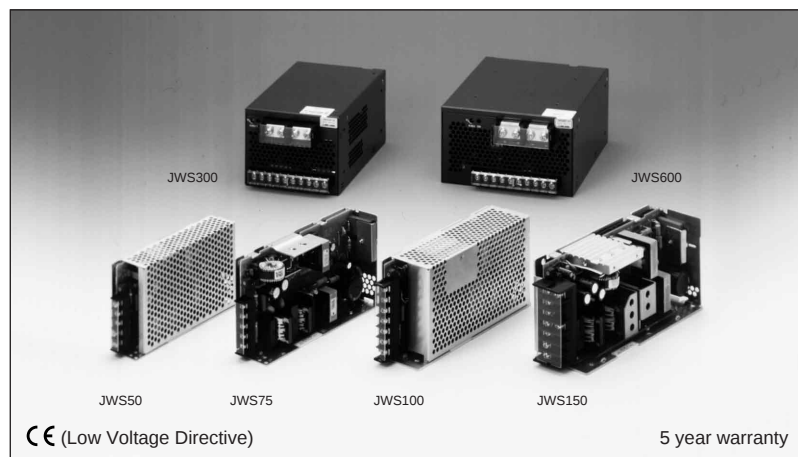

Model name

JWS 50-5/ ☐ ☐

Name of series

Nominal output voltage

Output power type

Blank: Open frame, Barrier Strip (JWS300, JWS600 with cover & Barrier Strip)
A: With cover, Barrier Strip (JWS50, JWS75, JWS100 & JWS150 only)
B: Open frame, Connector terminal (JWS50 & JWS75 only)
C: With cover, Connector terminal (JWS50 & JWS75 only)
R: With remote on/off control (JWS50 ~ JWS150)

Features

- CE marking (Low Voltage Directive)
- Wide input voltage range: Universal input 85 ~ 265VAC
- PFHC (EN61000-3-2)
- EMI (EN55011-B, EN55022-B, VCCI-B, FCC-B)
- EMC (EN61000-4-2, -3, -4, -5, -6)
- 5 year warranty

Specifications

1. Input voltage range	85 ~ 265VAC (47 ~ 63Hz), DC120 ~ 330V universal input
2. Power factor	0.99 (typ) 100VAC at full load, 0.95 (typ) 200VAC at full load
3. Cooling	JWS50 ~ JWS150: Convection cooling / JWS300 & JWS600: Forced air cooling by internal fan
4. Operating ambient temperature	JWS50 ~ JWS150: -10 ~ +60°C (Standard mounting) Output derating: 100% at -10 ~ +50°C, 60% at +60°C JWS300 ~ JWS600: 100% at -10 ~ +50°C, 60% : +60°C, 55% at +65°C
5. Withstand voltage	Input-output: 3kVAC, Input-chassis : 2kVAC, Output-chassis: 500VAC for 1 min.
6. EMI	Conforms to EN55011-B, EN55022-B, VCCI-class 2 and FCC-B
7. EMS	Conforms to EN55011-B, EN55022-B, VCCI-class 2 and FCC-B
8. PFHC	Conforms to EN61000-3-2 class D
9. Safety standard	Approved by UL1950  , CSA950  , EN60950  and VDE0160 
10. Functions	Over voltage protection, Over current protection, Remote sensing (JWS100 ~ JWS600), Remote on/off control (JWS300 ~ 600)
11. Option	Remote on/off control, Input/output connector (JWS50, 75), Cover, Mounting sheet metal


Product lineup

Model name		Nominal output voltage	Max. output current	Max. output power	UL	CSA	EN
JWS50	JWS50-3	3.3V	10A	33W	○	○	○
	JWS50-5	5V	10A	50W	○	○	○
	JWS50-12	12V	4.3A	51.6W	○	○	○
	JWS50-15	15V	3.5A	52.5W	○	○	○
	JWS50-24	24V	2.2A	52.8W	○	○	○
JWS75	JWS75-3	3.3V	15A	49.5W	○	○	○
	JWS75-5	5V	15A	75W	○	○	○
	JWS75-12	12V	6.3A	75.6W	○	○	○
	JWS75-15	15V	5.0A	75W	○	○	○
	JWS75-24	24V	3.2A	76.8W	○	○	○
JWS100	JWS100-3	3.3V	20A	66W	○	○	○
	JWS100-5	5V	20A	100W	○	○	○
	JWS100-12	12V	8.5A	102W	○	○	○
	JWS100-15	15V	7.0A	105W	○	○	○
	JWS100-24	24V	4.5A	108W	○	○	○
JWS150	JWS150-3	3.3V	30A	99W	○	○	○
	JWS150-5	5V	30A	150W	○	○	○
	JWS150-12	12V	13A	156W	○	○	○
	JWS150-15	15V	10A	150W	○	○	○
	JWS150-24	24V	6.5A	156W	○	○	○
JWS300	JWS300-2	2V	60A	120W	○	○	○
	JWS300-3	3.3V	60A	198W	○	○	○
	JWS300-5	5V	60A	300W	○	○	○
	JWS300-12	12V	27A	324W	○	○	○
	JWS300-15	15V	22A	330W	○	○	○
JWS600	JWS600-2	2V	120A	240W	○	○	○
	JWS600-3	3.3V	120A	396W	○	○	○
	JWS600-5	5V	120A	600W	○	○	○
	JWS600-12	12V	53A	636W	○	○	○
	JWS600-15	15V	43A	645W	○	○	○
JWS600	JWS600-24	24V	27A	648W	○	○	○
	JWS600-48	48V	13A	624W	○	○	○

- Request customer specification for further details of specification, outline, characteristics, etc. Read the instruction manual before usage.
- Contact us about delivery before ordering.


○ : Safety standard approved
△ : Conforms to safety standard

■ JWS50 (50W type)

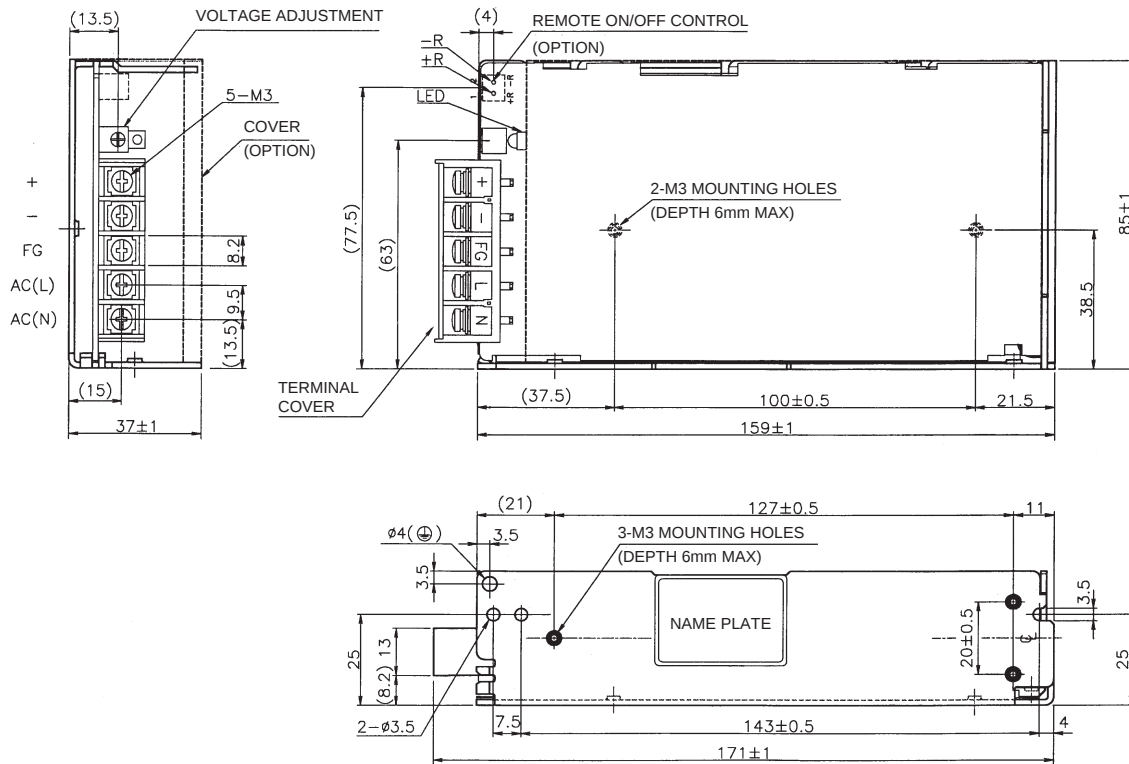


(Unit: mm)

■ JWS50 (50W connector type)

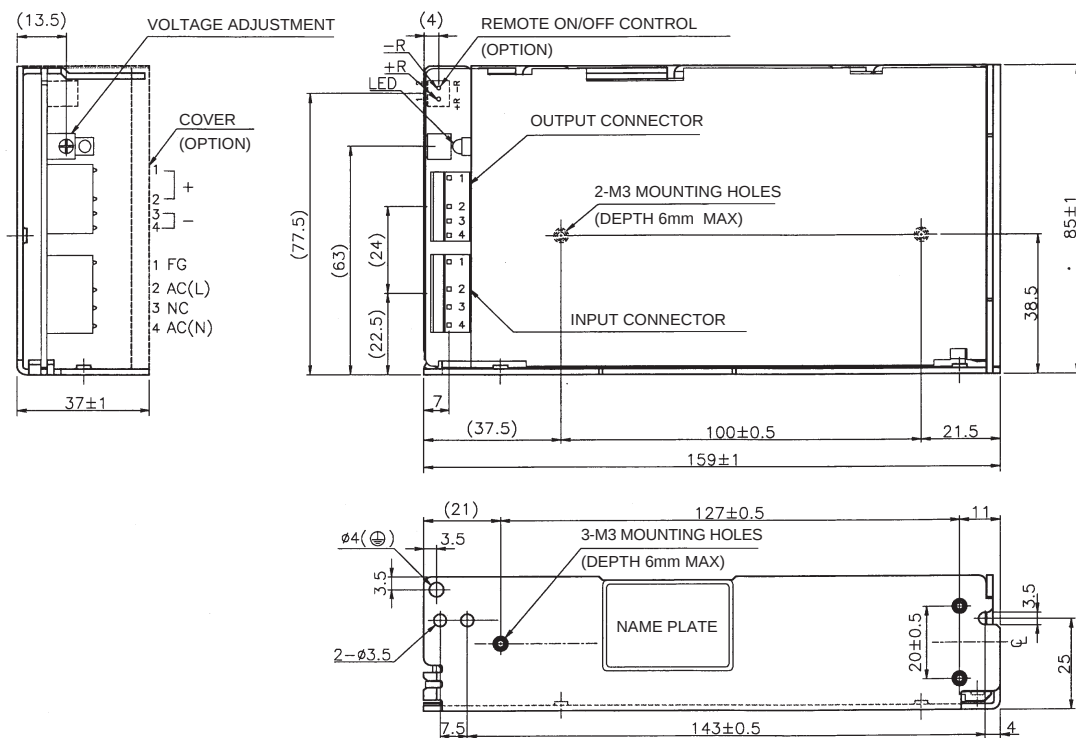


(Unit: mm)


■ JWS75 (75W type)

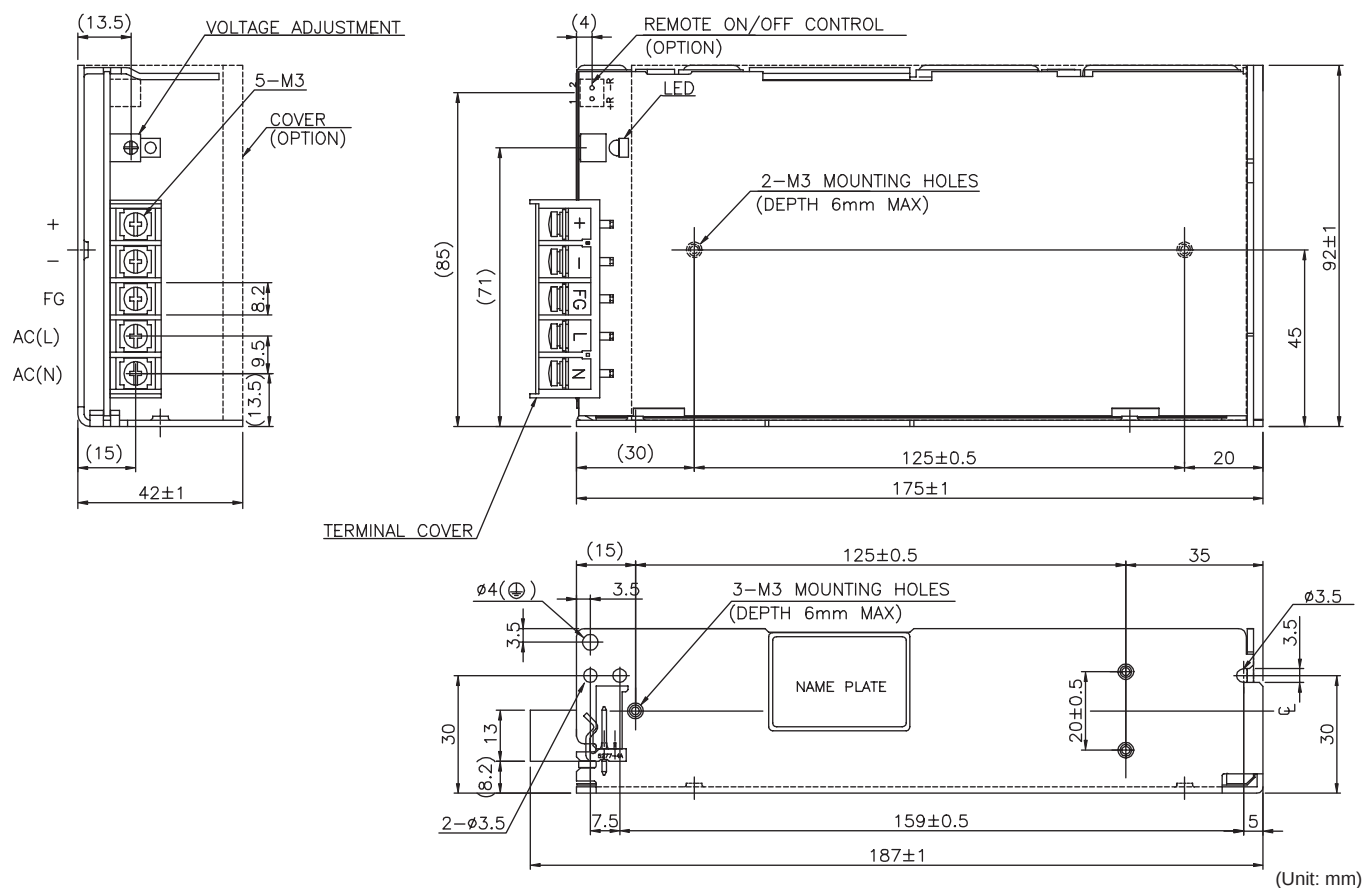

■ JWS75 (75W connector type)

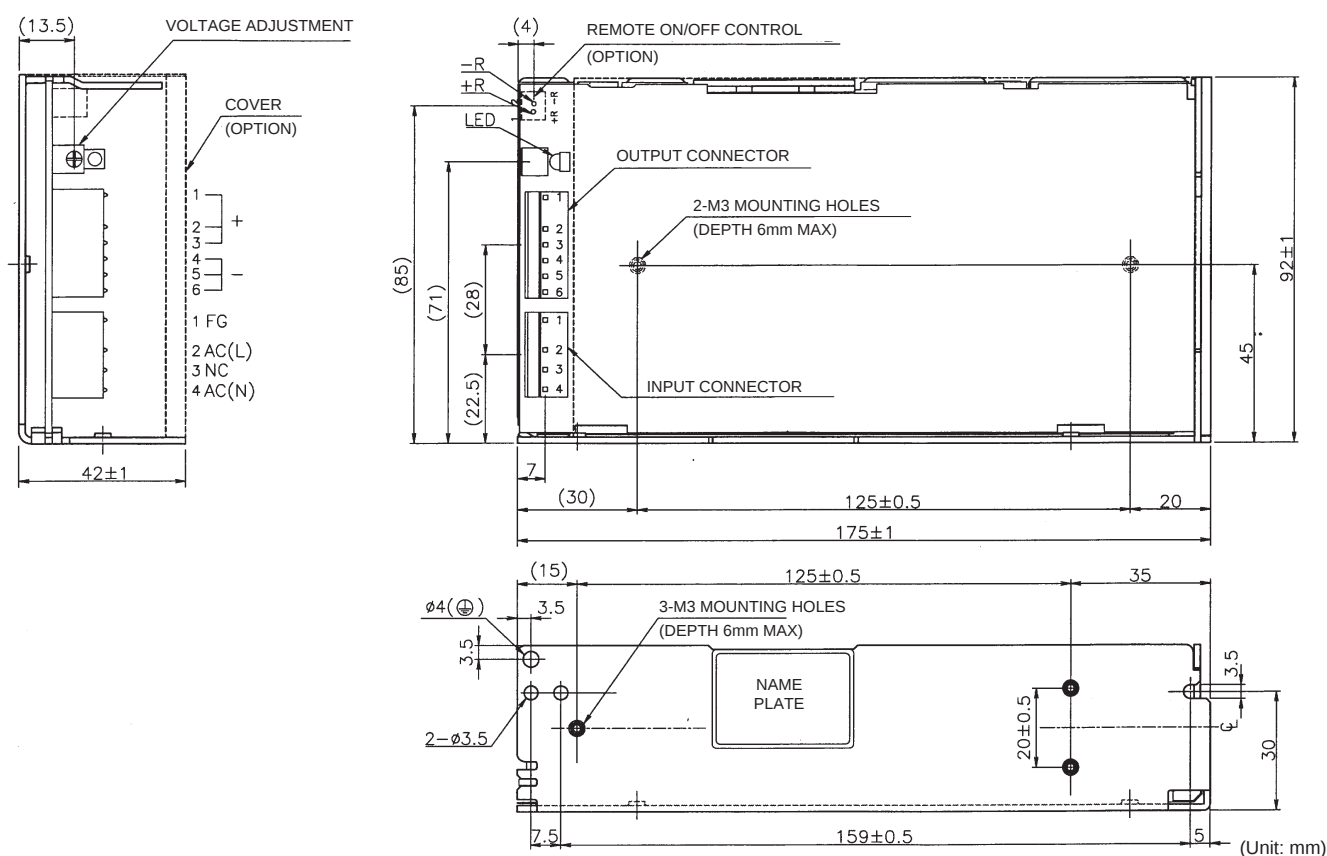


■ JWS100 (100W type)

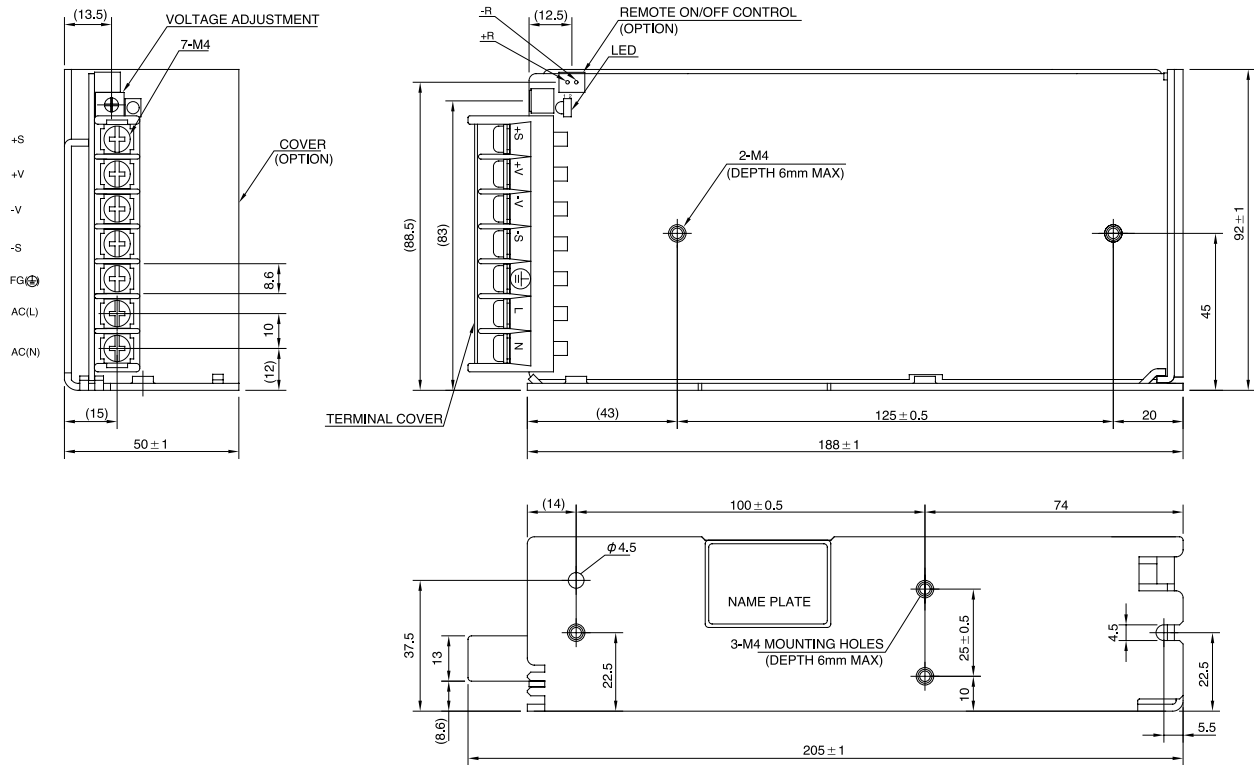



(Unit: mm)

■ JWS150 (150W)

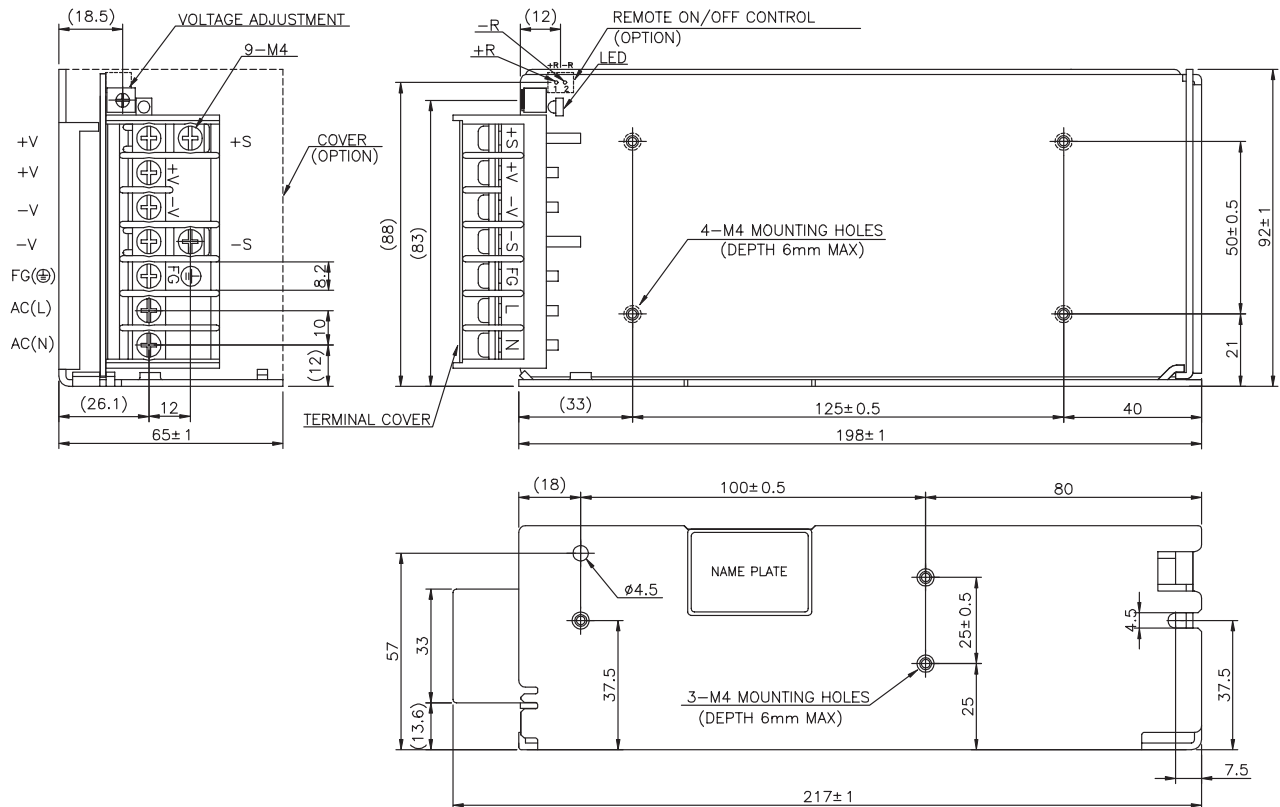

(Unit: mm)



■ JWS300 (300W type)

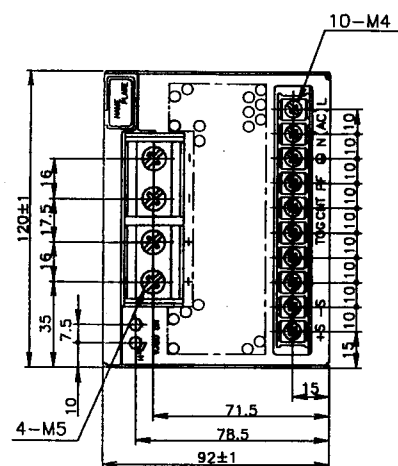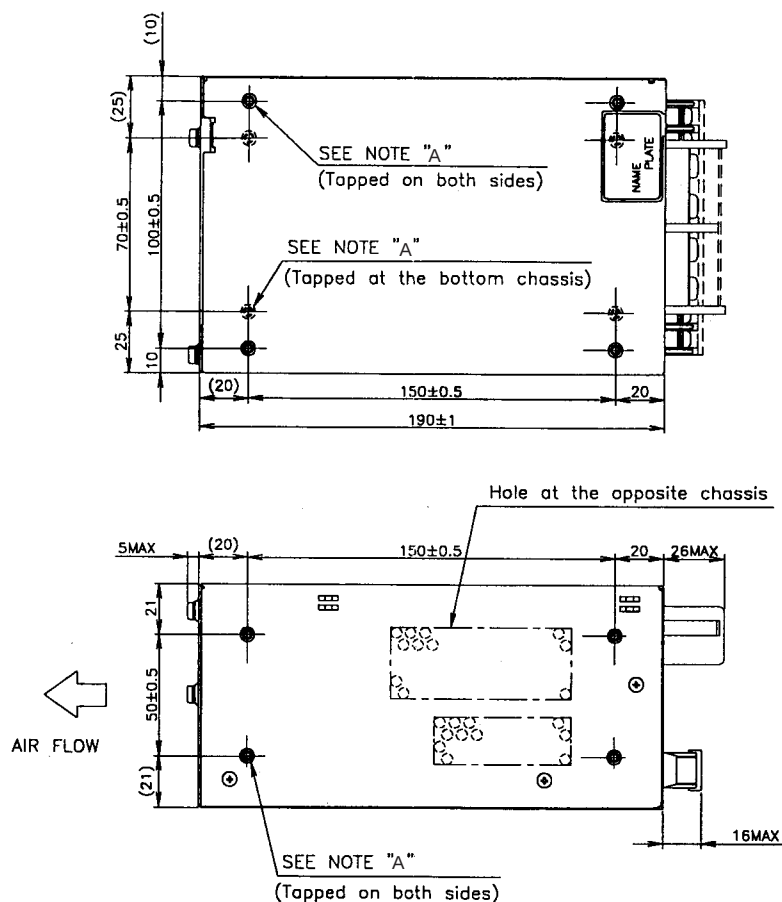

NOTE A: M4 tapped holes (20) for customer chassis mounting.
[Screws must not protrude into power supply by more than 6m/m.]

(Unit: mm)

■ JWS600 (600W)

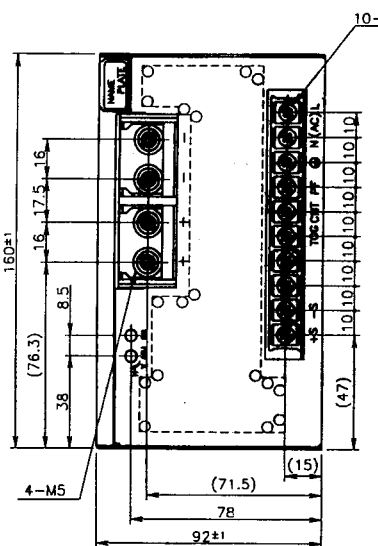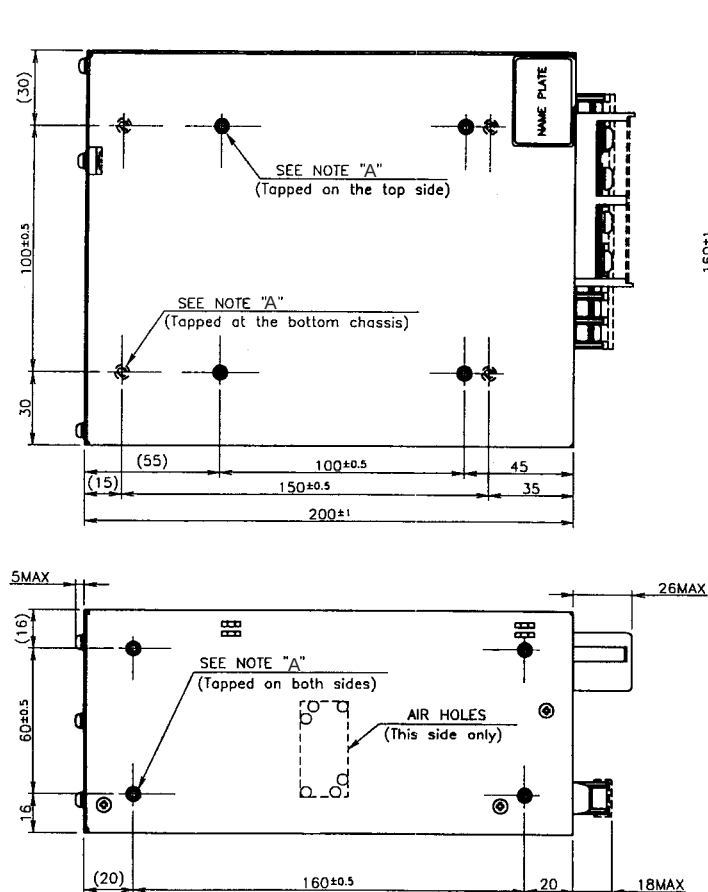

NOTE A: M4 tapped holes (16) for customer chassis mounting.
[Screws must not protrude into power supply by more than 6m/m.]

(Unit: mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK-Lambda:

[JWS100-15](#) [JWS100-24/R](#) [JWS100-3](#) [JWS100-3/R](#) [JWS100-48/RA](#) [JWS100-5/R](#) [JWS150-12/R](#) [JWS150-15/R](#)
[JWS150-24/R](#) [JWS150-3](#) [JWS150-3/R](#) [JWS150-3/RA](#) [JWS150-48/R](#) [JWS150-48/RA](#) [JWS150-5](#) [JWS150-5/R](#)
[JWS50-12/B](#) [JWS50-12/RB](#) [JWS50-12/RC](#) [JWS50-15/C](#) [JWS50-15/RA](#) [JWS50-15/RB](#) [JWS50-24/R](#) [JWS50-24/RB](#)
[JWS50-24/RC](#) [JWS50-3](#) [JWS50-3/B](#) [JWS50-3/C](#) [JWS50-3/R](#) [JWS50-48/B](#) [JWS50-48/C](#) [JWS50-48/RA](#) [JWS50-](#)
[48/RB](#) [JWS50-5/B](#) [JWS50-5/R](#) [JWS50-5/RB](#) [JWS50-5/RC](#) [JWS75-12](#) [JWS75-12/B](#) [JWS75-12/C](#) [JWS75-12/R](#)
[JWS75-12/RA](#) [JWS75-12/RB](#) [JWS75-12/RC](#) [JWS75-15/B](#) [JWS75-15/R](#) [JWS75-24/B](#) [JWS75-24/C](#) [JWS75-24/R](#)
[JWS75-24/RA](#) [JWS75-24/RC](#) [JWS75-3](#) [JWS75-3/B](#) [JWS75-3/RA](#) [JWS75-48](#) [JWS75-48/C](#) [JWS75-48/RA](#) [JWS75-5](#)
[JWS75-5/B](#) [JWS75-5/C](#) [JWS75-5/RB](#)