

Suspended Substrate Stripline Filters and Multiplexers

50Ω

DC to 26 GHz

The Big Deal

- Low insertion loss
- Ultra-wide passband width
- Fast roll-off with wide stopband
- Good power handling and temperature stability
- Passband up to 26 GHz
- Stopband up to 26.5 GHz can extend to 40 GHz



Product Overview

Mini-Circuits' Suspended Substrate Stripline filters offer low insertion loss by implementing printed circuit board suspended between two parallel ground planes, providing high Q. Low insertion loss combined with wide stop-band makes them an excellent choice for wideband instruments and systems like ECM, ECCM, ELINT and ultra-broadband receivers.

Low pass, high pass, band pass, band stop, diplexer and multiplexer designs can be realized with this technology. Advanced filter design and construction can achieve stopband width greater than 6x the center frequency, and temperature stability will be better than other printed circuit realizations because the fields are mainly in the air rather than in a dielectric. The inside walls of the housing hold the circuit and prevent movement that could be caused by vibration or mechanical shock, making these designs excellent candidates for harsh operating environments.

Suspended substrate stripline filters can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitters
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide, spur-free stop band results in better receiver sensitivity
High power handling	Well suited for transmitter applications
Excellent temperature stability	Ensures minimal variation in electrical performance across temperature

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Suspended substrate stripline Band Pass Filter

50Ω 1600 to 2900 MHz

ZBSS-2250-S+



Features

- Wider fractional Bandwidth design of 58%
- 1dB Insertion Loss at f_c , 2250MHz
- Sharper Rejection ~45dB within 10% of the Passband edge
- 100dB Rejection at lower frequency of <1000 MHz

Applications

- Defense
- Broadband receivers
- Wireless communication system

Generic photo used for illustration purposes only
CASE STYLE: VC3115

Connectors Model
SMA-F ZBSS-2250-S+

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	F1-F2	1600 - 2900	-	2.5	dB
	VSWR	F1-F2	1600 - 2900	-	1.67	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 1170	40	50	dB
		F3-F4	1170 - 1300	20	30	dB
Stop Band, Upper	Insertion Loss	F5-F6	3250 - 3500	20	30	dB
		F6-F7	3500 - 6000	-	35	dB

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	3W max. @25°C

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic



Typical Frequency Response




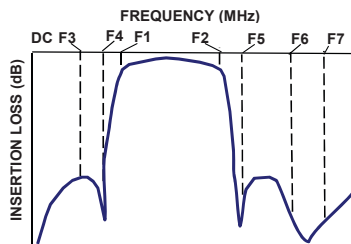


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	104.46	34331.58	1600	2.73
100	107.73	3481.32	1700	2.16
600	104.86	168.69	1800	1.85
1170	56.33	42.63	1900	1.65
1300	34.26	27.01	1950	1.58
1320	30.62	24.47	2000	1.51
1370	21.09	16.74	2050	1.46
1480	3.01	1.60	2100	1.41
1600	1.44	1.13	2200	1.34
1900	0.93	1.03	2250	1.32
2250	0.87	1.25	2300	1.30
2600	0.94	1.21	2400	1.29
2900	1.56	1.26	2450	1.29
2990	3.20	1.84	2500	1.30
3060	10.15	5.24	2550	1.31
3120	20.47	8.80	2600	1.33
3160	29.61	10.67	2650	1.37
3250	39.56	14.72	2700	1.42
3500	58.06	27.20	2800	1.60
6000	74.95	69.99	2900	2.02

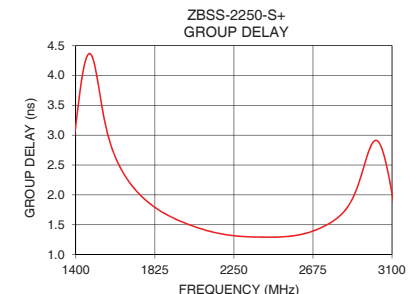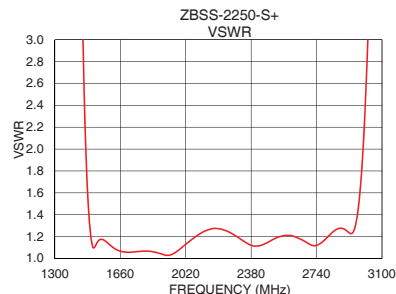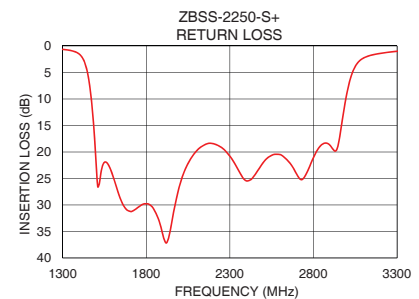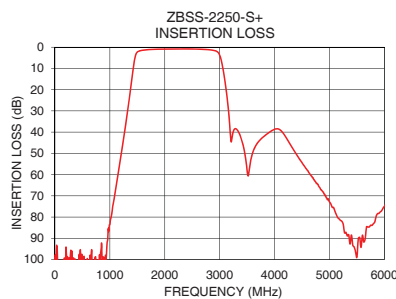

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.A
ECO-009769
ZBSS-2250-S+
EDU4076
URJ
210921
Page 2 of 3

Coaxial Connections

PORT - 1	SMA FEMALE
PORT - 2	SMA FEMALE

Outline Drawing

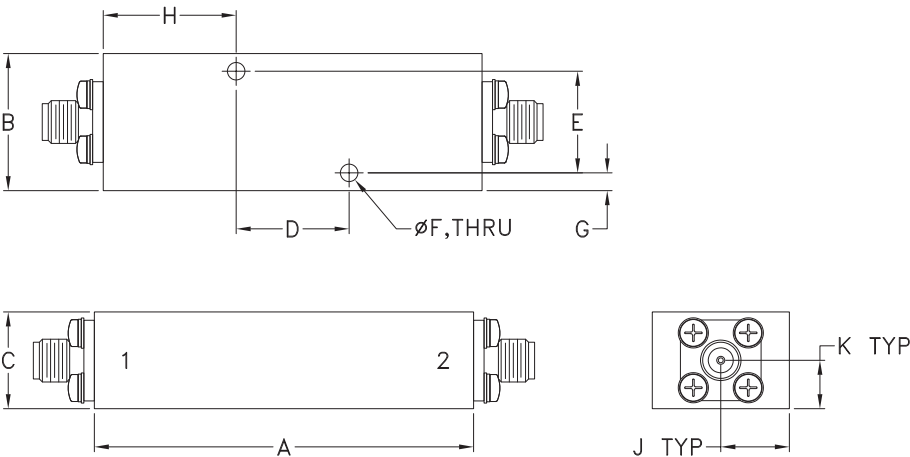

Outline Dimensions (inch mm)

A	B	C	D	E	F
2.35	.85	.60	.700	.630	.110
59.7	21.6	15.2	17.78	16.00	2.80
G	H	J	K	Wt.	
.11	.82	.43	.30	grams	
2.8	20.9	10.8	7.6	140	

Note: Please refer to case style drawing for details

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZBSS-2250-S+](#)