

TPD1060F


High-Side Switch for Motor, Solenoid and Lamp Drive

The TPD1060F is a monolithic power IC for high-side switches.

The IC has a P channel MOSFET (D-MOS) output which can be directly driven from a CMOS or TTL logic circuit (e.g., an MPU). The IC is equipped with intelligent self-protection functions.


Features

- A monolithic power IC with a new structure combining a control block (Bi-CMOS) and a power MOSFET (D-MOS) on a single chip.
- One side of load can be grounded to a high-side switch.
- Can directly drive a power load from a CMOS or TTL logic.
- Built-in protection circuits against load short-circuiting, over temperature (thermal shutdown).
- Incorporates a diagnosis function that allows diagnosis output to be read externally at load short-circuiting, opening, or over temperature.
- The counter electromotive force due to the inductance load to the output terminal can be applied to $V_{OUT} \geq V_{DD}-40\text{ V}$.
- Low Supply voltage: $V_{DD(opr)} = 4\text{ V (Min)}$
- Low Drain-Source ON-resistance:
 $R_{DS(ON)} = 0.12\ \Omega\text{ (Max)}\text{ (@ }V_{DD}=8\text{ to }18\text{ V, }T_j = 25^\circ\text{C, }I_O = -1\text{ A, }V_{IN} = 5\text{ V)}$
- "SOP-8" package with embossed-tape packing.

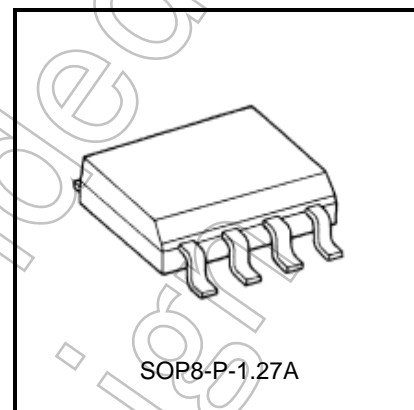


Weight: 0.08 g (Typ.)

Pin Assignment (top view)

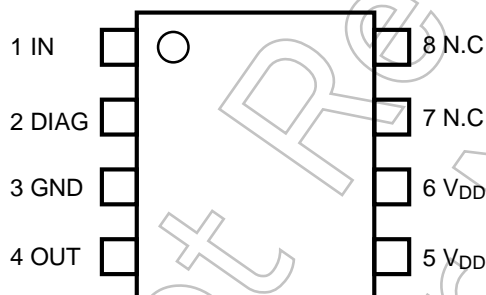

Due to its MOS structure, this product is sensitive to static electricity.

Marking



Part No. (or abbreviation code)

Lot No.

Note 1: A line under a Lot No. identifies the indication of product Labels.

Underlined: [[G]]/RoHS COMPATIBLE or [[G]]/RoHS[[Pb]]

● on the lower left of the marking indicates Pin 1

*Lot No. : (Three digits)



Week of manufacture


Year of manufacture
(The last digit of the calendar year)

Note 1: Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. The RoHS is the Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain. Hazardous substances in electrical and electronic equipment.

Start of commercial production

2016-3


Block Diagram

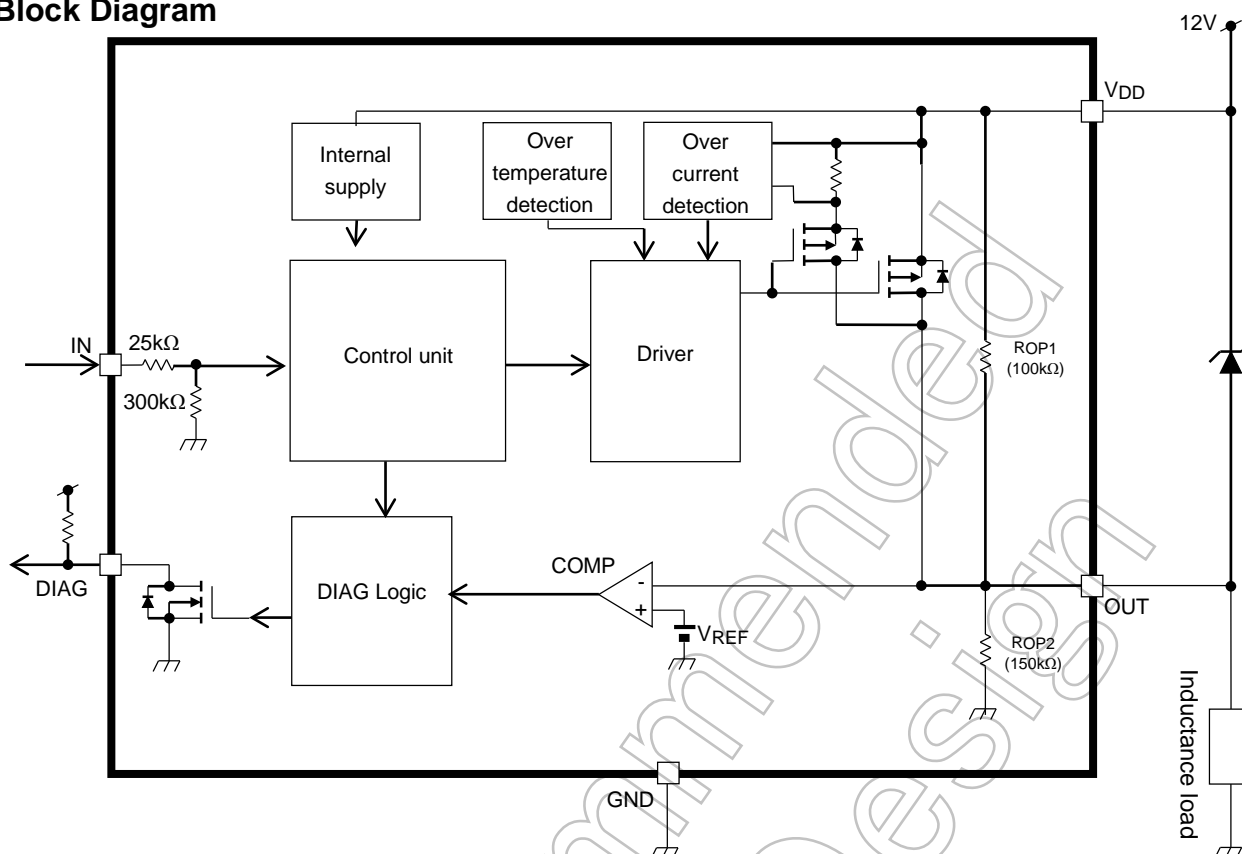

Pin Description

Pin No.	Symbol	Pin Description
1	IN	Input pin. The IN pin has an internal pull-down resistor. Even if the IN pin is open, the output will not accidentally turn on.
2	DIAG	Self-diagnosis detection pin. Load open, overcurrent and overheating are diagnosed. Circuit configuration is the N channel open Drain.
3	GND	Ground pin.
4	OUT	Output pin. When a load short-circuit causes an overcurrent 3.0 A (Min) to flow into a device, output current is limited in order to protect the IC.
5,6	V _{DD}	Power supply pin.
7,8	N.C	No-Connect pin. (not connected to the chip.)

Timing chart

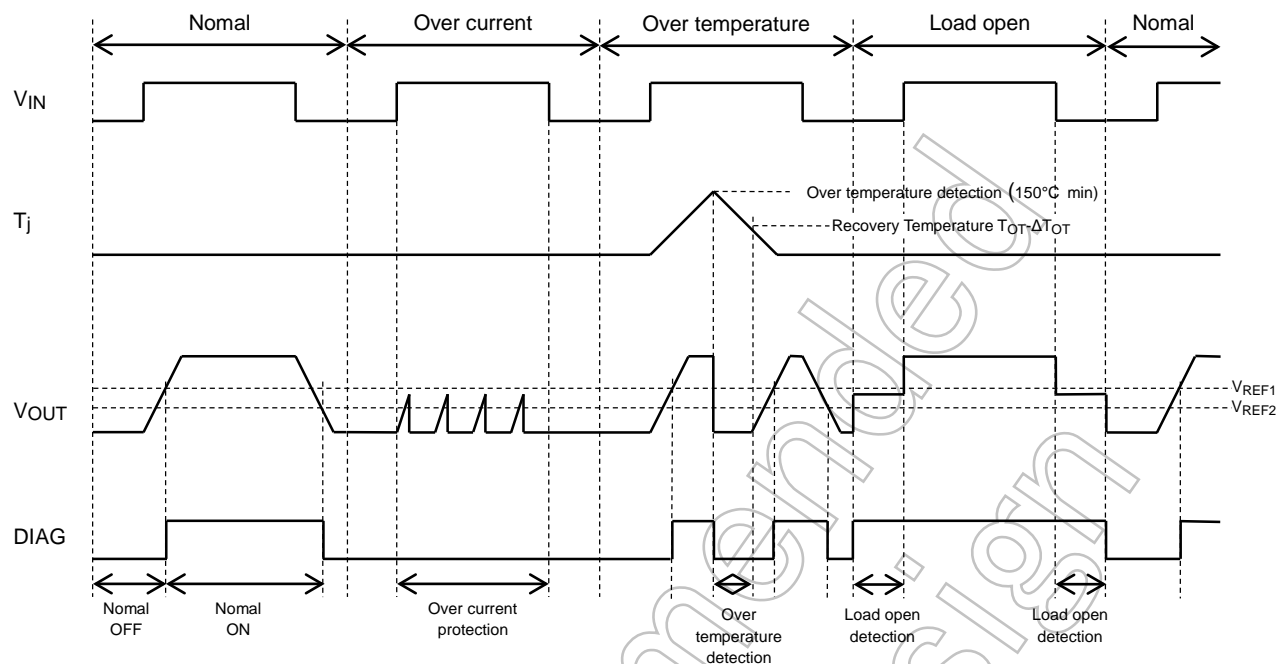

Truth table

IN	VOUT	Output state	DIAG	Operating state
L	L	OFF	L	Normal
H	H	ON	H	
L	H(Note 2)	OFF	H	Load open
H	H	ON	H	
L	L	OFF	L	Overcurrent
H	L	Current limit (Switching)	L	
L	L	OFF	L	Over temperature
H	L	OFF	L	

Note 2: Voltage determined with product internal resistance (R_{OP1} and R_{OP2}) and the external resistance between OUT –GND pin.

Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit	Remarks
Drain-source voltage		V _{DS}	40	V	P channel MOSFET
Supply voltage	DC	V _{DD(1)}	-0.3 to 25	V	
	Pulse	V _{DD(2)}	40	V	t ≤ 0.3s @ V _{DD} >25V
Input voltage	DC	V _{IN(1)}	-0.3 to 6	V	
Diagnosis output voltage		V _{DIAG}	-0.3 to 6	V	
Output voltage		V _{OUT}	(V _{DD} -40) to (V _{DD} +0.3)	V	
Output current	DC	I _{O(1)}	-3	A	
	Pulse	I _{O(2)}	internally limited	A	t ≤ 100μs @ I _O <-3A
Diagnosis output current		I _{DIAG}	5	mA	
Power dissipation		P _{D(1)}	0.9	W	(Note 3-a)
		P _{D(2)}	0.523	W	(Note 3-b)
Operating temperature		T _{opr}	-40 to 125	°C	
Junction temperature		T _j	150	°C	
Storage temperature		T _{stg}	-55 to 150	°C	

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.


Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Thermal Resistance

Characteristics	Symbol	Rating	unit
Thermal resistance, junction to ambient	R _{th(j-a)}	138.0 (Note 3-a)	°C / W
		239.0 (Note 3-b)	


Note 3:

(Note 3-a) Glass epoxy board



Glass epoxy board
Material: FR-4
25.4mm×25.4mm×0.8mm

(Note 3-b) Glass epoxy board



Glass epoxy board
Material: FR-4
25.4mm×25.4mm×0.8mm

Electrical Characteristics (Unless otherwise specified, T_j = -40 to 125°C, V_{DD} = 5 to 18V)

Characteristics		Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Operating supply voltage		V _{DD(opr)}	-	-	4.0	-	18.0	V
Output negative voltage		V _{OUT(neg)}	-	V _{IN} = V _{IL}	V _{DD} -40	-	-	V
High-level Input voltage		V _{IH}	-	V _{DD} =4 to 18V	3.5	-	-	V
Low-level Input voltage		V _{IL}	-	V _{DD} =4 to 18V	-	-	1.5	V
Supply current		I _{DD(off)}	-	V _{IN} = V _{IL} , OUT open	-	1.1	2.5	mA
		I _{DD(on)}	-	V _{IN} = V _{IH} , OUT open	-	1.2	3.0	mA
Input current		I _{IN(1)}	-	V _{IN} =5V	-	18	50	μA
		I _{IN(2)}	-	V _{IN} =0V	-1	-	1	μA
Drain-source ON-resistance		R _{DS(ON)}	-	V _{DD} =8 to 18V, I _O =-1A, T _j =25°C, V _{IN} =V _{IH}	-	0.07	0.12	Ω
			-	V _{DD} =8 to 18V, I _O =-1A, T _j =125°C, V _{IN} =V _{IH}	-	-	0.19	Ω
Output leakage current		I _{OL}	-	V _{IN} =V _{IL} , V _{OUT} =0V	-500	-180	-	μA
Diagnosis output voltage	" L " revel	V _{DL}	-	I _{DIAG} =1mA	-	0.27	0.40	V
Diagnosis output leakage current	" H " revel	I _{DH}	-	V _{DIAG} =5V	-	-	10	μA
Over current detection		I _{OC}	-	V _{IN} =V _{IH} , V _{DD} =5 to 18V	-9.0	-5.4	-3.0	A
			-	V _{IN} =V _{IH} , V _{DD} =4 to 5V	-	-5.3	-	A
Over current protection off time		Short-T _{off}	-	V _{DD} =12V, R _L =0.1Ω, T _j =25°C	3.3	8.0	15.0	ms
Over temperature detection	Temperature	T _{OT}	-	V _{IN} =V _{IH} , V _{DD} =5 to 18V	150	170	200	°C
			-	V _{IN} =V _{IH} , V _{DD} =4 to 5V	-	170	-	°C
	Hysteresis	ΔT _{OT}	-	V _{IN} =V _{IH} , V _{DD} =4 to 18V	-	5	-	°C
Load open threshold resistance		R _{OP}	-	V _{IN} =V _{IL} , V _{DD} =5 to 18V	0.5	12.4	100.0	kΩ
			-	V _{IN} =V _{IL} , V _{DD} =4 to 5V	-	120	-	kΩ
Switching time		t _{ON}	1	V _{DD} =12V, R _L =10Ω, T _j =25°C	-	20	50	μs
		t _{OFF}			-	20	50	μs
		t _{ON}		V _{DD} =4V, R _L =10Ω, T _j =25°C	-	20	-	μs
		t _{OFF}			-	20	-	μs

Note: Typical characteristic conditions are V_{DD}=12V, T_j=25°C.

Typical characteristic conditions (V_{DD}=4 to 5V) are V_{DD}=4V, T_j=25°C.



Note: Polarity of the current "-" is the current from the product to the outside.

Precautions for use:







Although this product contains the negative voltage bias protection circuit of an Output pin, don't build in the inductive load energy absorption circuit. Please connect a regeneration element (diode) outside at any cost at the time of inductive load use, such as a solenoid operated valve.







Test Circuit 1






Switching time t_{ON} , t_{OFF}




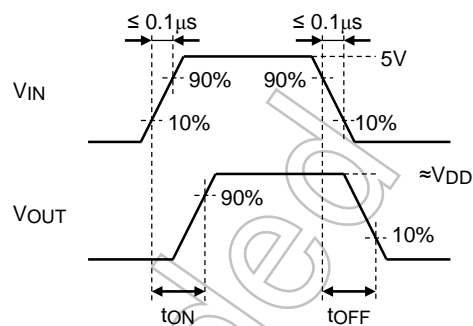
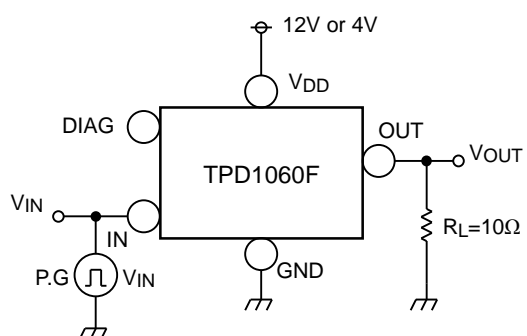



Not Recommended for New Design

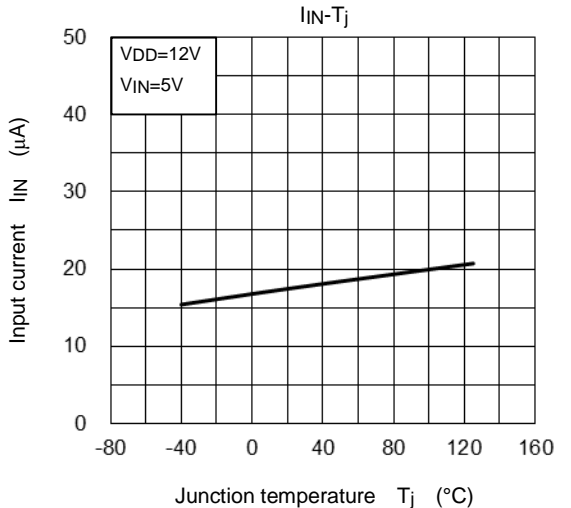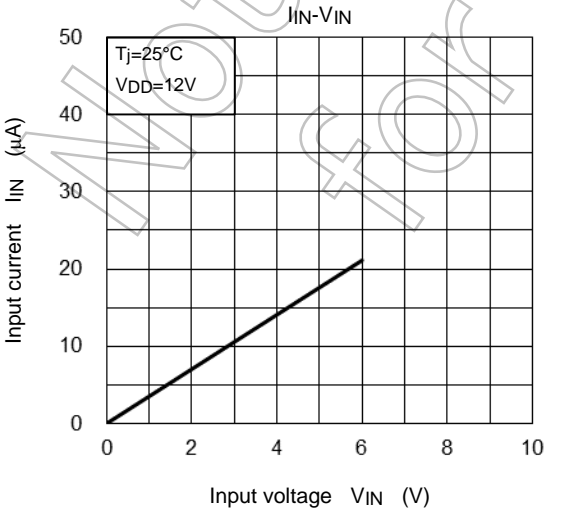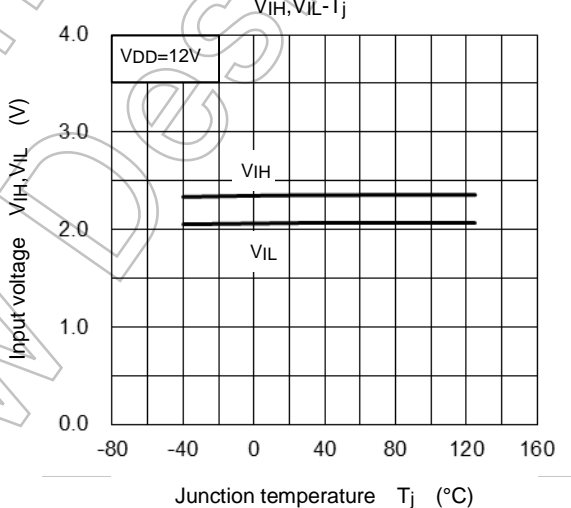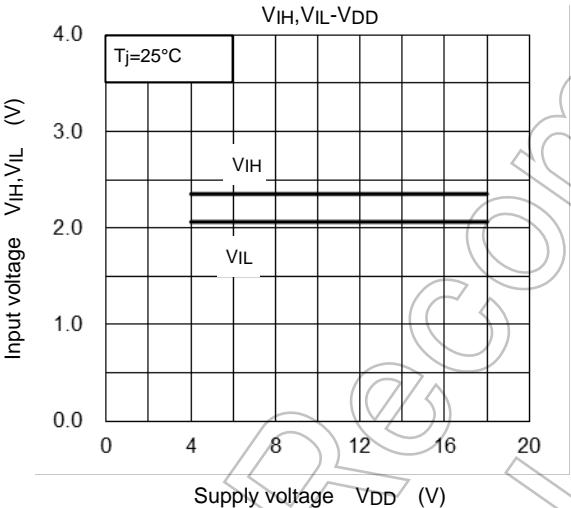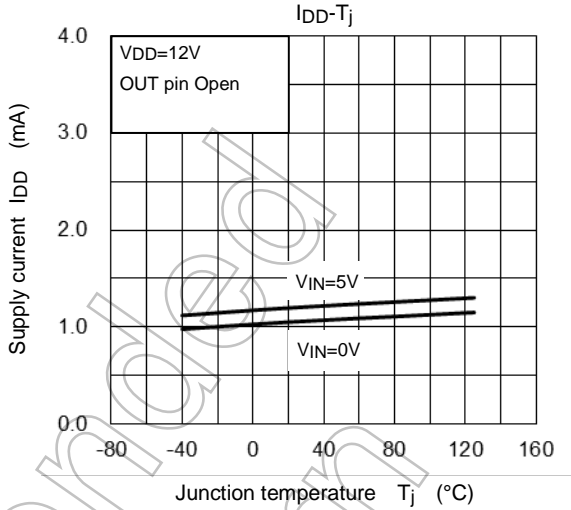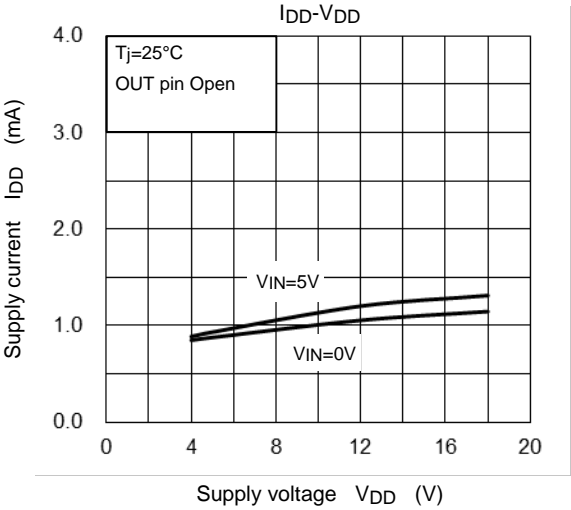

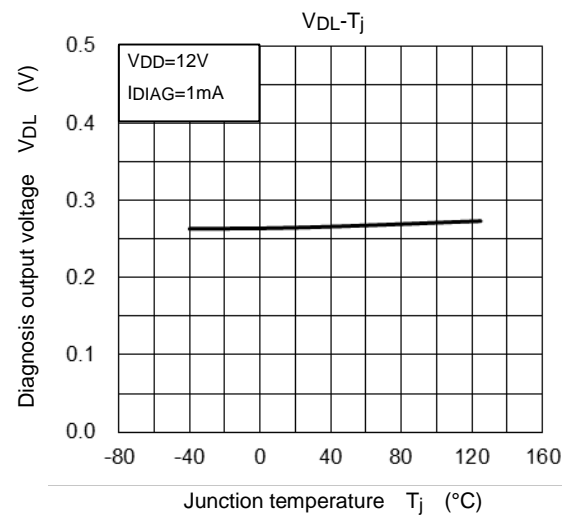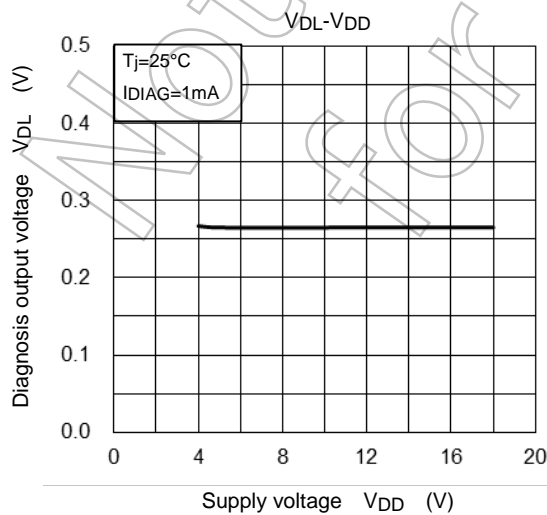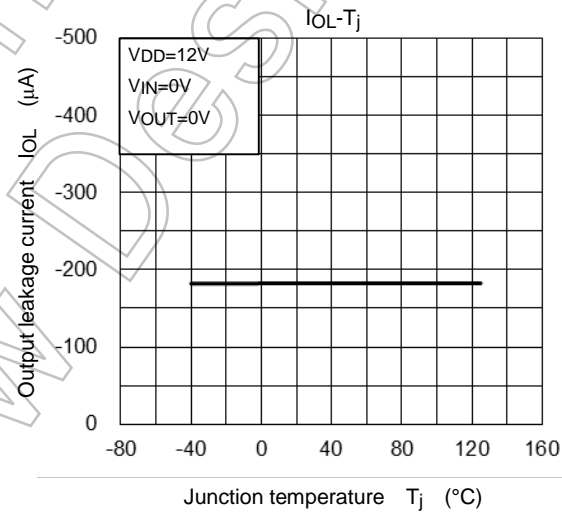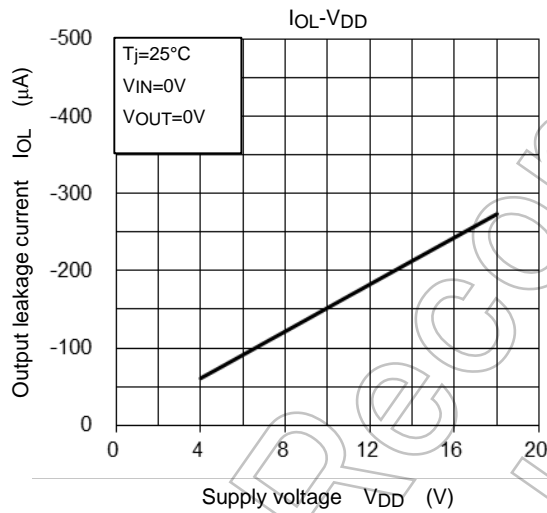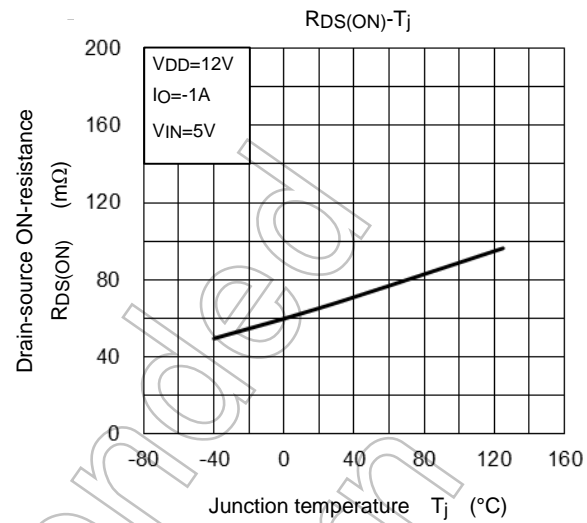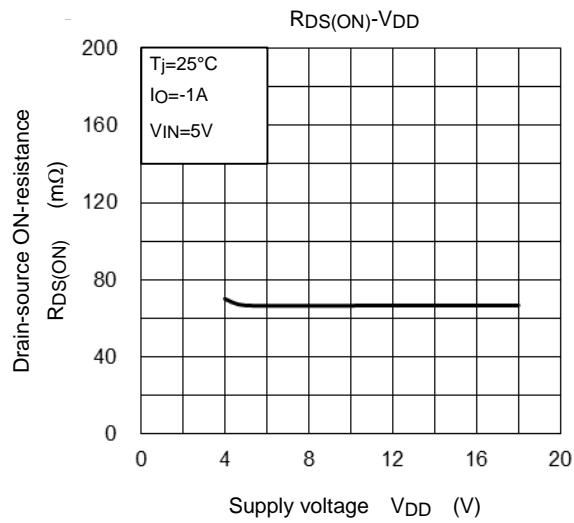


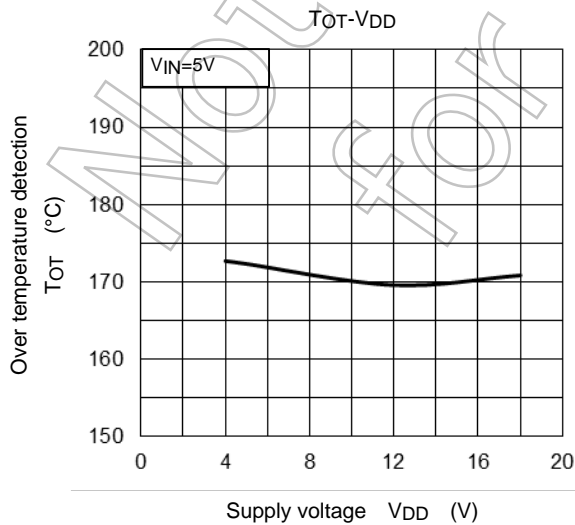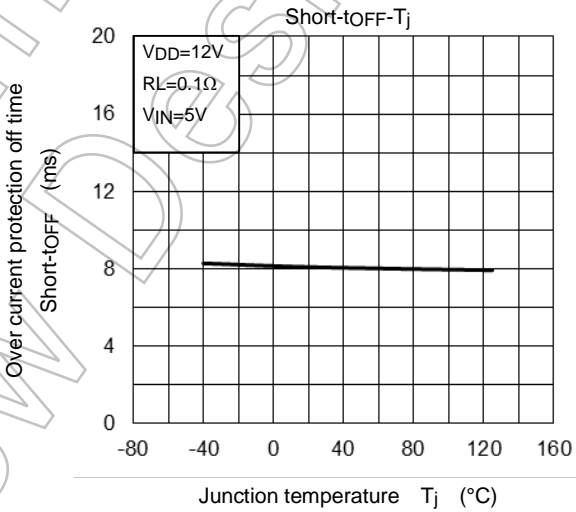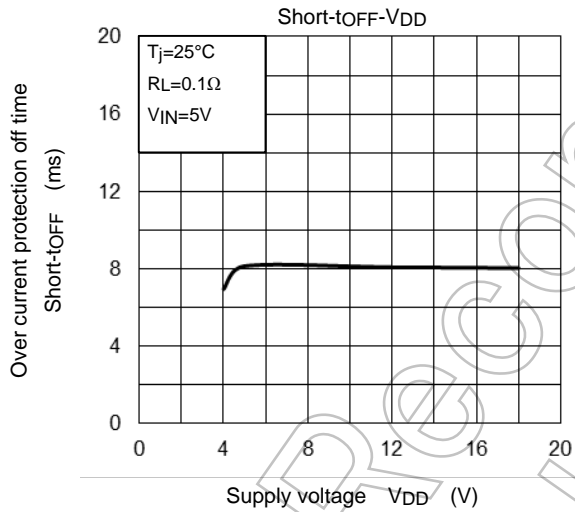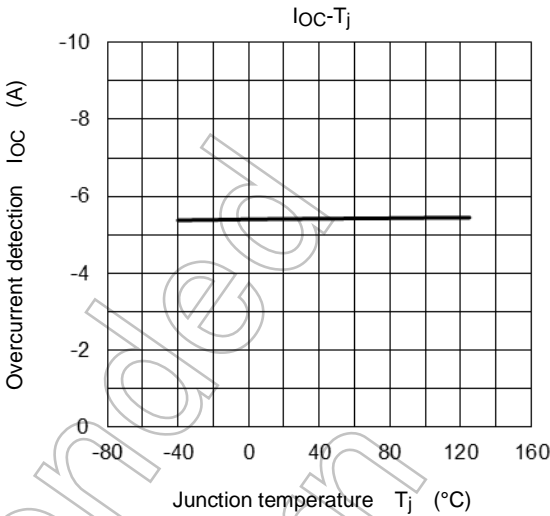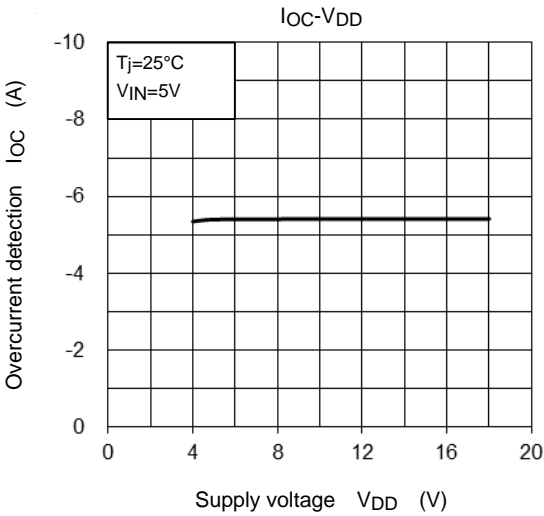

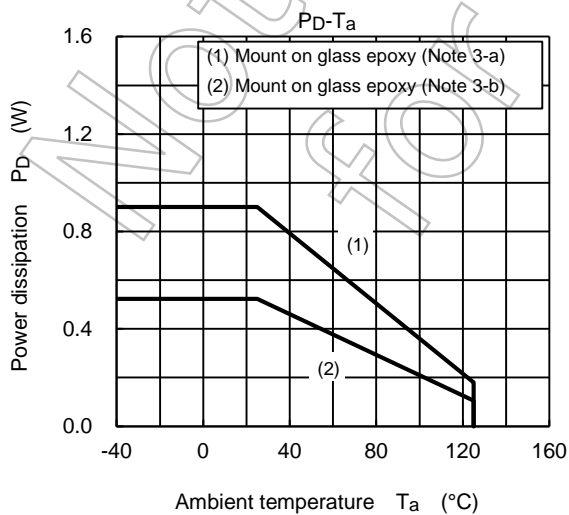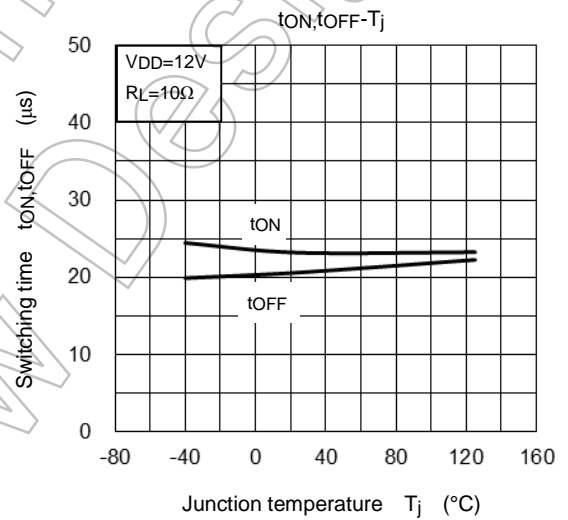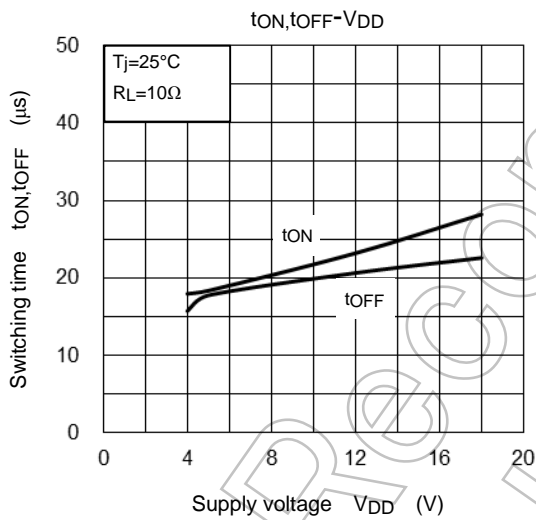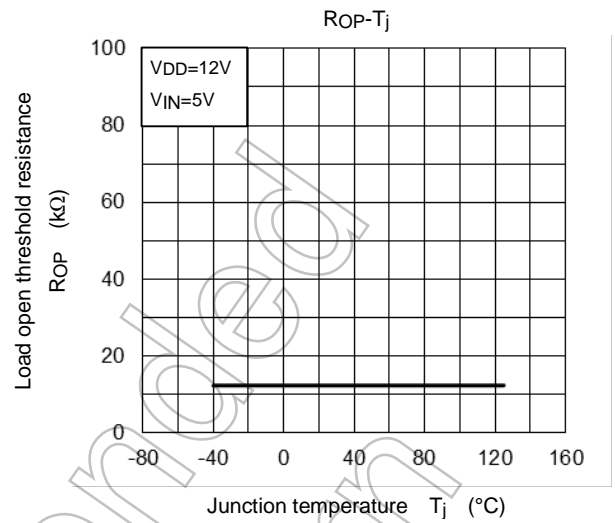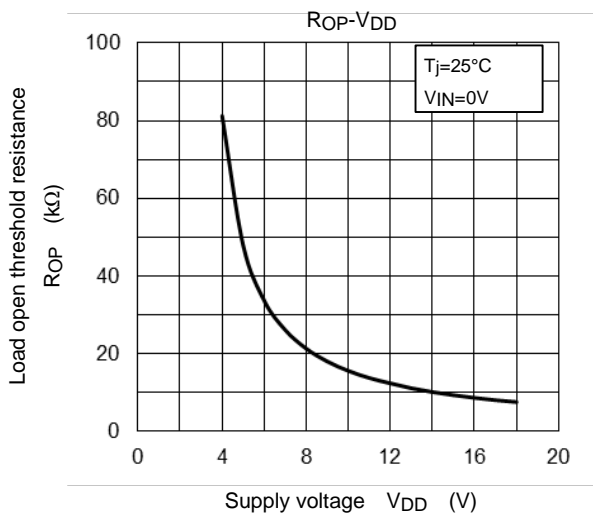

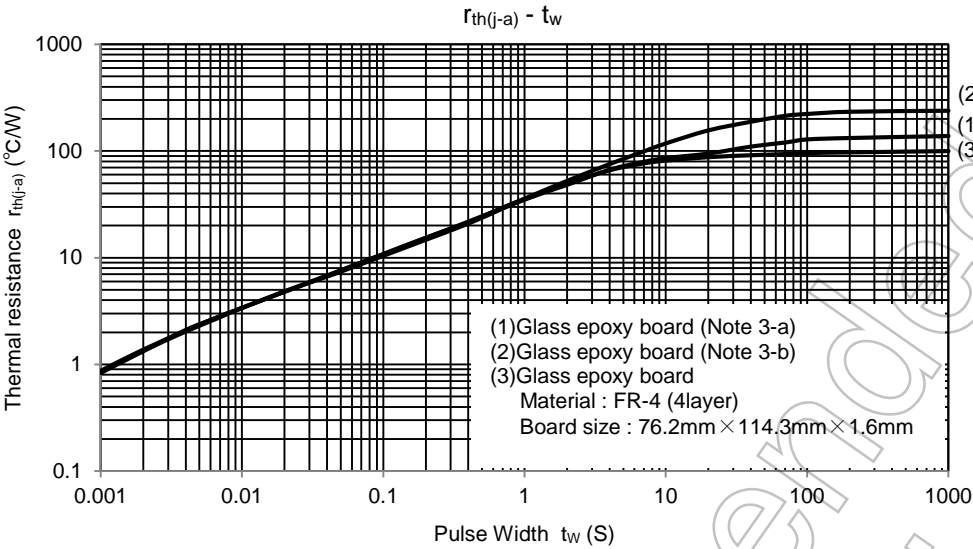

Package Dimensions

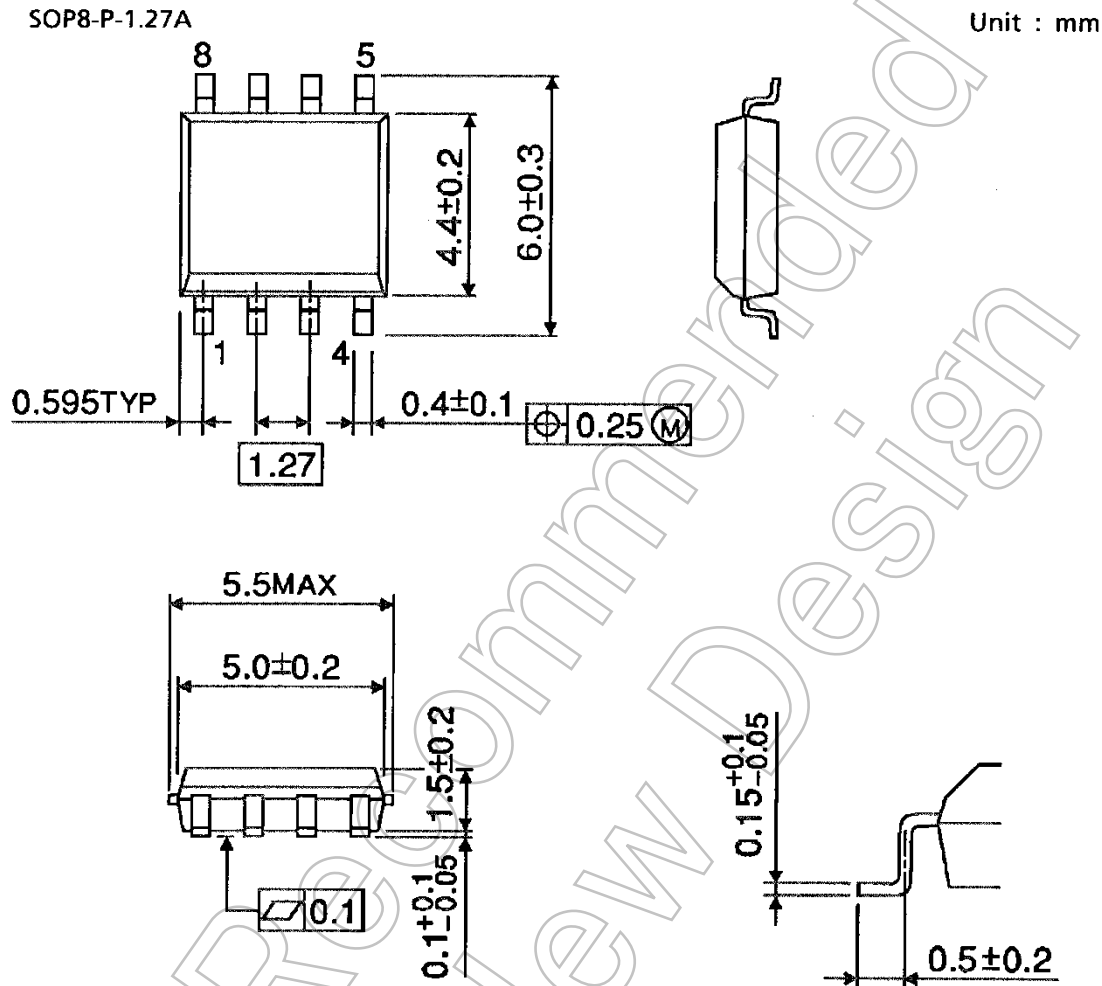

Weight: 0.08 g (Typ.)

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Toshiba:

TPD1060F,LMCQ(O