



Switchmode/ High Frequency Rod Core Inductors

FIRCH - 3

Description:



Triad high current rod core inductors provide cost effective energy storage. By conditioning the output signal, the inductor smoothes out the current waveform to provide a more stable current. These low cost inductors are designed to be compatible with automated P.C.B. installation.

Outline Dimensions:

A. Dimensions: As figure show Unit: In inch
B. PIN DIM. : As figure show
C. WT Lbs. : 0.03 Lbs.

Type No.	+/- 15% Inductance uH	DC Rated Current	Max. DC Resistance (mOhms)	Lead Diameter
FIRCH-3	3.60	8.10A	9.95	0.040"

Inductance at 20KHz to 200KHz
Rated current 40C temperature rise.

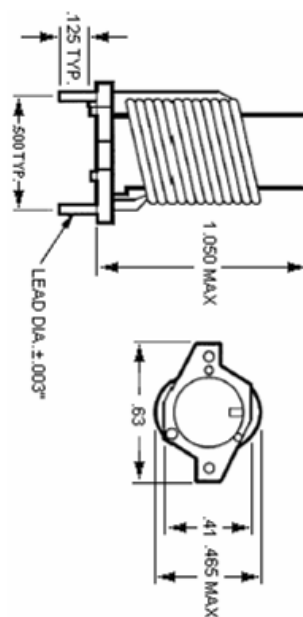

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative..

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetix website for the most current version. For soldering and washing information please see <http://www.triadmagnetix.com/faq.html>

web: www.TriadMagnetix.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: June 7, 2016

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Triad Magnetics:](#)

[FIRCH-3](#)