

Power Splitter/Combiner

ZN4PD1-63-S+

4 Way-0° 50Ω 2000 to 6000 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	1W max.
DC Current	1.0 A (250mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	3
PORT 1	1
PORT 2	2
PORT 3	4
PORT 4	5

Outline Drawing

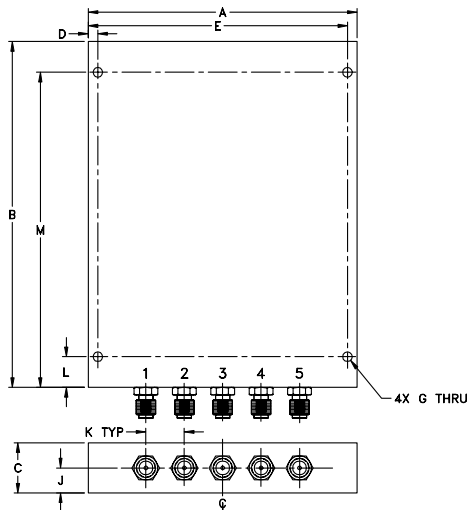

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
3.50	4.50	.65	.125	3.375	--	.125
88.90	114.30	16.51	3.18	85.73	--	3.18
H	J	K	L	M	wt	
--	.33	.50	.400	4.100	grams	
--	8.38	12.70	10.16	104.14	288	

Features

- wide frequency band, 2000 to 6000 MHz
- low insertion loss, 0.7 dB typ.
- low amplitude unbalance 0.1 dB typ.
- low phase unbalance 1.0 deg. typ.

Applications

- high band PCS
- UNII
- ISM 802.11A



Generic photo used for illustration purposes only

CASE STYLE: UU846

Connectors	Model
SMA	ZN4PD1-63-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
f_L - f_U	Typ.	Min.	Typ.	Max.	Max.	Max.	S Typ.	OUT Typ.
2000-6000	26	17	0.7	1.3	5	0.4	1.20	1.15


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
2000.00	6.48	6.48	6.49	6.45	0.03	23.63	37.44	23.98	0.64	1.29	1.25	1.25	1.24	1.25
2200.00	6.43	6.43	6.44	6.39	0.05	23.43	35.91	23.81	0.59	1.05	1.17	1.18	1.17	1.16
2400.00	6.46	6.46	6.47	6.42	0.05	21.86	32.38	22.07	0.66	1.11	1.12	1.14	1.13	1.12
2700.00	6.54	6.53	6.54	6.48	0.06	21.17	29.48	21.21	0.71	1.14	1.20	1.21	1.19	1.18
2900.00	6.71	6.70	6.71	6.65	0.06	22.08	28.54	22.04	0.70	1.15	1.24	1.24	1.23	1.21
3300.00	6.75	6.75	6.77	6.68	0.08	28.77	30.43	28.16	1.10	1.23	1.25	1.23	1.23	1.20
3700.00	6.58	6.62	6.62	6.52	0.10	36.35	35.69	36.41	1.66	1.07	1.10	1.10	1.09	1.09
4100.00	6.57	6.62	6.64	6.52	0.12	38.92	40.56	35.34	1.54	1.04	1.02	1.01	1.03	1.04
4500.00	6.74	6.72	6.73	6.67	0.07	28.57	36.06	27.06	1.34	1.19	1.06	1.06	1.05	1.09
4900.00	6.86	6.80	6.80	6.78	0.09	26.41	33.47	26.23	1.71	1.18	1.11	1.13	1.12	1.12
5300.00	7.07	7.04	7.05	6.96	0.11	24.11	29.43	23.55	1.54	1.21	1.11	1.11	1.11	1.08
5500.00	7.00	7.05	7.05	6.88	0.17	21.50	27.37	20.85	1.58	1.28	1.12	1.12	1.14	1.09
5700.00	6.90	6.98	6.98	6.76	0.21	20.24	25.26	19.67	1.68	1.30	1.16	1.16	1.19	1.13
5900.00	6.85	6.91	6.91	6.72	0.19	19.87	23.47	19.64	1.36	1.25	1.19	1.17	1.21	1.18
6000.00	6.89	6.92	6.90	6.74	0.18	19.46	22.75	19.42	1.20	1.20	1.20	1.17	1.21	1.20

1. Total Loss = Insertion Loss + 6dB splitter loss.

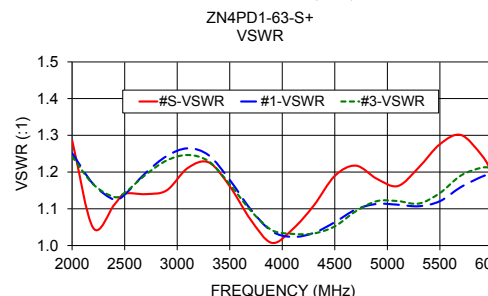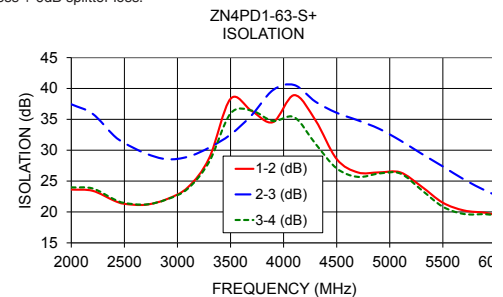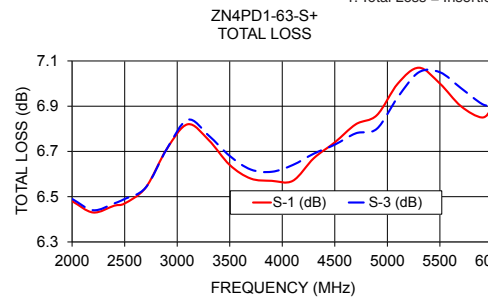

Electrical Schematic

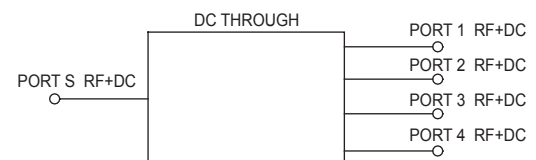

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZN4PD1-63-S+](#)