

Applications

- 3G / 4G Wireless Infrastructure
- Repeaters
- Small cells

Product Features


- 3.3 – 3.8 GHz Frequency Range
- 40 dB Gain (min attenuation state) at 3.5 GHz
- 31.5 dB Gain Range in 0.5 dB Steps
- +44.5 dBm Output IP3
- +27.8 dBm Output P1dB
- Fully Internally Matched Module
- Integrated Blocking Capacitors, Bias Inductors
- 3-wire SPI™ Control Programming

General Description

The TQC9312 is a digital variable gain amplifier (DVGA) featuring high linearity over the entire gain control range. This amplifier module integrates two gain blocks, a digital-step attenuator (DSA), and a high linearity ½ W amplifier. The module has the added feature of integrating all matching components, bias chokes and blocking capacitors. The internal 6-bit DSA provides a 31.5 dB gain control range in 0.5 dB steps, and is controlled with a serial periphery interface (SPI™).


The TQC9312 features variable gain from 9 dB to 40dB at 3.5 GHz, +44.5 dBm output IP3, and +27.8 dBm P1dB. The module operates from a single +5V supply and is available in a compact 28-pin 6x6 mm leadless SMT package.

The TQC9312 is pin compatible with the TQM879008 (1.5-2.7GHz, 0.5W P1dB) and TQM879006A (1.4-2.7GHz, 0.25W P1dB). This allows one to size the right type of device for specific system level requirements as well as making the DVGA family ideal for applications where a common PCB layout is used for different frequency bands.



28-pin 6x6 mm leadless SMT package

Functional Block Diagram

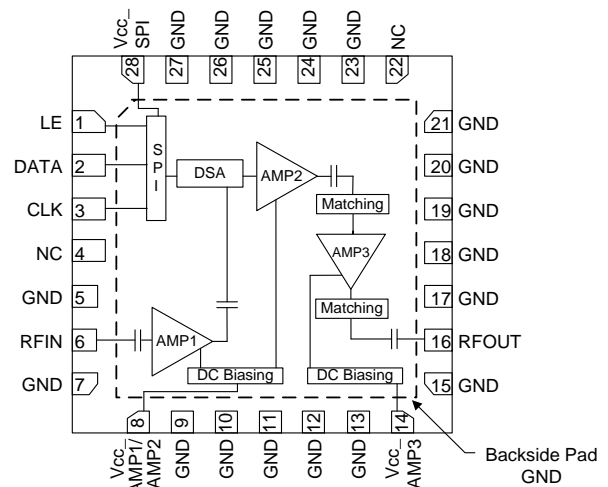

Pin Configuration

| Pin No. | Label |
|------------------------------|-----------------|
| 1 | LE |
| 2 | DATA |
| 3 | CLK |
| 4, 22 | NC |
| 6 | RFIN |
| 8 | VCC_AMP1 / AMP2 |
| 14 | VCC_AMP3 |
| 16 | RFOUT |
| 28 | VCC_SPI |
| 5, 7, 9-13, 15, 17-21, 23-27 | GND |
| Backside Pad | GND |

Ordering Information

| Part No. | Description |
|-------------|--|
| TQC9312 | 3.3-3.8 GHz DVGA |
| TQC9312-PCB | Fully Assembled Evaluation Board Includes USB control board |

Standard T/R size = 2500 pieces on a 13" reel.

Absolute Maximum Ratings

| Parameter | Rating |
|--|-----------------------|
| Storage Temperature | -55 to +150°C |
| RF Input Power, 50Ω, T = 25°C | +23 dBm |
| V _{DD} , Power Supply Voltage | +5.5 V |
| Digital Input Voltage | V _{CC} +0.5V |

Operation of this device outside the parameter ranges given above may cause permanent damage.

Recommended Operating Conditions

| Parameter | Min | Typ | Max | Units |
|--|-------|------|-------|-------|
| V _{CC} (pins 8, 14, 28) | +4.75 | +5.0 | +5.25 | V |
| Case Temperature | -40 | | +85 | °C |
| T _j (for >10 ⁶ hours MTTF) | | | 170 | °C |



Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Test conditions: V_{CC}=+5 V, V_{CC-SPI} = +5V, Temp= +25°C, 50Ω system, Maximum Gain State

| Parameter | Conditions | Min | Typ | Max | Units |
|-------------------------------------|---|------------------------------------|-------|------|-------|
| Operational Frequency Range | | 3300 | | 3800 | MHz |
| Test Frequency | | | 3500 | | MHz |
| Gain | | 37 | 40 | 43 | dB |
| Gain Control Range | 0.5 dB Step Size | | 31.5 | | dB |
| Attenuation Accuracy | 3 wire SPI, major states | ± (0.5 + 8% of Atten. Setting) Max | | | dB |
| Control Interface | 3-wire SPI | | 6 | | Bits |
| Input Return Loss | | | 15 | | dB |
| Output Return Loss | | | 17.4 | | dB |
| Output P1dB | | | +27.8 | | dBm |
| Output IP3 | P _{out} =+11 dBm/tone, Δf=1MHz | +39 | +44.5 | | dBm |
| Noise Figure | | | 4 | | dB |
| I/O Impedance | | | 50 | | Ω |
| Supply Voltage | AMP1, AMP2, AMP3 | | +5 | | V |
| Supply Current | | 220 | 285 | 320 | mA |
| Thermal Resistance, θ _{jc} | Module (junction to case) | | | 20.5 | °C/W |

TQC9312-PCB Evaluation Board

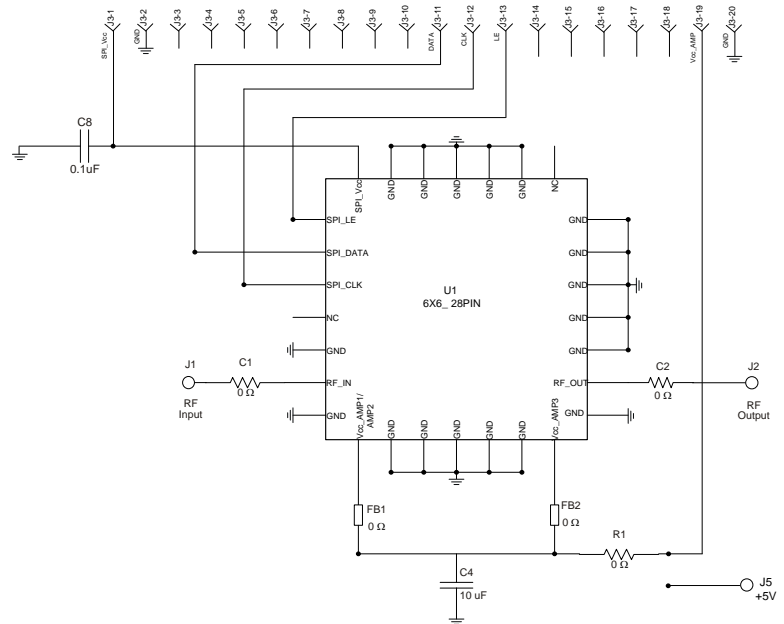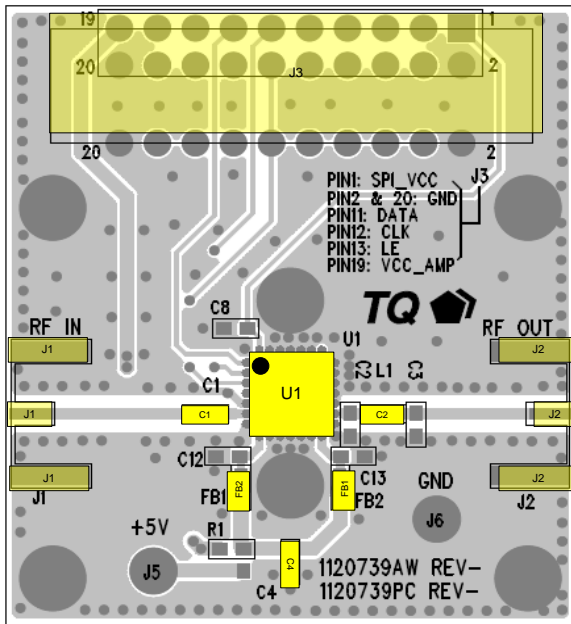

Notes:

1. See Evaluation Board PCB Information section for material and stack-up.
2. All Components are of 0603 size unless stated otherwise.
3. See Serial Control Interface section for SPI Timing Diagram.
4. 0 Ω jumpers may be replaced with copper traces in the target application layout.
5. Different ground pins are used for SPI (digital) and analog supply voltages.
6. The primary RF microstrip characteristic line impedance is 50 Ω.
7. The single power supply is used to provide supply voltage to AMP1, AMP2 and AMP3.

Bill of Material –TQC9312-PCB

| Reference Des. | Value | Description | Manufacturer | Part Number |
|------------------|--------|---------------------------------|--------------|-------------|
| U1 | | 3.5 GHz 1/2 W DVGA | TriQuint | TQC9312 |
| C8 | 0.1 uF | Cap, Chip, 0603, 16V, X7R, 10% | various | |
| C4 | 10 uF | Cap, Chip, 0603, 6.3V, X5R, 20% | various | |
| C1, C2, FB1, FB2 | 0 Ω | Res, Chip, 0603, 1/16W, 5% | various | |













Typical Performance – TQC9312-PCB

Test conditions unless otherwise noted: V_{CC}=+5 V, I_{CC} = 285mA, Temp=25°C, 50 Ω system, Maximum Gain State

| Parameter | Typical Value | | | | | | | Units |
|---|---------------|-------|-------|-------|-------|-------|-----|-------|
| | 3300 | 3400 | 3500 | 3600 | 3700 | 3800 | | |
| Frequency | 3300 | 3400 | 3500 | 3600 | 3700 | 3800 | GHz | |
| Gain | 40.1 | 40 | 39.8 | 40.3 | 40.7 | 41.3 | dB | |
| Input Return Loss | 17 | 17.8 | 15 | 12.6 | 12.6 | 14 | dB | |
| Output Return Loss | 17 | 17.5 | 17.4 | 17.4 | 15.6 | 14.8 | dB | |
| Output P1dB | +28.3 | +28.2 | +27.8 | +27.5 | +27.1 | +26.7 | dBm | |
| Output IP3 (Pout=+11 dBm/tone, Δf =1 MHz) | +43.4 | +43.4 | +44.5 | +44 | +46 | +44 | dBm | |

Typical Performance Plots – TQC9312-PCB

Test conditions unless otherwise specified: $V_{CC}=+5\text{ V}$, $I_{CC} = 285\text{mA}$, $\text{Temp} = +25^\circ\text{C}$, 50Ω system

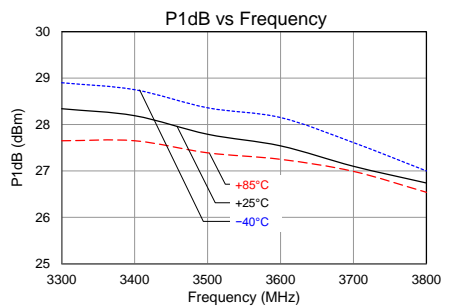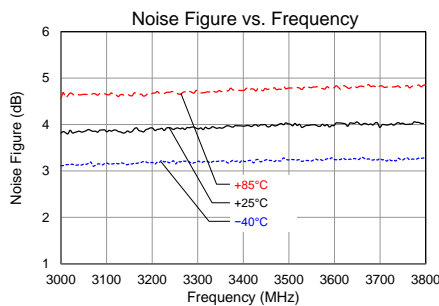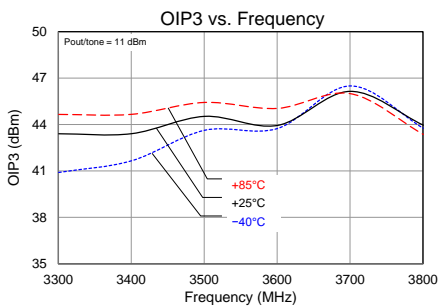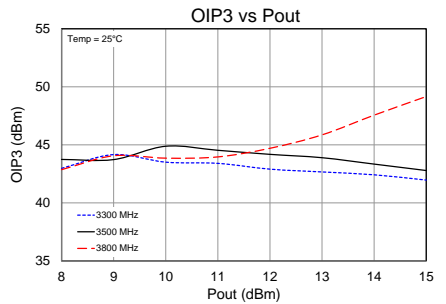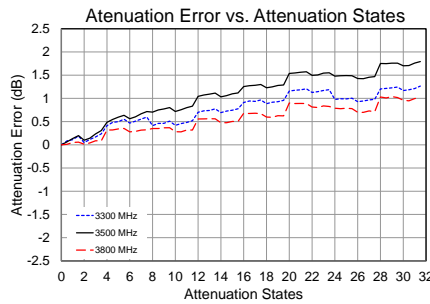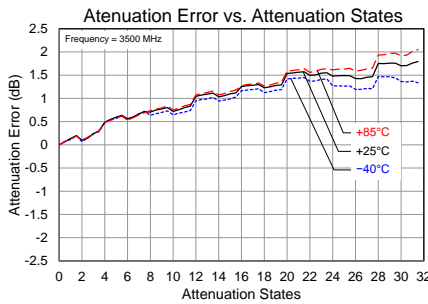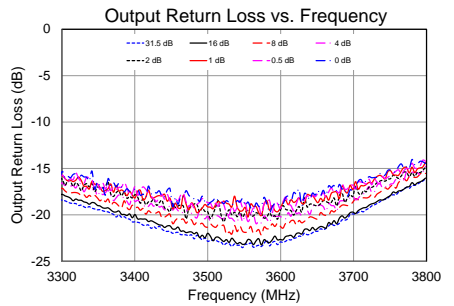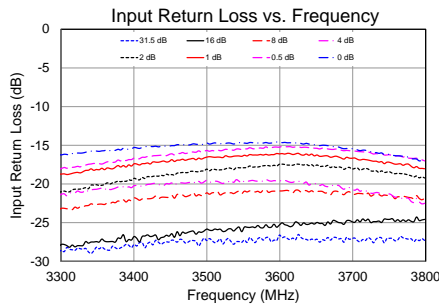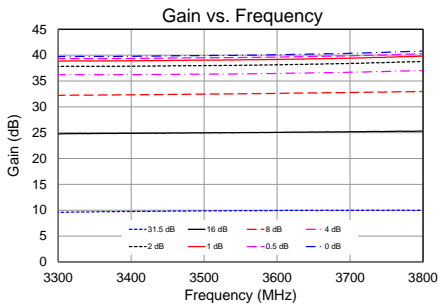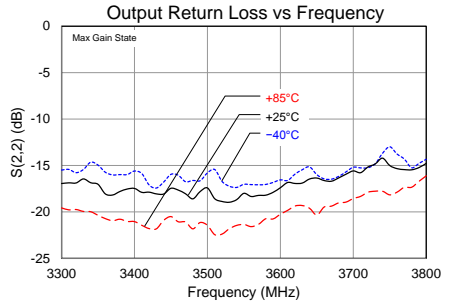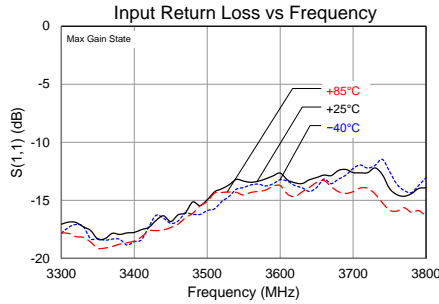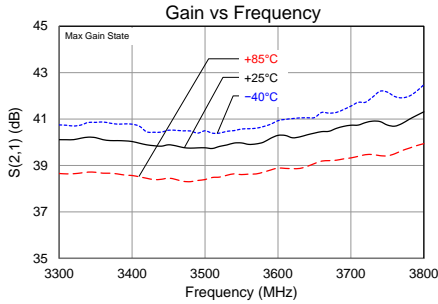

Serial Control Interface

The TQC9312 has a CMOS SPI™ input compatible serial interface. This serial control interface converts the serial data input stream to parallel output word. The input is 3-wire (CLK, LE and SID) SPI™ input compatible. At power up, the serial control interface resets the DSA to the minimum gain state. The 6-bit SID (Serial Input Data) word is loaded into the register on rising edge of the CLK, MSB first. When LE is high, CLK is internally disabled.

Serial Control Timing Characteristics (Test conditions: $V_{CC} = +5\text{ V}$, $Temp.=25^{\circ}\text{C}$)

| Parameter | Condition | Min | Max | Units |
|--------------------------------|-----------------------------|-----|-----|-------|
| Clock Frequency | 50% Duty Cycle | | 20 | MHz |
| LE Setup Time, t_{LESUP} | after last CLK rising edge | 10 | | ns |
| LE Pulse Width, t_{LEPW} | | 16 | | ns |
| SERIN set-up time, t_{SDSUP} | before CLK rising edge | 8 | | ns |
| SERIN hold-time, t_{SDHLD} | after CLK rising edge | 8 | | ns |
| LE Pulse Spacing t_{LE} | LE to LE pulse spacing | 630 | | ns |
| Propagation Delay t_{PLO} | LE to Parallel output valid | 10 | | ns |

Serial Control DC Logic Characteristics (Test conditions: $V_{CC} = +5\text{ V}$, $Temp.=25^{\circ}\text{C}$)

| Parameter | Condition | Min | Max | Units |
|------------------------------------|-------------------------|-----|----------|---------------|
| Input Low State Voltage, V_{IL} | | 0 | 0.8 | V |
| Input High State Voltage, V_{IH} | | 1.8 | V_{CC} | V |
| Input Current, I_{IH}/I_{IL} | On SID, LE and CLK pins | -10 | +10 | μA |


SERIN Control Logic Truth Table

| 6-Bit Control Word | | | | | | Attenuation State |
|--------------------|----|----|-----|----|----|-------------------|
| MSB | | | LSB | | | |
| D5 | D4 | D3 | D2 | D1 | D0 | |
| 1 | 1 | 1 | 1 | 1 | 1 | Reference : IL |
| 1 | 1 | 1 | 1 | 1 | 0 | 0.5 dB |
| 1 | 1 | 1 | 1 | 0 | 1 | 1 dB |
| 1 | 1 | 1 | 0 | 1 | 1 | 2 dB |
| 1 | 1 | 0 | 1 | 1 | 1 | 4 dB |
| 1 | 0 | 1 | 1 | 1 | 1 | 8 dB |
| 0 | 1 | 1 | 1 | 1 | 1 | 16 dB |
| 0 | 0 | 0 | 0 | 0 | 0 | 31.5 dB |

Any combination of the possible 64 states will provide an attenuation of the sum of bits selected.

Timing Diagram


CLK is internally disabled when LE is high

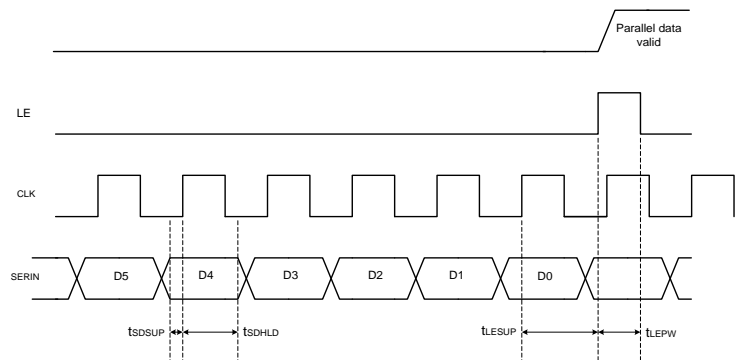


Detailed Device Description

The TQC9312 is a 50 Ω internally matched digital variable gain amplifier (DVGA) featuring high linearity over the entire gain control range. The amplifier module features the integration of two gain block, a digital-step attenuator (DSA), along with a high linearity 1/2 W amplifier. The module is unconditionally stable. Internal blocking capacitors and bias structures keep external parts count to a minimum. The DVGA is optimized for Band 41.

Functional Block Diagram

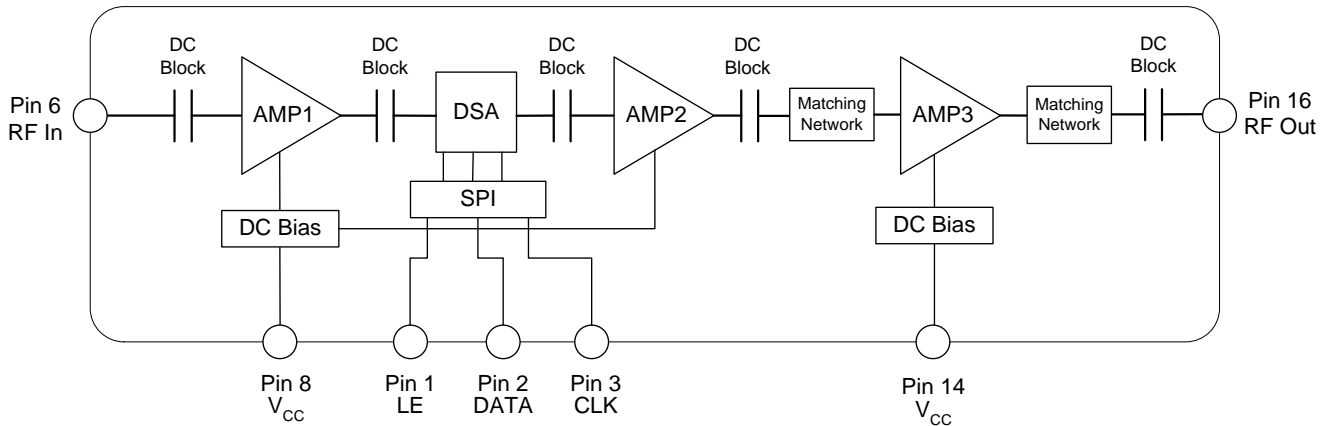


Pin Configuration and Description

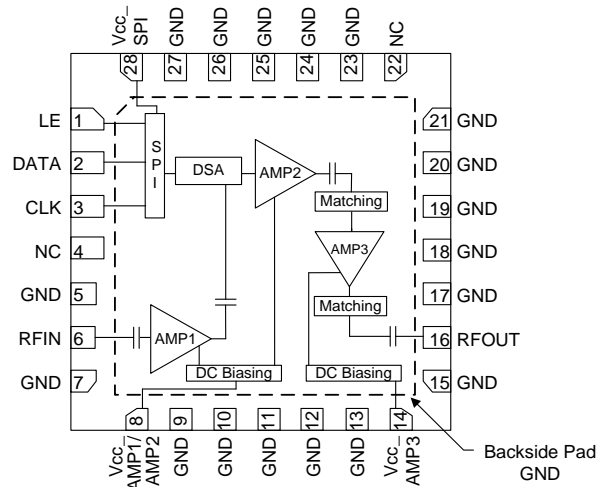


| Pin No. | Label | Description |
|------------------------------|---------------|---|
| 1 | LE | Serial Latch Enable Input. When LE is high, latch is clear and content of SPI control the attenuator. When LE is low, data in SPI is latched. |
| 2 | DATA | Serial data input. The data and clock pins allow the data to be entered serially into SPI and is independent of Latch state. |
| 3 | CLK | Serial clock input. |
| 4, 22 | N/C | No connect or open. This pin is not connected in this module |
| 6 | RFIN | Input, matched to 50 ohms. Internally DC blocked. |
| 8 | VCC_AMP1/AMP2 | Supply Voltage to AMP1 and AMP2. This pin is connected internally to bypass capacitors followed by inductor inside the module. |
| 14 | VCC_AMP3 | Supply Voltage to AMP3. This pin is connected internally to bypass capacitors followed by inductor inside the module. |
| 16 | RFOUT | Output matched to 50 ohms. Internally DC blocked. |
| 28 | VCC_SPI | SPI and DSA DC supply. This pin is connected to bypass capacitor internally. |
| 5, 7, 9-13, 15, 17-21, 23-27 | GND | RF/DC Ground Connection |
| Backside Pad | GND | RF/DC Ground Connection |

Evaluation Board PCB Information

TriQuint PCB 1120739 Material and Stack-up

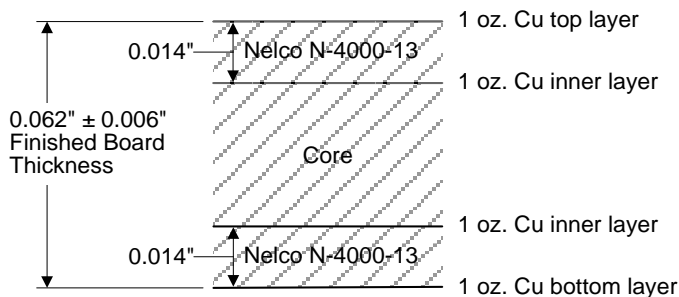


Microstrip line details: width = .030", spacing = .036".

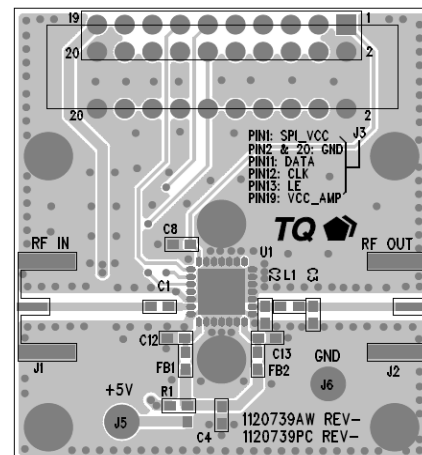

Package Marking and Dimensions


Marking: Part number – TQC9312
 Year/week code – YYWW CCCC
 Assembly code – AaXXXX

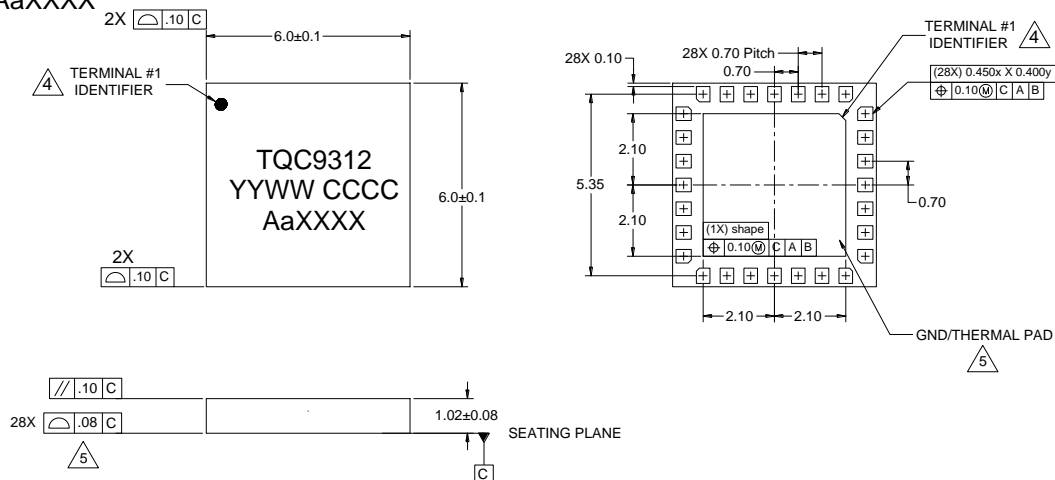

Notes:

1. All dimensions are in millimeters. Angles are in degrees.
2. Dimension and tolerance formats conform to ASME Y14.4M-1994.
3. The terminal #1 identifier and terminal numbering conform to JESD 95-1 SPP-012.
4. Co-planarity applies to the exposed ground/thermal pad as well as the contact pins.
5. Package body length/width does not include plastic flash protrusion across mold parting line.

PCB Mounting Pattern

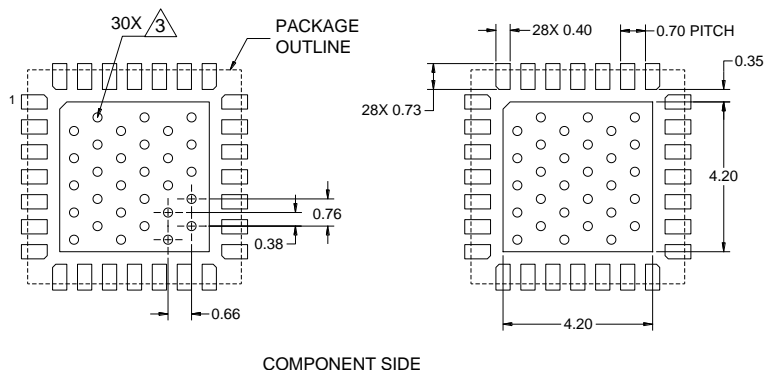

Notes:

1. All dimensions are in millimeters. Angles are in degrees.
2. Use 1 oz. copper minimum for top and bottom layer metal.
3. Vias are required under the backside paddle of this device for proper RF/DC grounding and thermal dissipation. We recommend a 0.35mm (#80/.0135") diameter bit for drilling via holes and a final plated thru diameter of 0.25 mm (0.10").
4. Ensure good package backside paddle solder attach for reliable operation and best electrical performance.

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: 1C
Value: Passes $\geq 1000V$ to $< 2000V$
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

ESD Rating: C3
Value: Passes $\geq 1000V$
Test: Charged Device Model (CDM)
Standard: JEDEC Standard JESD22-C101

MSL Rating

MSL Rating: Level 3
Test: $+260\text{ }^{\circ}\text{C}$ convection reflow
Standard: JEDEC standard IPC/JEDEC J-STD-020

Solderability

Compatible with both lead-free ($260\text{ }^{\circ}\text{C}$ max. reflow temp.) and tin/lead ($245\text{ }^{\circ}\text{C}$ max. reflow temp.) soldering processes.

Package lead plating: electrolytic plated Au over Ni

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($\text{C}_{15}\text{H}_{12}\text{Br}_4\text{O}_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.triquint.com

Tel: 877-800-8584

Email: customer.support@qorvo.com

For information about the merger of RFMD and TriQuint as Qorvo:

Web: www.qorvo.com

For technical questions and application information:

Email: sjcapplications.engineering@qorvo.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qorvo:

[TQC9312](#) [TQC9312-PCB](#)