



QPC2040

X-Band 10 W GaN SPDT Switch

Product Overview



Qorvo's QPC2040 is a Single-Pole, Double-Throw (SPDT) switch fabricated on Qorvo's QGaN15 0.15um GaN on SiC production process.

Operating from 8 to 12 GHz, the QPC2040 typically supports 10 W input power handling at control voltages of 0/-28 V for pulsed RF operations. This switch maintains low insertion loss less than 1.2 dB and greater than 30 dB isolation, making it ideal for high power switching applications across both defense and commercial platforms.

QPC2040 is offered in a 3 x 4.5 mm plastic over-molded QFN package.

Lead-free and RoHS compliant

Functional Block Diagram

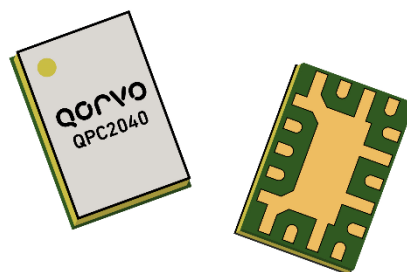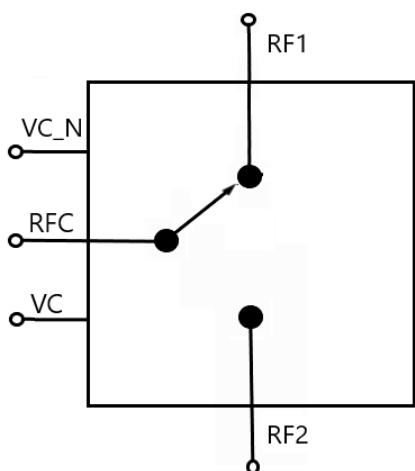

3 x 4.5 mm 18 Lead OVM QFN

Key Features

- SPDT
- Frequency Range: 8 to 12 GHz
- Input Power: 10 W
- Insertion Loss: < 1.2 dB
- Isolation: >30 dB Typical
- Switching Speed: 35 ns
- Control Voltages: 0 V/-28 V
- Redundant Control Lines
- Package Dimensions: 3 x 4.5 x 1.05 mm

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Applications

- Radar
- Communications
- Electronic Warfare

Ordering Information

Part No.	Description
QPC2040SR	X-Band GHz 10W SPDT Switch 100 Piece 7" Reel
QPC2040EVB01	QPC2040 Evaluation Board

Absolute Maximum Ratings


Parameter	Rating
Control Voltage (V_C , V_{C_N})	-30 V to 0V
Control Current (I_C , I_{C_N})	See Plot
Power Dissipation, 85 °C	7.5 W
RF Input Power, $P_W = 100\mu$, DC = 25%, 50 Ω , $T_{BASE} = 85$ °C	44.5 dBm
RF Input Power, $P_W = 100\mu$, DC = 25%, 3:1 VSWR, $T_{BASE} = 85$ °C	43 dBm
Mounting Temperature (30 sec)	260 °C
Storage Temperature	-55 to 150 °C

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Recommended Operating Conditions

Parameter	Min	Typ.	Max	Units
V_C		0/-28		V
V_{C_N}		-28/0		V
Temperature Range	-40	+25	+85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

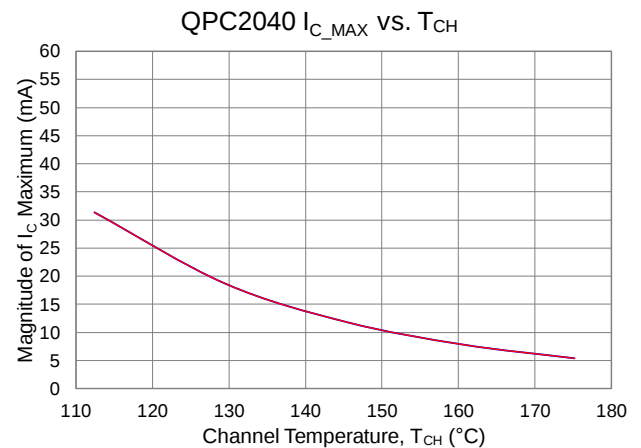

Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ^(1,2)	$T_{BASE} = 85$ °C, $V_C = 0$ V, $V_{C_N} = -28$ V, Pulsed RF: $P_W = 100\mu$, DC = 25%	14.75	°C/W
Channel Temperature (T_{CH}) ^(1,2)	Freq. = 10.0 GHz, $P_{IN} = 44$ dBm, $P_{OUT} = 42.5$ dBm, $P_{DISS} = 1.83$ W	112	°C

Notes:

1. Measured to the back of the package.
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)
3. This is a total P_{DISS} in the FETs.







Electrical Specifications

Test conditions unless otherwise noted: 25 °C, $V_C = 0\text{ V}/-28\text{ V}$, $V_{C_N} = -28\text{ V}/0\text{ V}$, see function table on page 15.

Parameter		Min	Typ.	Max	Units
Operational Frequency Range		8	–	12	GHz
Insertion Loss (On-State)	Frequency = 8 GHz	–	1.0	–	dB
	Frequency = 10 GHz	–	1.05	–	
	Frequency = 12 GHz	–	1.18	–	
Input Return Loss (On-State) Common Port RL	Frequency = 8 GHz	–	14	–	dB
	Frequency = 10 GHz	–	22	–	
	Frequency = 12 GHz	–	19	–	
Output Return Loss (On-State) Switched Port RL	Frequency = 8 GHz	–	14	–	dB
	Frequency = 10 GHz	–	17	–	
	Frequency = 12 GHz	–	25	–	
Isolation (Off-State)	Frequency = 8 GHz	–	35	–	dB
	Frequency = 10 GHz	–	36	–	
	Frequency = 12 GHz	–	34	–	
Output Return Loss Isolated Port	Frequency = 8 GHz	–	4.0	–	dB
	Frequency = 10 GHz	–	4.5	–	
	Frequency = 12 GHz	–	4.5	–	
Input Power ($P_{0.1\text{dB}}$)		–	41.7	–	dBm
Control Voltage		-30	-28	–	V
Total Supply Current		–	<3	–	mA
Switching Speed		–	35	–	ns
Insertion Loss Temperature Coefficient		–	-0.004	–	dB/°C







Performance Plots – Small Signal (RF1 Port)

Notes: RFC = Port 3; RF1 = Port 1; RF2 = Port 2

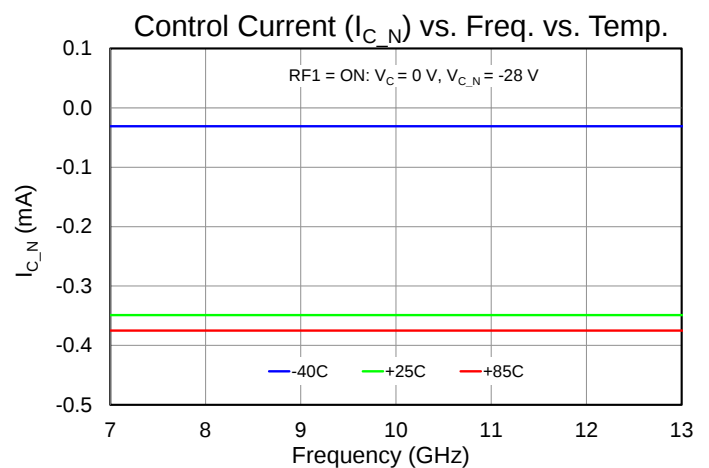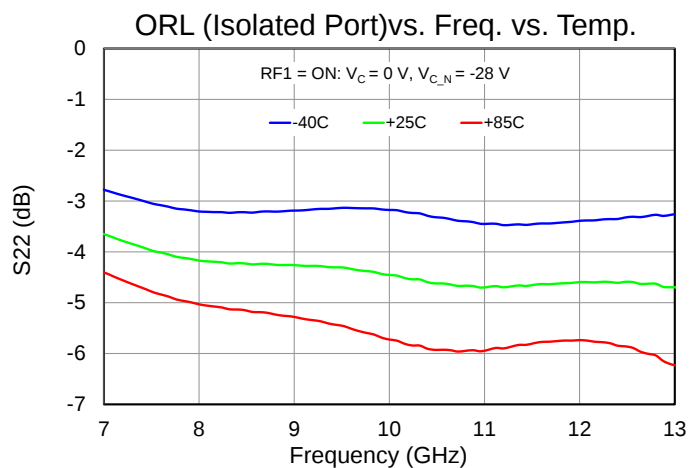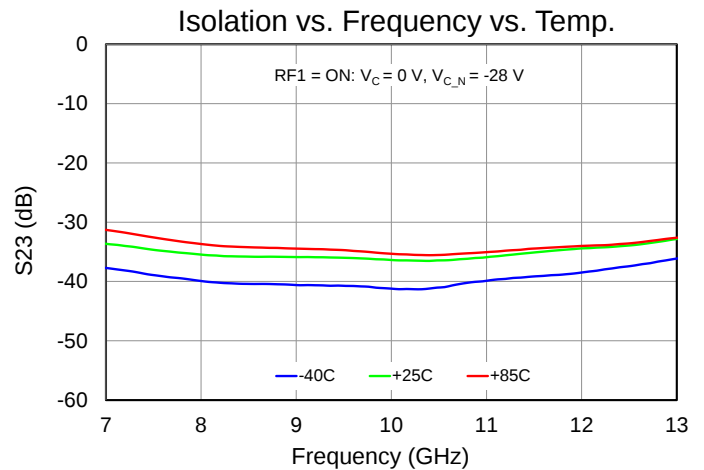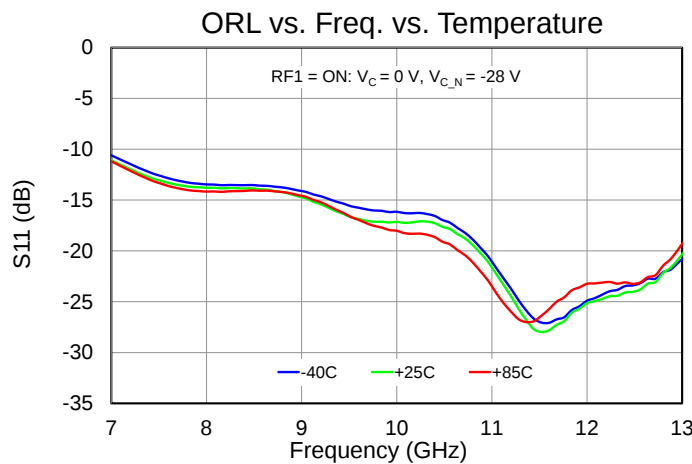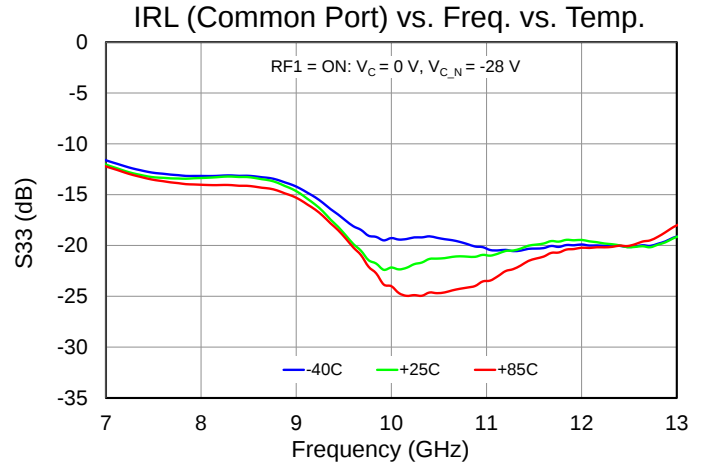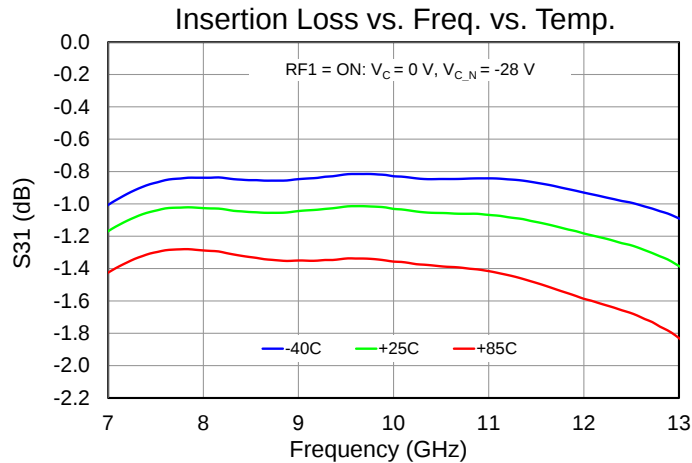







Performance Plots – Small Signal (RF1 Port)

Notes: RFC = Port 3; RF1 = Port 1; RF2 = Port 2

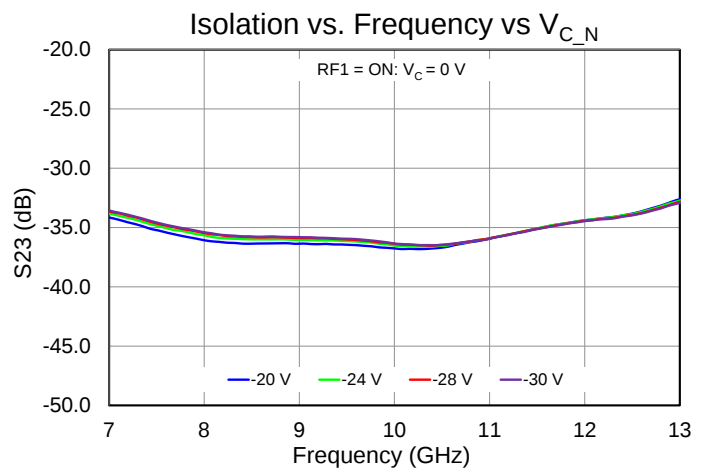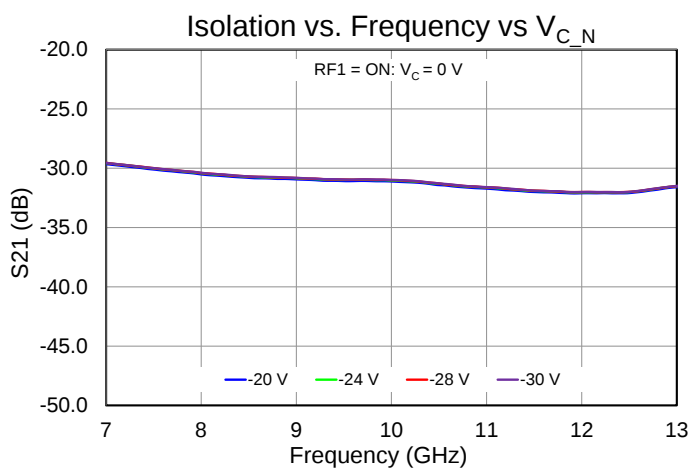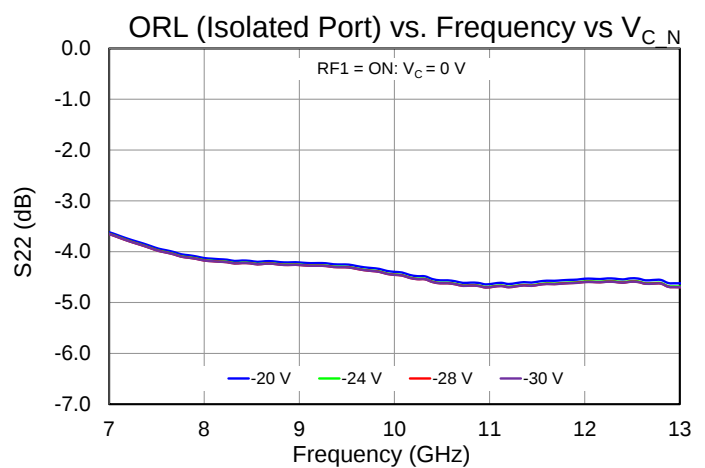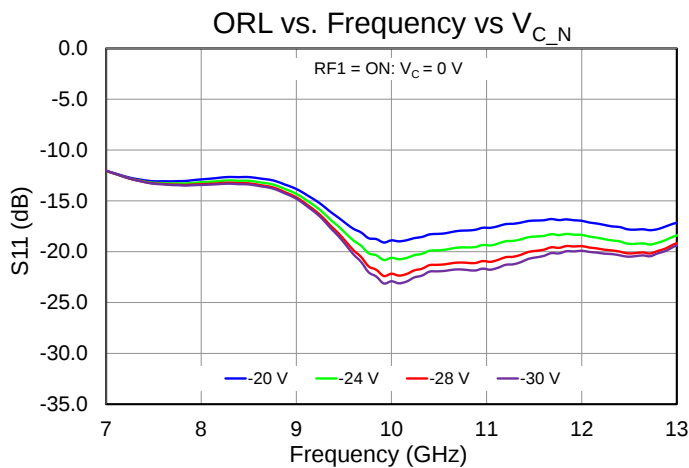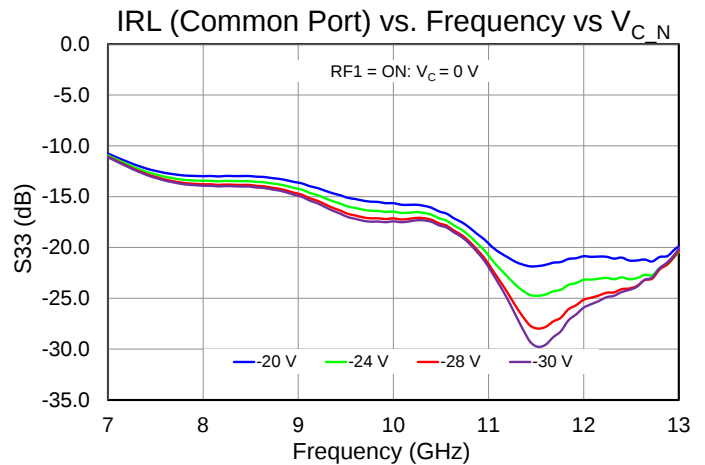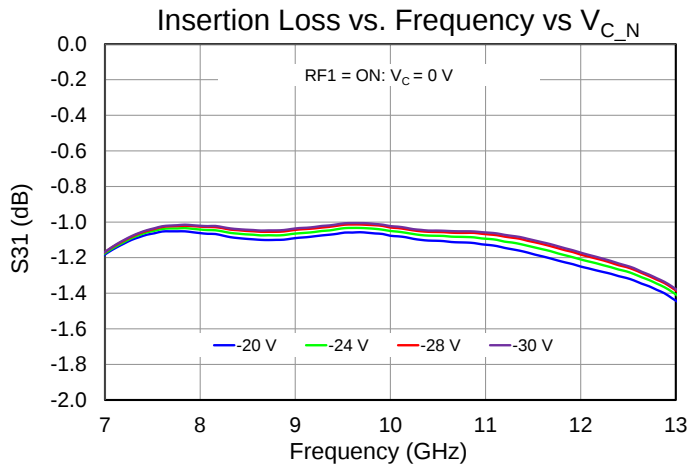







Performance Plots – Small Signal (RF2 Port)

Notes: RFC = Port 3; RF1 = Port 1; RF2 = Port 2

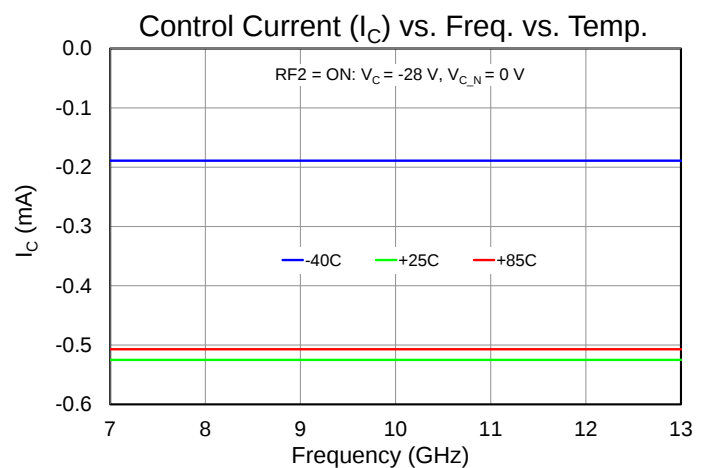
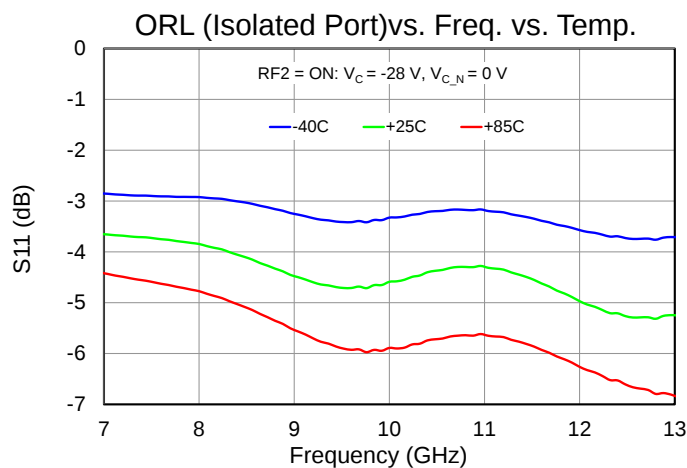
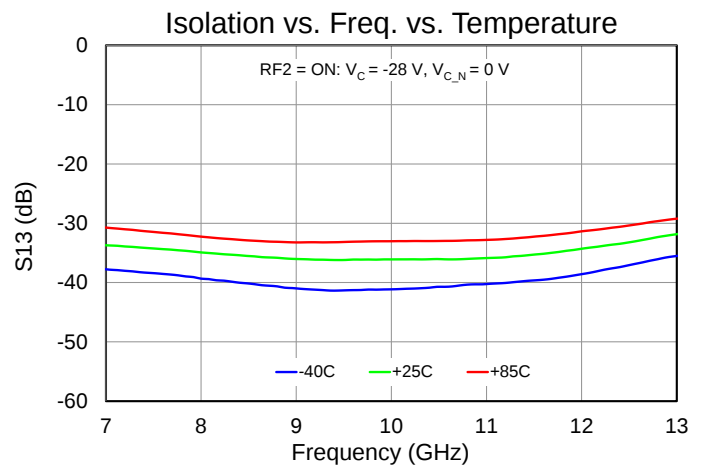
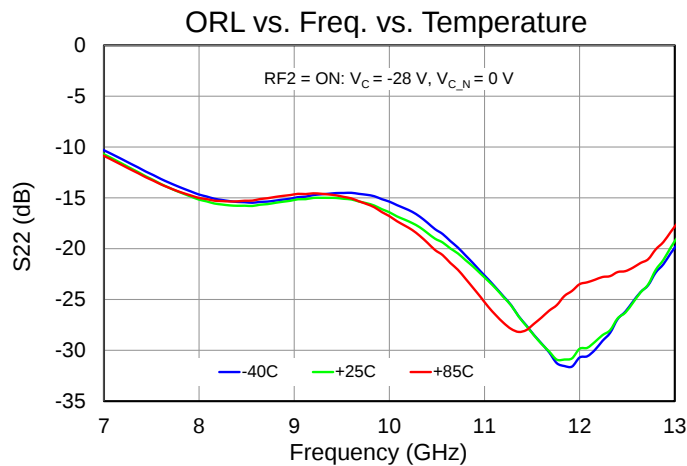
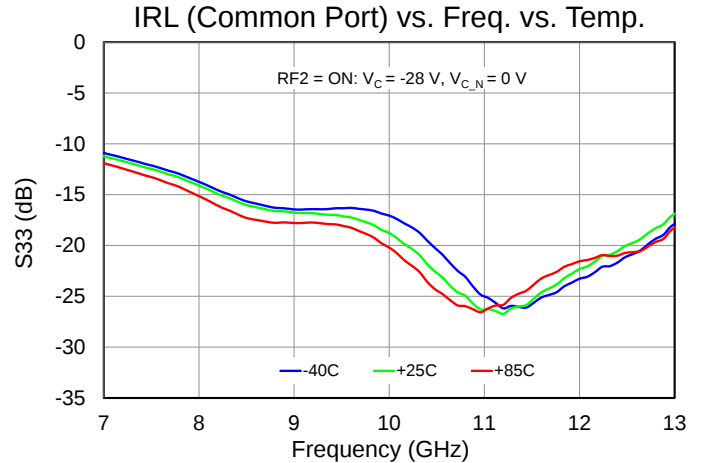
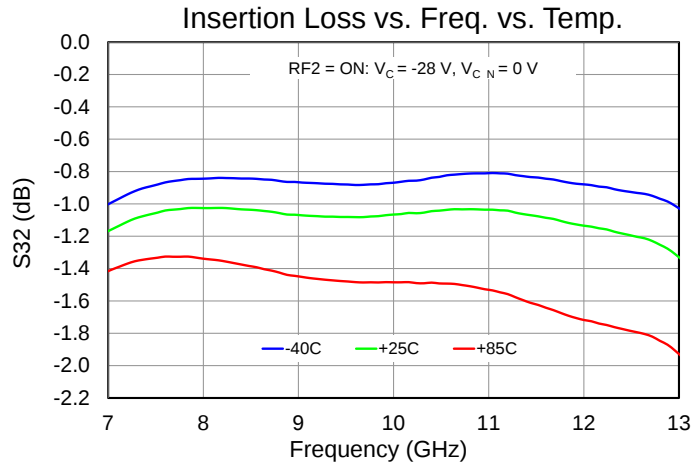


Performance Plots – Small Signal (RF2 Port)





Notes: RFC = Port 3; RF1 = Port 1; RF2 = Port 2

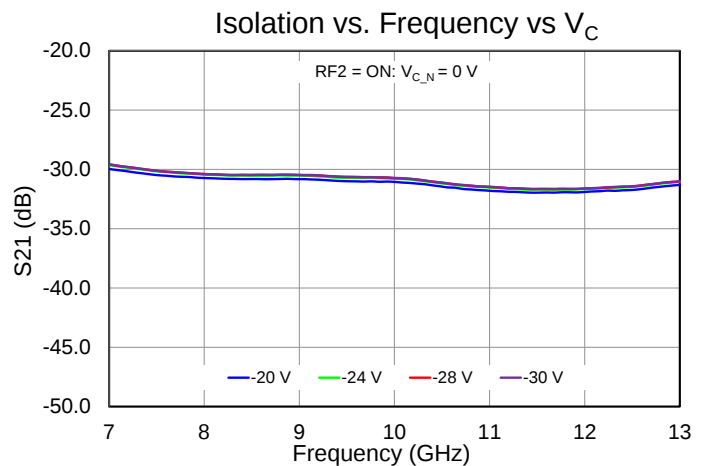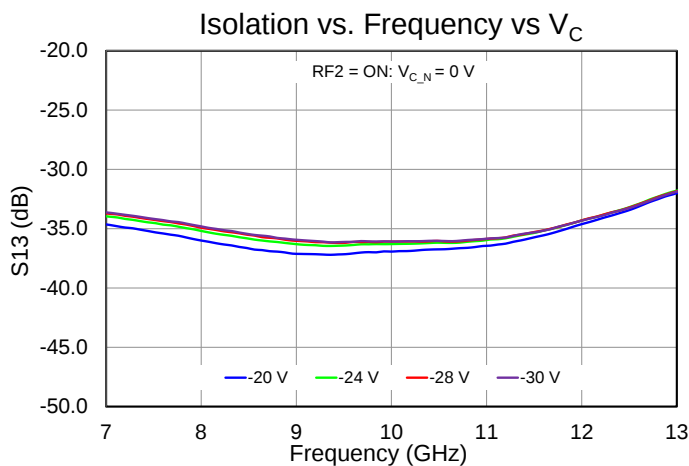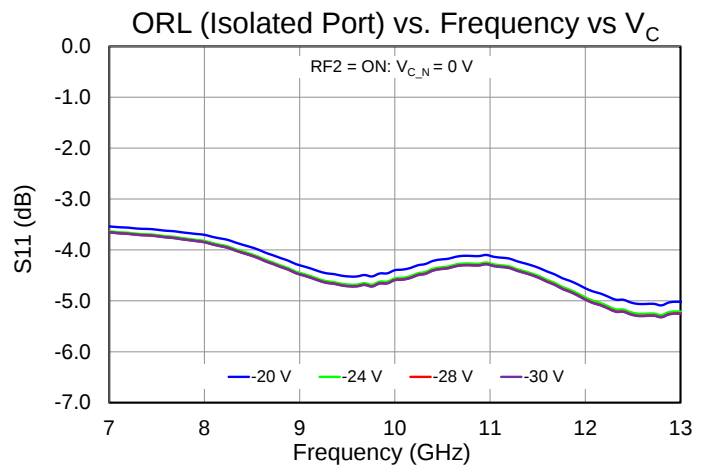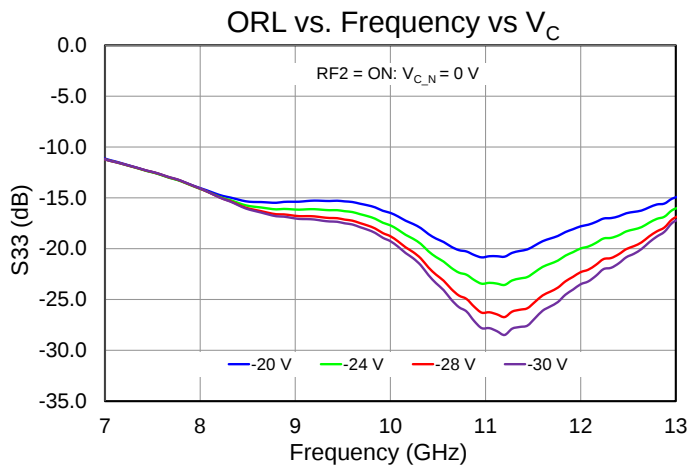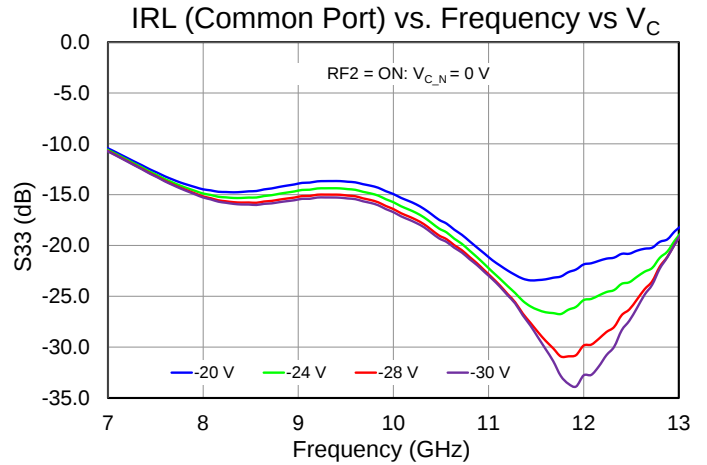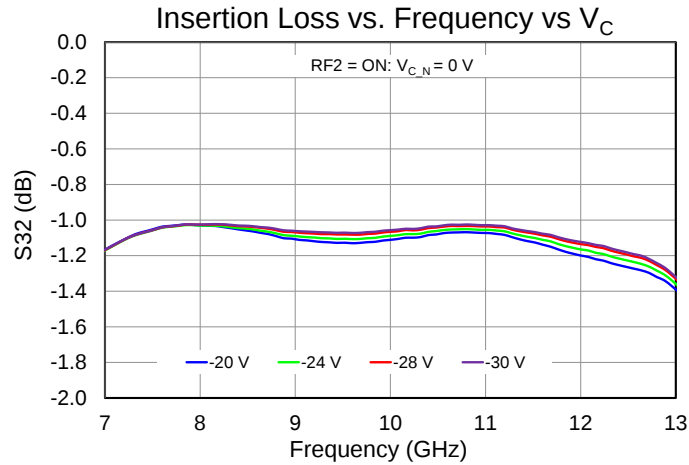







Performance Plots – Compression (Pulsed) RF1 Port

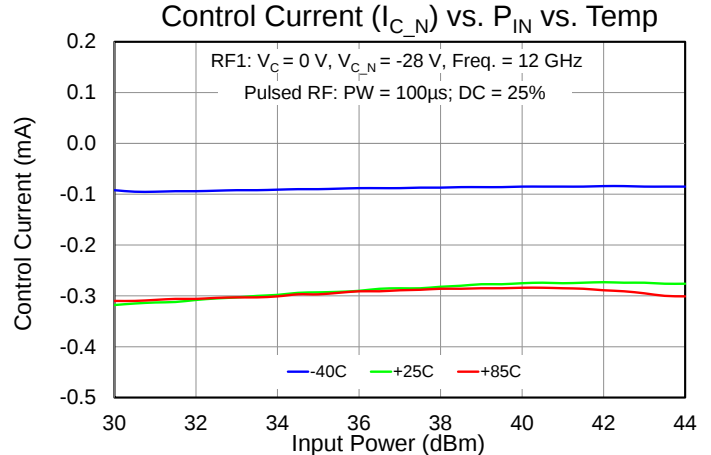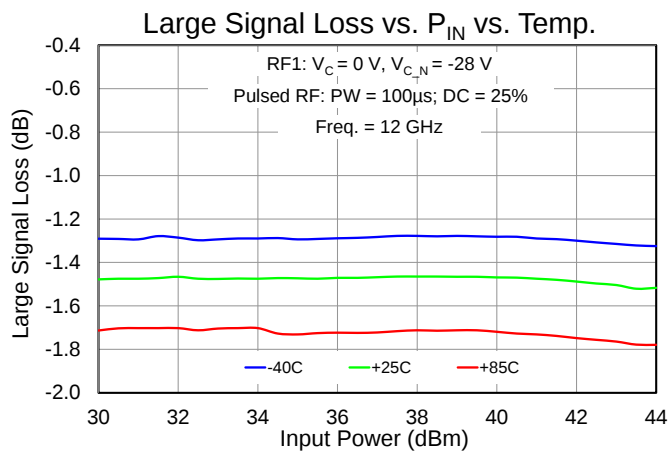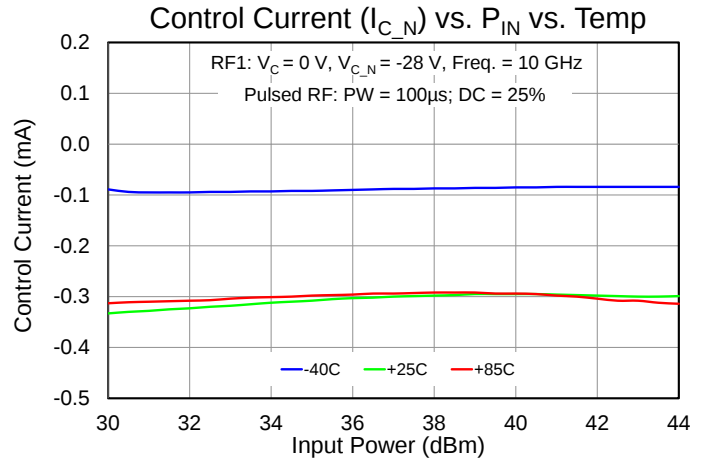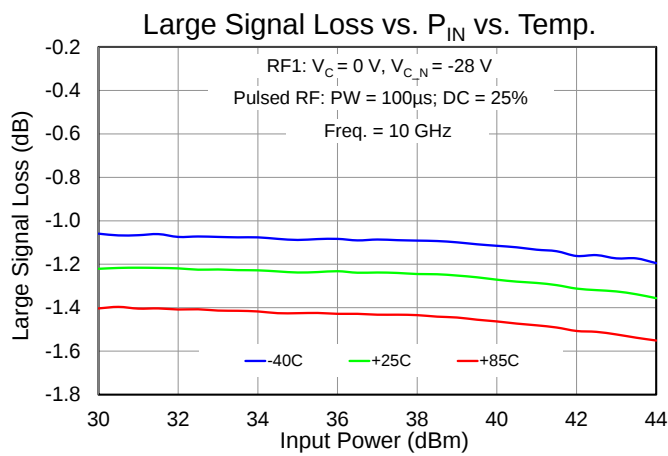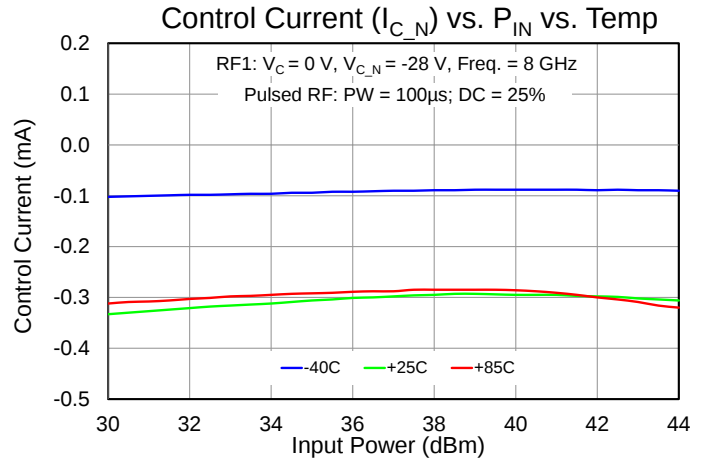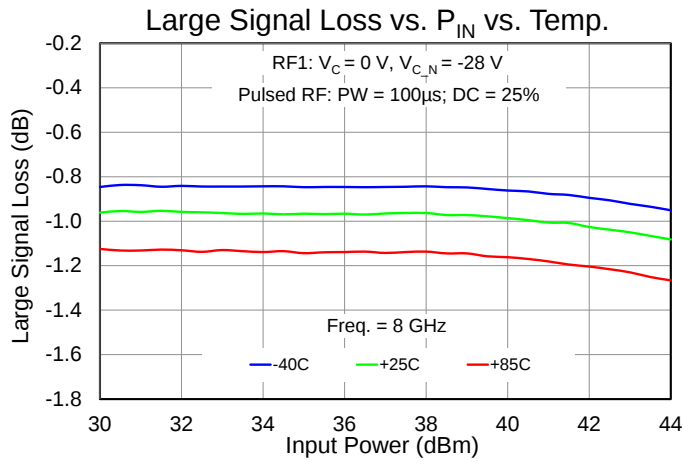





Performance Plots – Compression (Pulsed) RF1 Port

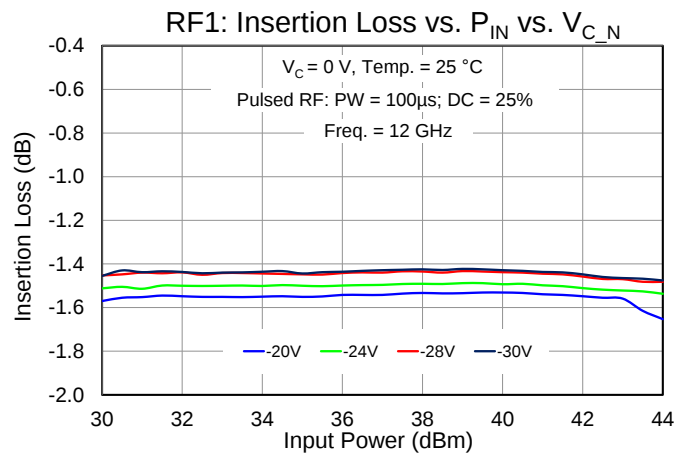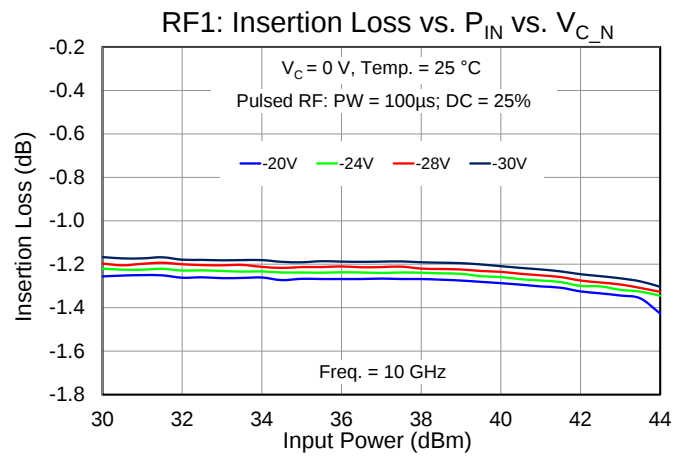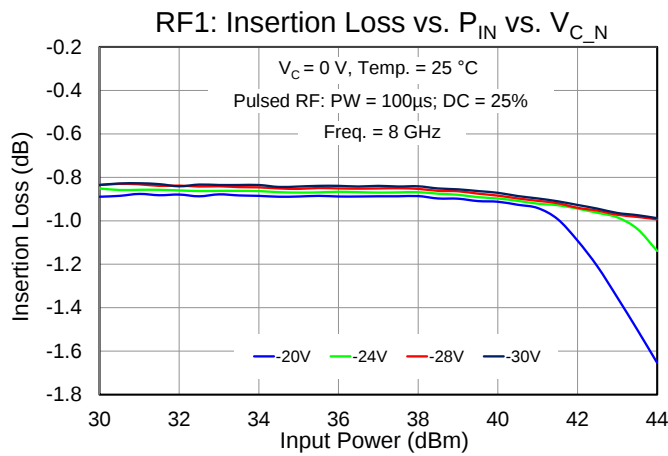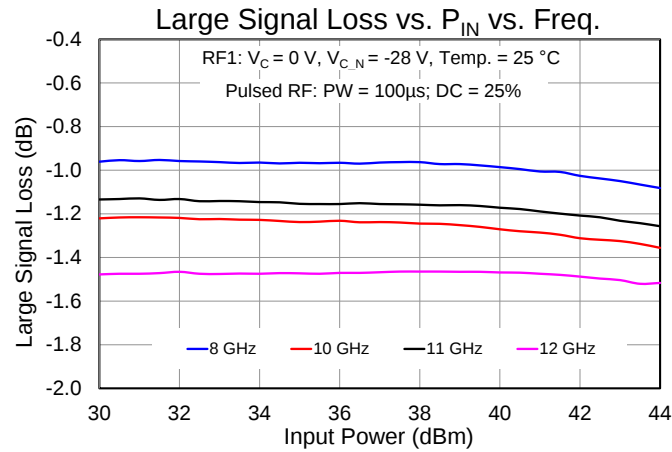







Performance Plots – Compression (Pulsed) RF2 Port

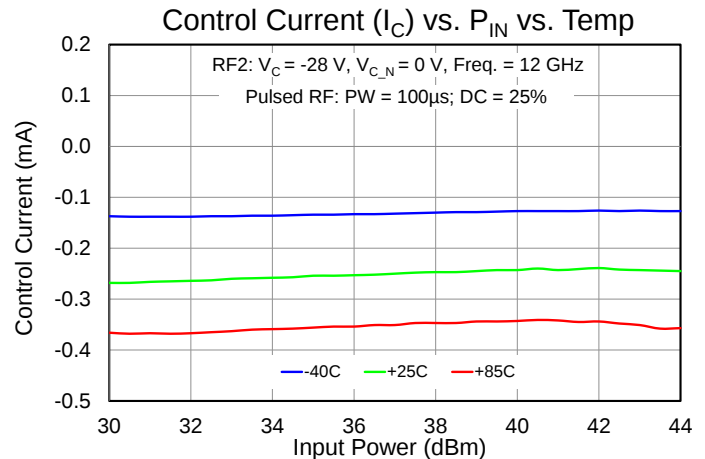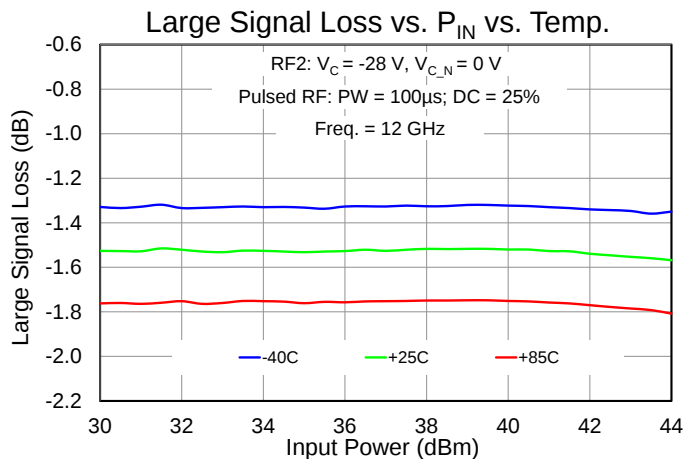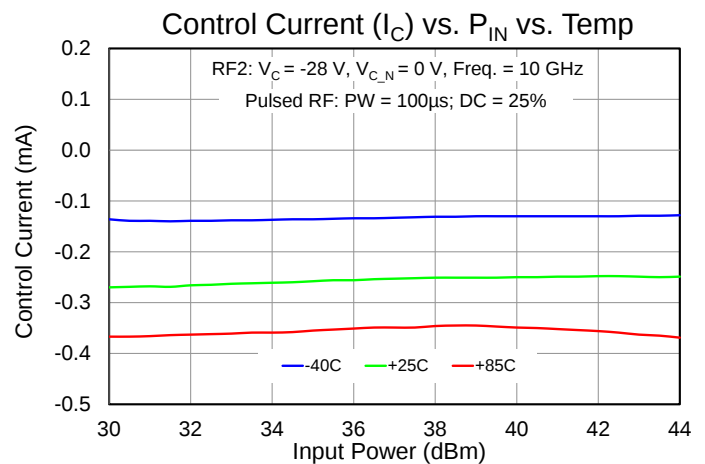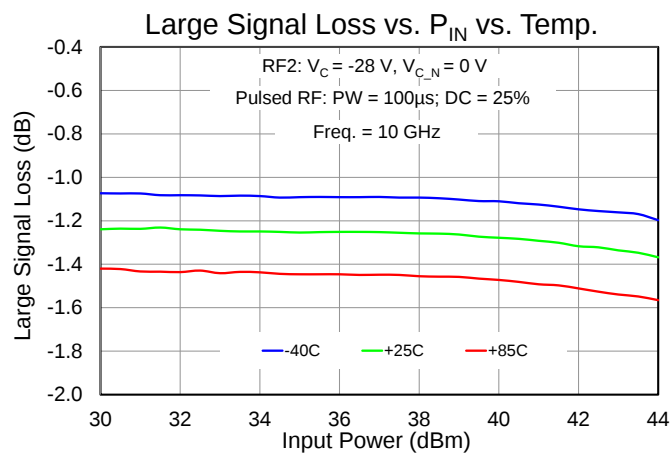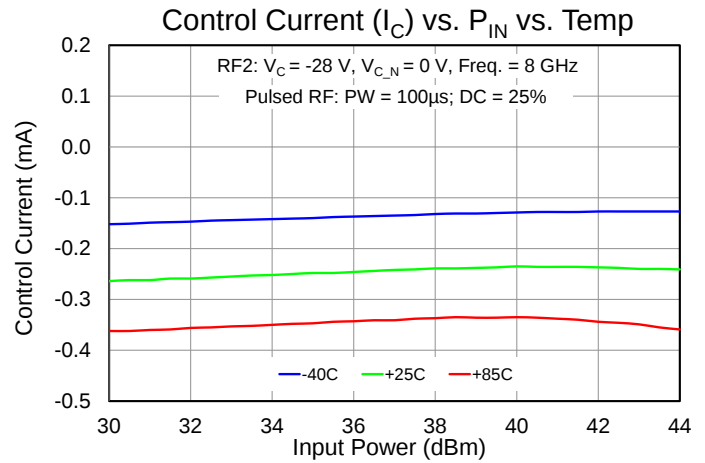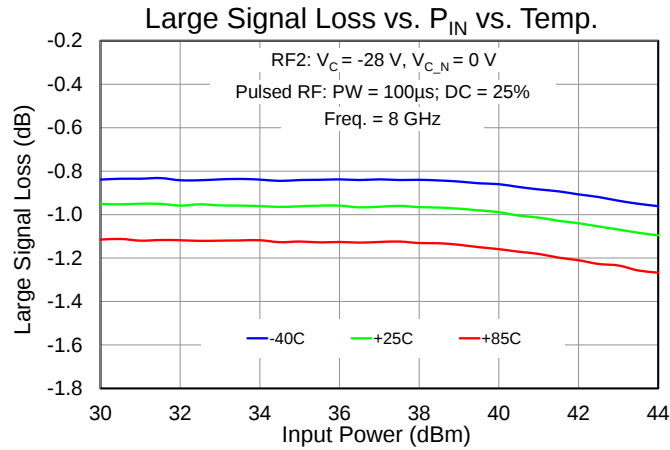


Performance Plots – Compression (Pulsed) RF2 Port

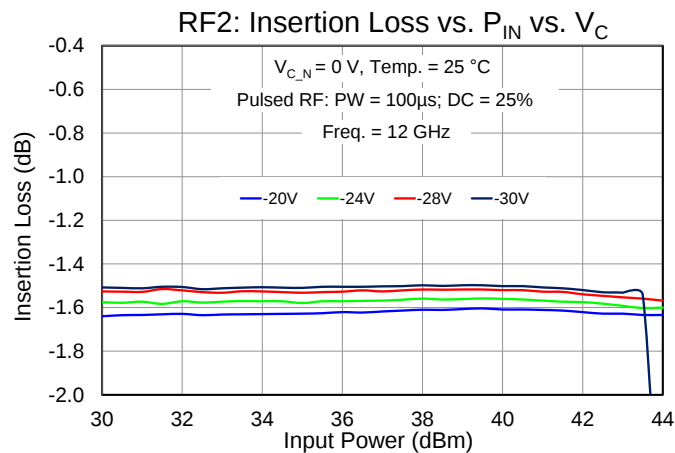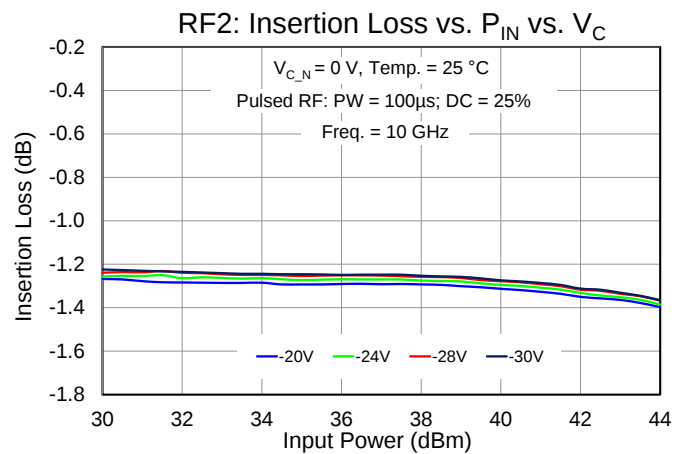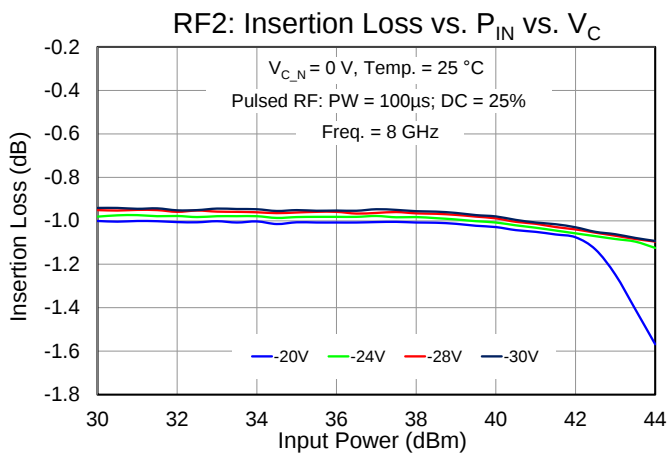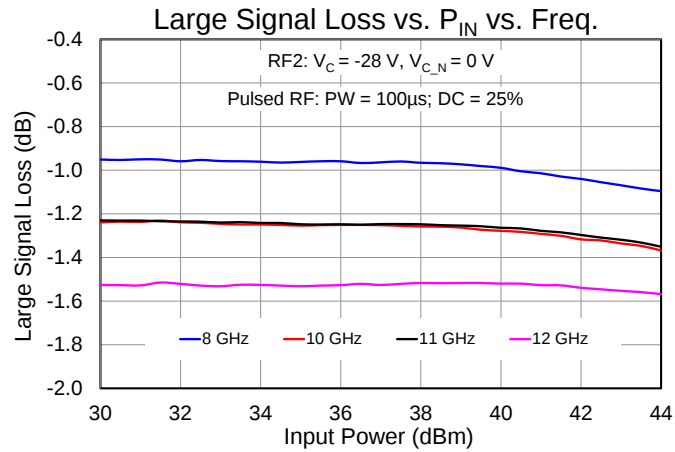

Performance Plots – Linearity

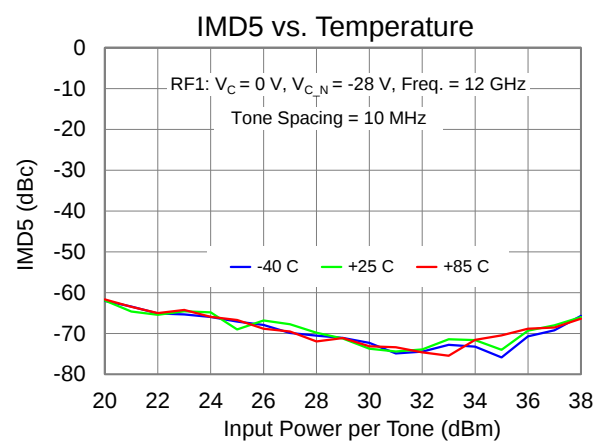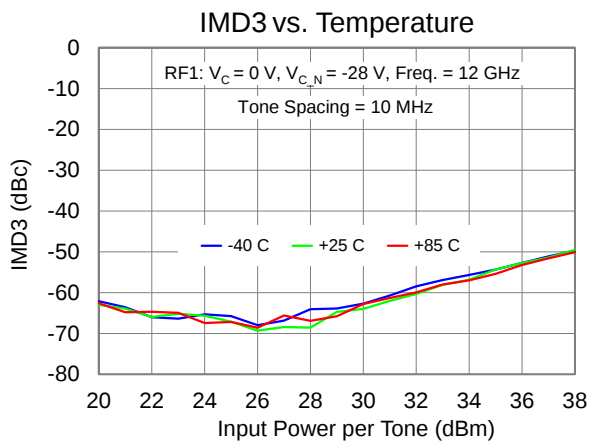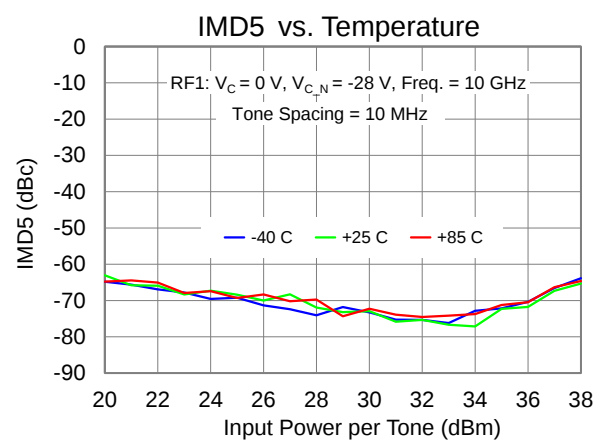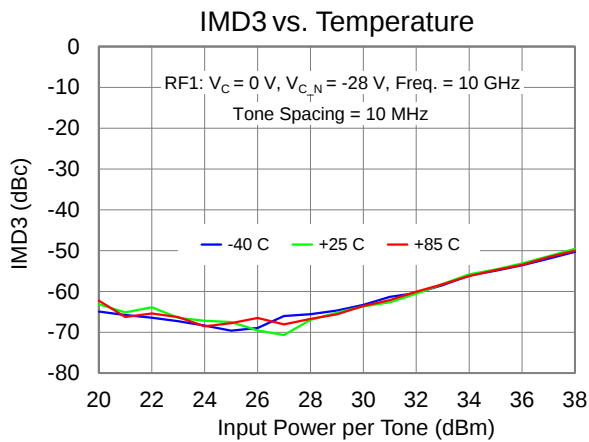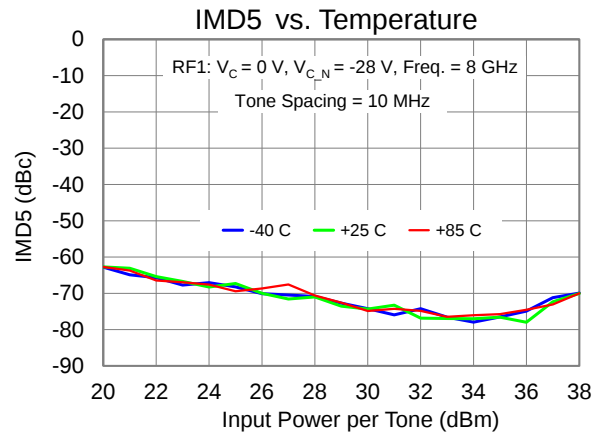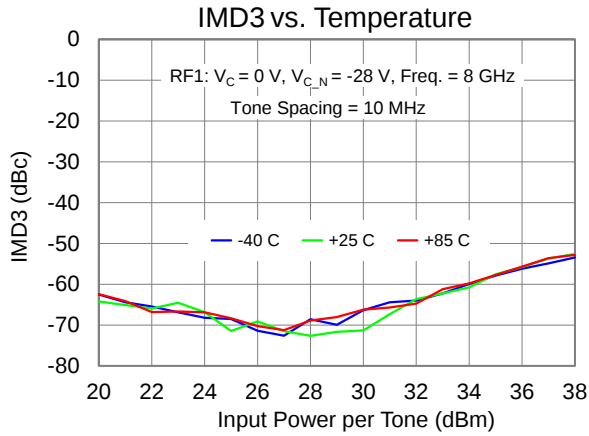

Application Circuit

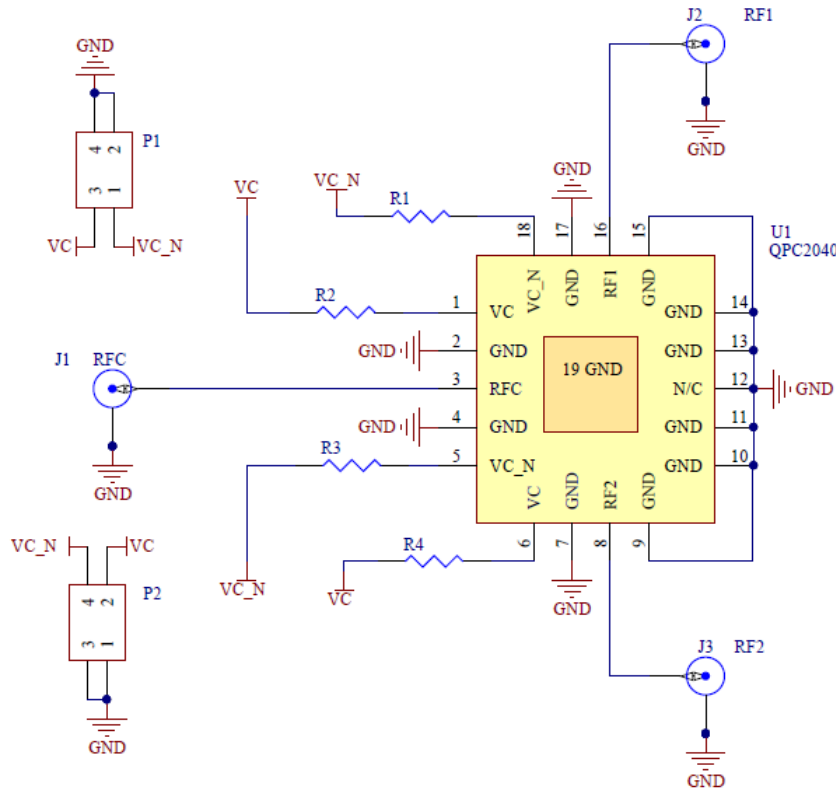

Notes:

1. This switch can be configured as a Single Pole, Single Throw (SPST) by terminating one unused RF switched port with a 50 Ohm load.
2. V_C can be biased from either pin 1 or 6 and the non-biased pin can be left open.
3. V_{C_N} can be biased from either pin 5 or 18 and the non-biased pin can be left open.
4. External components are not required

Bias Up Procedure

1. V_C or V_{C_N} set to 0 V (see Function Table for RF Path)
2. V_{C_N} or V_C set to -28 V (see Function Table for RF Path)
3. Apply RF signal to RF Input



Bias Up Down

1. Turn off RF supply
2. Turn V_{C_N} or V_C to 0 V
3. Turn V_C or V_{C_N} to 0 V

Function Table

RF Path	State	V_C	V_{C_N}
RFC to RF1 ON	On-State (Insertion Loss)	0 V	-28 V
	Off-State (Isolation)	-28 V	0 V
RFC to RF2 ON	On-State (Insertion Loss)	-28 V	0 V
	Off-State (Isolation)	0 V	-28 V

Evaluation Board (EVB) Assembly Layout.

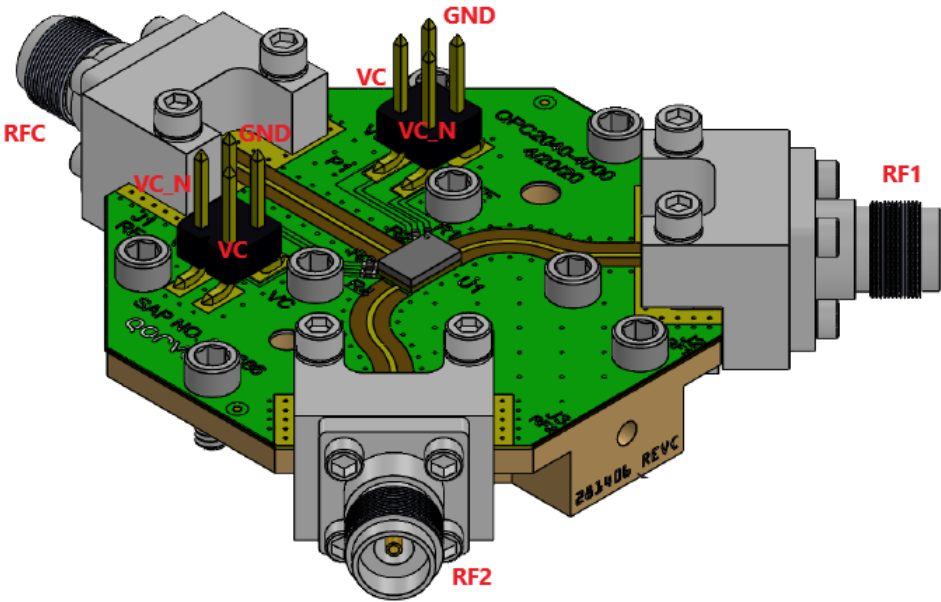


MOUNTING DETAIL

- Notes:
- 1. This switch can be configured as a Single Pole, Single Throw (SPST) by terminating one unused RF switched port with a 50 Ohm load.
 - 2. V_C can be biased from either top or bottom pin and the non-biased pin can be left open.
 - 3. V_{C_N} can be biased from either top or bottom pin and the non-biased pin can be left open.
 - 4. External components are required

Bill of Materials for EVB – QPC2040

Reference Des.	Value	Description	Manuf.	Part Number
R1, R2, R3, R4	1.1 K Ω	RES, 0402, 1%, 1/10 W	Various	–

Mechanical Information

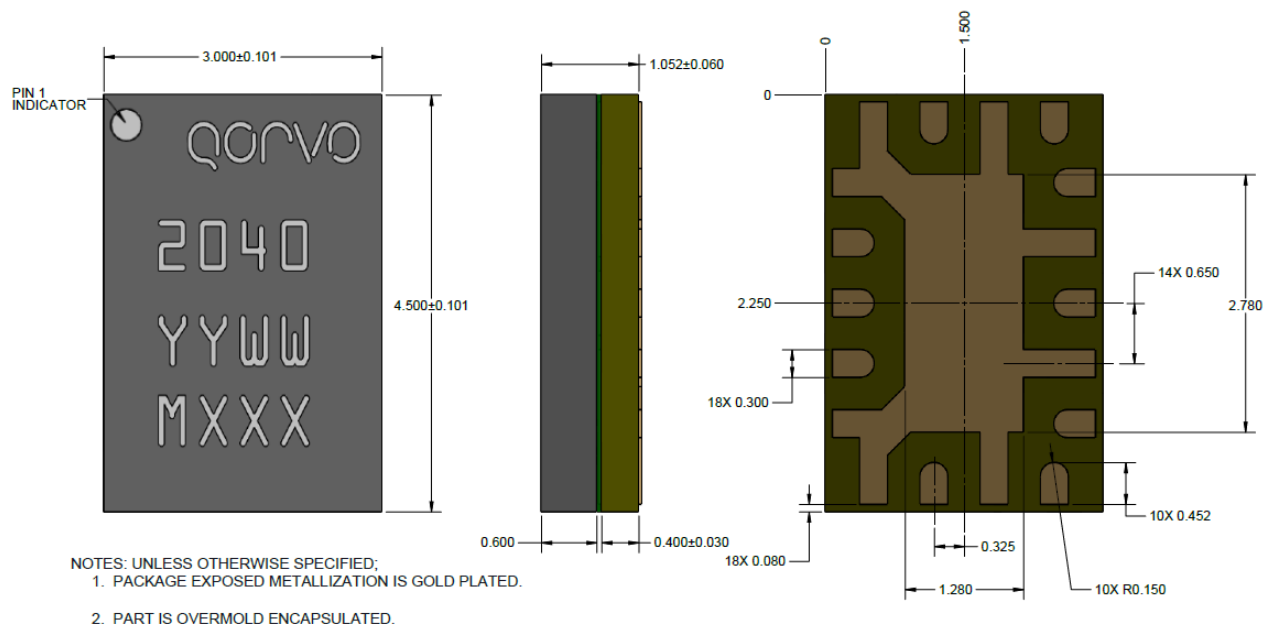

Units: millimeters

Tolerances: unless specified

x.xx = ± 0.25

x.xxx = ± 0.100

Materials:

Base: Laminate

Packaged Exposed Metallization is gold plated

Marking:


QPC2040: Part Number

YY: Part Assembly Year

WW: Part Assembly Week

MXXX: Batch ID

Package Layout

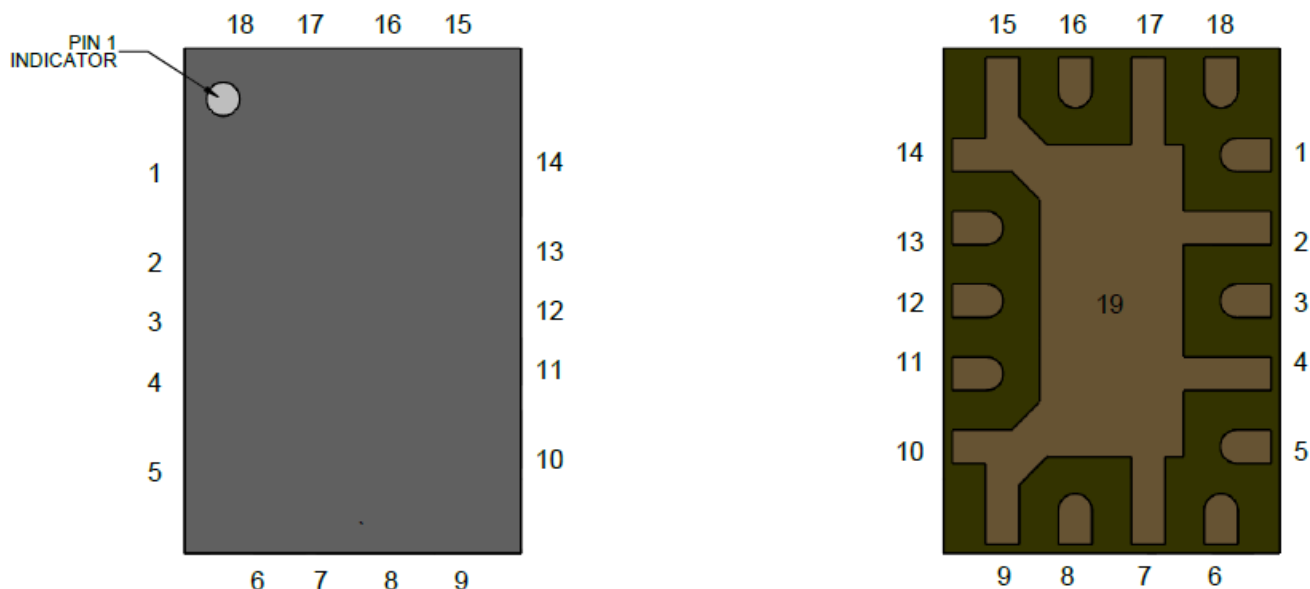


Pin Description

Pad No.	Symbol	Description
1, 6	V _C	Control voltage #1; External components are required
2, 4, 7, 9-11, 13-15, 17	GND	Ground. Connected to GND paddle (pin 19); should be grounded on PCB to improve isolation
3	RFC	RF common port (port 3); matched to 50 Ω; DC coupled
5, 18	V _{C_N}	Control voltage #2; External components are required
8	RF2	RF switched port 2; matched to 50 Ω; DC coupled
12	N/C	Not connected internally. Recommended to be grounded at EVB level
16	RF1	RF switched port 1; matched to 50 Ω; DC coupled
19	GND	Backside Paddle. Multiple vias should be employed to minimize inductance and thermal resistance.

Assembly Notes

1. Compatible with the latest version of J-STD-020, lead-free solder, 260° C, and tin/lead (245°C max. reflow temp.) soldering processes.
2. Contact plating: Thin Ni ENIG

Recommended Soldering Profile

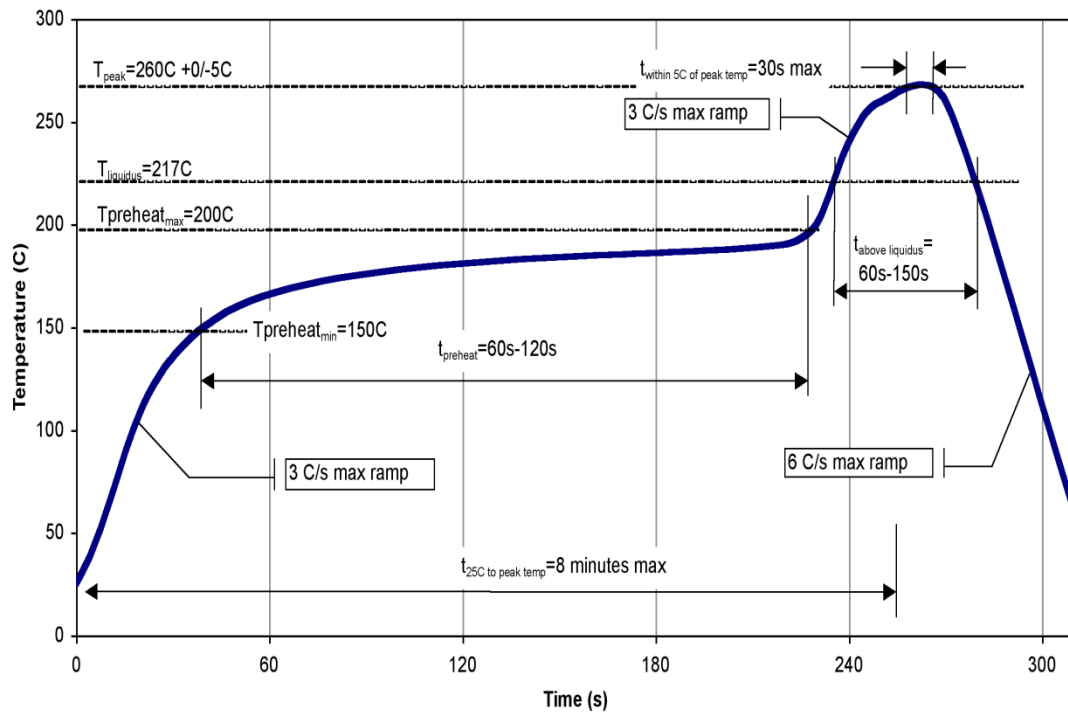

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1A	ESDA / JEDEC JS-001-2012
ESD – Charged Device Model (CDM)	Class C3	ESDA / JEDEC JS-002-2014
MSL – Convection Reflow 260 °C	Level 3	JEDEC standard IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein, or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, lifesaving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2020 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[QPC2040SR](#) [QPC2040EVB01](#) [QPC2040TR7](#)