

Panel Potentiometer

Model P09x Series



Features:

- 9 mm rotary
- Multi-ganged
- 100,000 cycle life
- Metal shaft / bushing
- Switch / push-lock option
- Concentric shaft option
- Center tap option

Model Styles Available

Side Adjust, PCB pins, up to 8 gangs	P09xN
Side Adjust, PCB pins, up to 8 gangs, with Switch	P09xS
Top Adjust, PCB pins, up to 2 gangs	P09x5N
Side Adjust, PCB pins, with Push-Lock, up to 2 gangs	P09xP
PCB pins, with Concentric Shaft	P09xC
PCB pins, with Center Tap	P09xT

Electrical

Resistance Range, Ohms	1K-500K
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	Taper B: 0.05W Other Tapers: .025W
Dielectric Strength	300Vac, 1 minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Gang Error (Multi-ganged)	-40dB – 0dB, ±3dB
Switch Contact Resistance	< 100 milliohms
Switch Power Rated	3.0A at 16Vdc

Mechanical

Total Mechanical Travel	300°± 10°
Static Stop Strength	50 oz-in
Rotational Torque	0.5 to 1.25 oz-in
Switch Rotational Angle, Maximum	50°


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Environmental

Operating Temperature Range	-40°C to +85°C
Rotational Life	100,000 cycles


Ordering

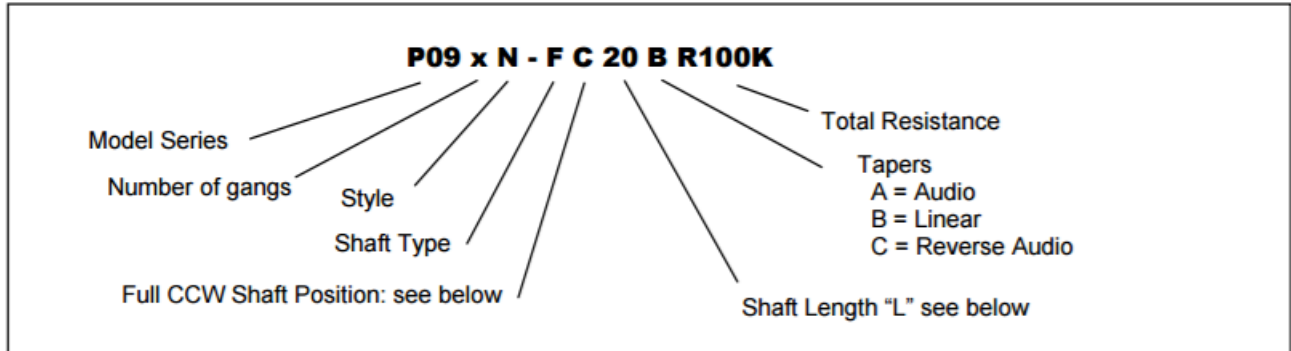

Shaft Types (P09xN, P09xS, P09x5N)

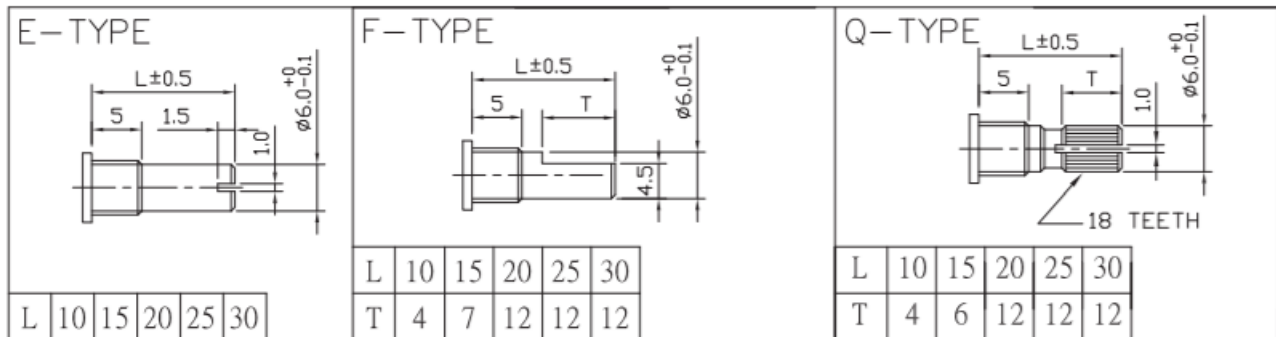


Shaft Types for Push-Lock (P09xP)

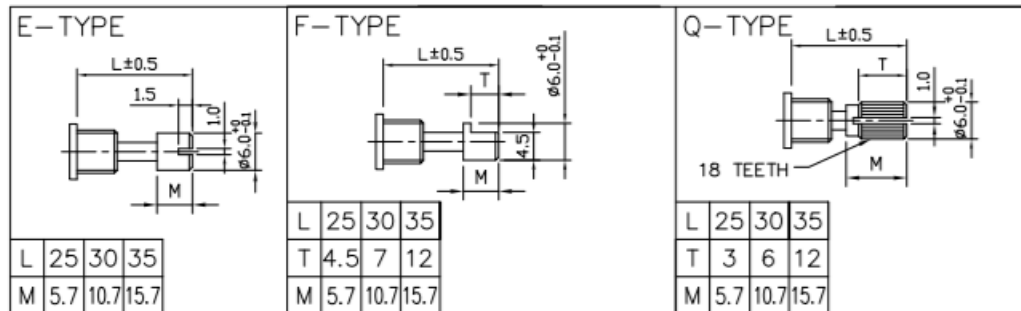

Shaft Position (F-Type Shaft)

Dashed lines on Type "C" and Type "A" shows position of adjustment slot for E-Type and Q-Type shafts

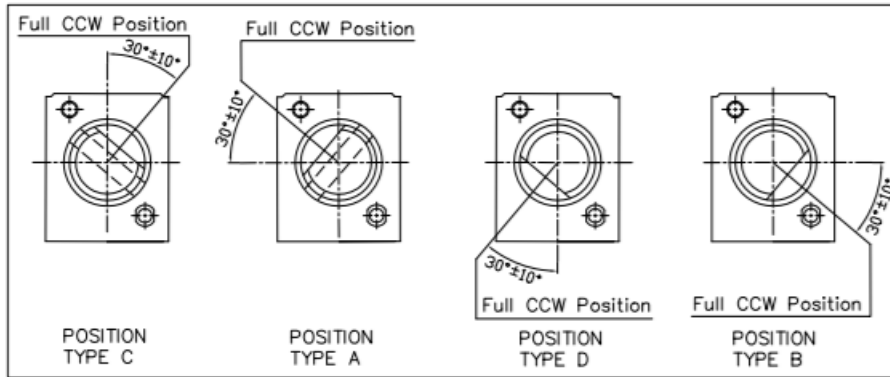


STANDARD RESISTANCE VALUES, OHMS

1K	2K	5K	10K	20K	50K	100K	200K	500K
----	----	----	-----	-----	-----	------	------	------

Outline Drawings

Model P09xN (Side Adjust, PCB pins, up to 8 gangs)

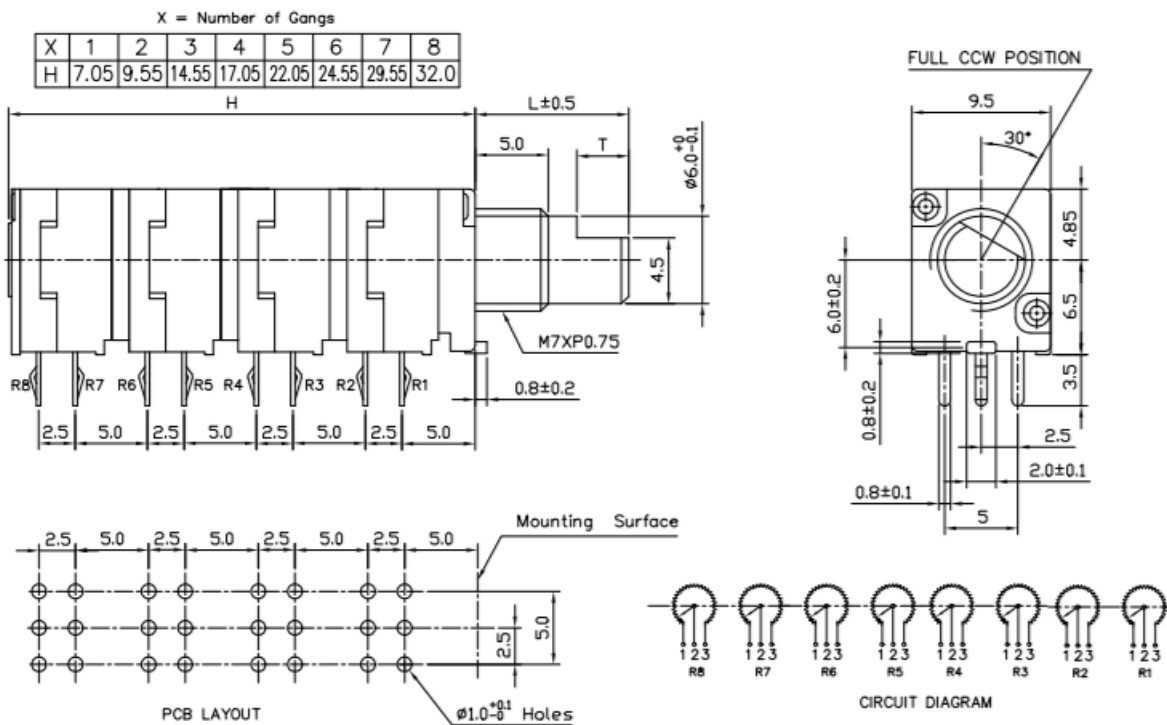


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | BI Technologies
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
 Ph: +1 714 447 2345
 www.ttelectronics.com/bi-technologies

Outline Drawings

Model P09xS (Side Adjust, PCB pins, up to 8 gangs, with Switch)

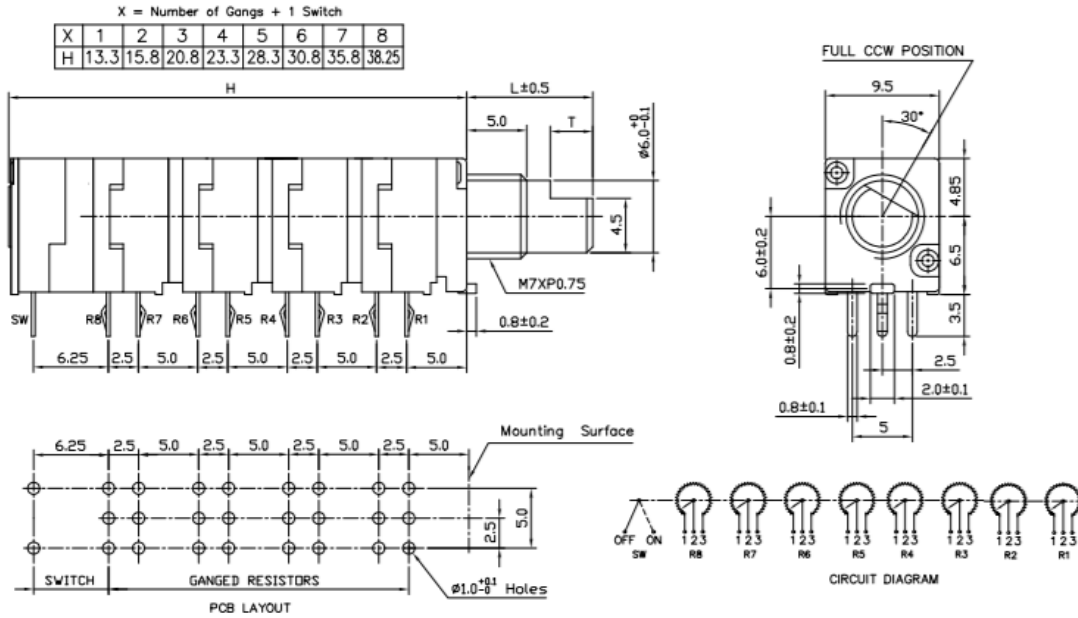

Model P09x5N (Top Adjust, PCB pins, up to 2 gangs)

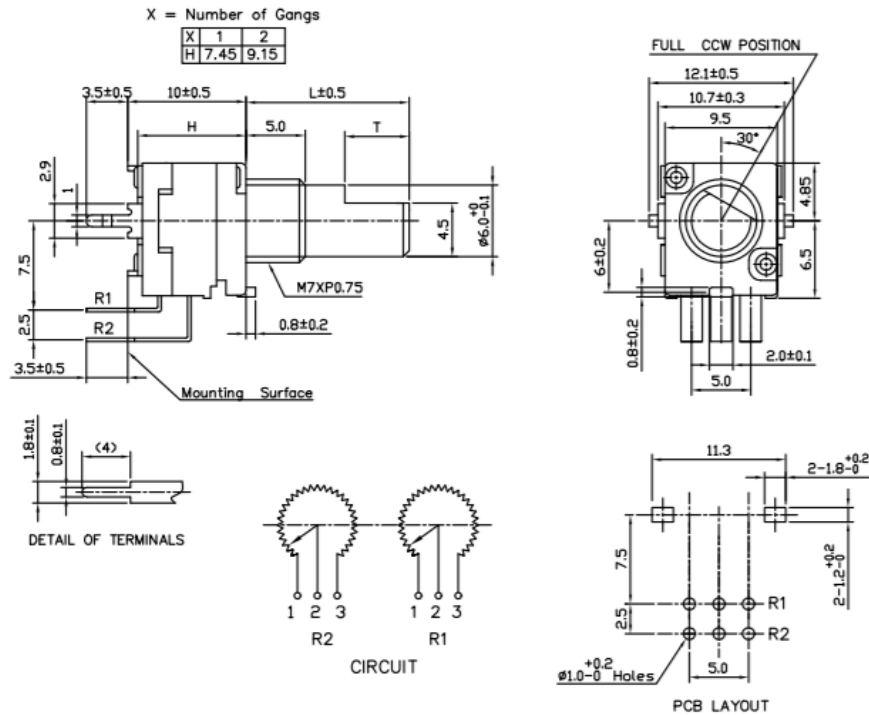


General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
 Ph: +1 714 447 2345
 www.ttelectronics.com/bi-technologies







Outline Drawings

Model P09xP (Side Adjust, PCB pins, with Push-Lock, up to 2 gangs)

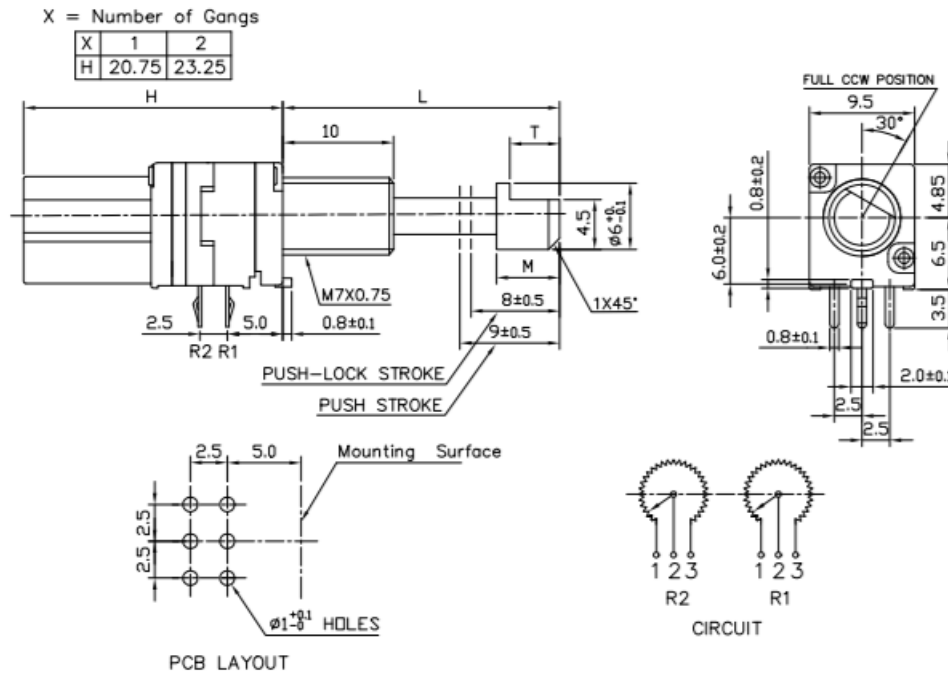


Outline Drawings

Model P09xC and P09xT (PCB pins with Concentric Shaft and Center Tap Options)
This Diagram shows both options
Please consult factory for details

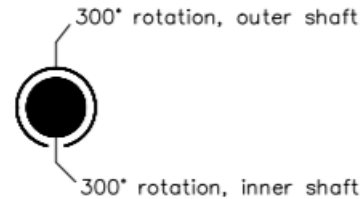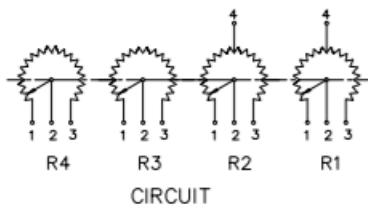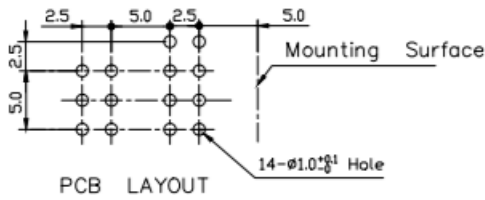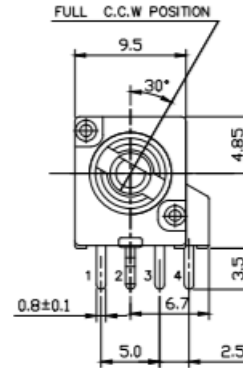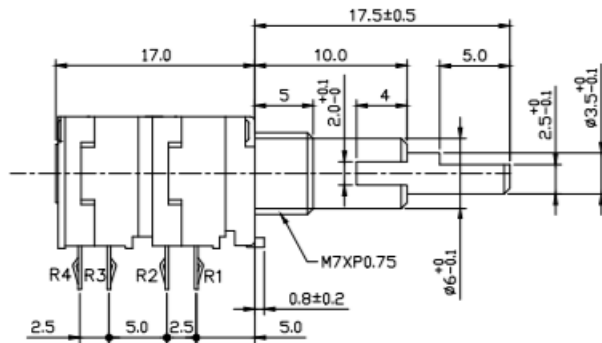

Panel Potentiometer

Model P09x Series

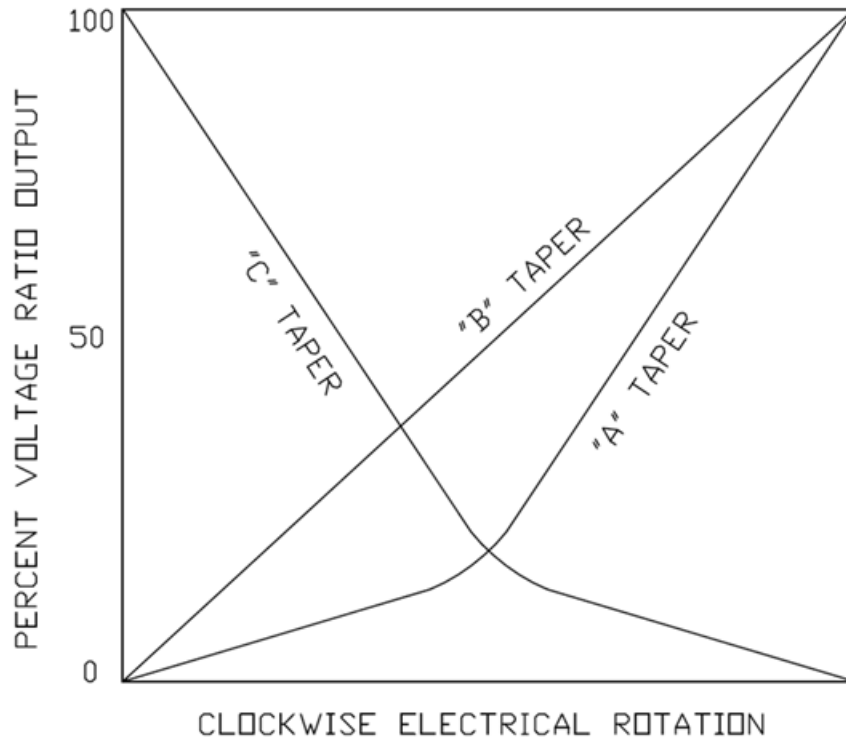

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Issue B 04/2019 Page 7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[P092N-QC20AR100K](#) [P092N-QC20BR100K](#) [P091P-EA25BR100K](#) [P092N-QC20AR20K](#) [P092N-QD15AR10K](#)
[P091S-EC20BR50K](#) [P092N-QC20BR20K](#) [P091P-FA25BR100K](#) [P092N-QC20AR10K](#) [P091P-QA25BR100K](#) [P092N-FC20AR20K](#) [P091N-FC25BR5K](#) [P091N-QC25BR50K](#) [P091P-FC25BR10K](#) [P091S-FC20BR10K](#) [P091S-QC15BR50K](#)
[P0915N-QC20BR5K](#) [P092N-QC15AR20K](#) [P0915N-FC20BR10K](#) [P0915N-FC20BR5K](#) [P0915N-EC15BR2K](#) [P0915N-EC15BR100K](#) [P0915N-EC15BR10K](#) [P091P-FC25CR50K](#) [P0915N-FC15AR10K](#) [P0915N-FC15BR50K](#) [P0915N-FC20BR50K](#) [P091P-FC25AR50K](#) [P091P-FC30AR50K](#) [P0925N-FC15AR10K](#) [P0925N-FC15BR50K](#) [P0925N-FD15BR50K](#) [P092N-EC15BR20K](#) [P092N-FC20B500K](#) [P092P-FC20AR5K](#) [P092P-FC25AR50K](#) [P092P-FC25AR5K](#) [P092P-FC30AR50K](#) [P092S-QC25AR10K](#) [P0915NFC15-AR500K](#) [P0915NFC15-BR25K](#) [P0915N-FC15AR50K](#) [P0915N-FC15BR10K](#) [P0925N-FC15CR500K](#) [P0915N-QC15BR100k](#) [P091N-FC25BR10K](#) [P091S-FC15BR10K](#) [P0915N-QC15AR10K](#) [P0915N-EC15BR50K](#) [P092N-FC25BR10K](#) [P092S-FC15AR10K](#) [P092N-QC15AR5K](#) [P091N-FC25BR1K](#) [P092N-FA15CR50K](#) [P092P-FC25AR100K](#) [P092N-FC25CR100K](#) [P0925N-FC15BR20K](#) [P091N-FC25AR500K](#) [P091N-FC25AR10K](#) [P091N-FC25A500K](#) [P092N-FC15AR50K](#) [P0915N-QC20BR50K](#) [P092N-QC15BR10K](#) [P092N-FC25AR20K](#) [P091N-QC15BR100K](#) [P092N-QC15BR100K](#) [P091N-FA15BR10K](#) [P092N-FC25AR100K](#) [P092N-FC15BR10K](#) [P091P-FC25CR2K](#) [P0915N-QC15AR100K](#) [P0925N-FC20AR100K](#) [P091N-FC15AR10K](#) [P092N-FC15AR100K](#) [P091N-FC25BR100K](#) [P092P-FC20AR100K](#) [P091N-FC20BR5K](#) [P092N-FC25BR100K](#) [P092N-FC15AR500K](#) [P0915N-QC15AR500K](#) [P091N-QC20BR50K](#) [P092N-FC15CR20K](#) [P094N-FC15AR50K](#) [P091N-FA20BR10K](#) [P0915N-QC15BR5K](#) [P092N-FC15BR20K](#) [P091S-FC20BR5K](#) [P092N-FA20CR50K](#) [P0925N-FA15AR100K](#) [P0925N-FC15AR5K](#) [P0915N-QC15AR50K](#) [P091N-QC15BR10K](#) [P092S-QC15BR50K](#) [P0925N-FA15AR200K](#) [P091N-FC25CR10K](#) [P094N-QD15AR20K](#) [P0915N-QC15BR50K](#) [P092N-FC25AR10K](#) [P092N-FC25BR20K](#) [P091P-FC25CR5K](#)