


CUSTOMER DRAWING

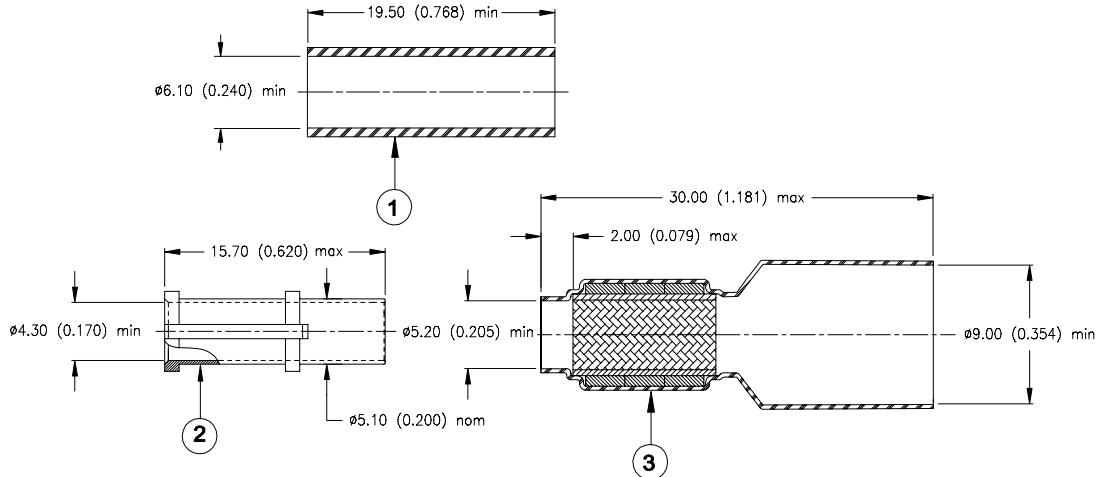


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
3. SOLDERSHIELD DEVICE:
 - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
 - Copper braid pre-tinned with Sn96Ag4 solder alloy with activated rosin flux.
 - Solder Preform: Sn96Ag4 solder alloy, with activated rosin flux.


APPLICATION

1. These parts are used on Tyco Electronics/Raychem Hexashield adapters.
2. Cable Type: Single or multi-conductors shielded cable: Raychem Spec 44 or Spec 55, single braid. (tin, silver or nickel-plated copper braid)
3. Temperature range: -65°C to +175°C.
4. For all other application, contact Tyco Electronics/Raychem technical service.

Cable dimensions:



Maximum quantity of braids: 4



Cable Dimensions				
̢A		̢B		̢C
Min.	Max.	Min.	Max.	Max.
4.30 (0.169)	8.90 (0.350)	3.50 (0.138)	6.20 (0.244)	4.20 (0.165)

PART NUMBERING

HET-A-04X

→ Ferrule Plating:

B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test.

C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

INSTALLATION

See Tyco Electronics/Raychem installation procedure RPIP-696-00.

			TITLE: FERRULE AND SOLDERSHIELD DEVICE FOR HEXASHIELD ADAPTERS			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: HET-A-04X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: A	DATE: 11-May-07		
DRAWN BY: K. YEE	CAGE CODE: 06090	REPLACES: D030535	ECO NUMBER: 07-010934	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2006-2007 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HET-A-04C](#)