Tight Spot SMA Wrench

SMA Connectors


Key Features

- · Ability to remove SMA connectors without removing the adjacent cables
- Small portable tool, fits in pocket
- Connect or disconnect SMA connectors in tight spaces
- Use in combination with torque wrench or just with fingers
- Protected by US Patent 9,027,447



Product Overview

The HT-Series wrenches allow for convenient and easy connecting or disconnecting of SMA cable connectors in tight spaces, with either a wrench or simply finger grip. The use of HT-Series accommodates most SMA cable width diameters.

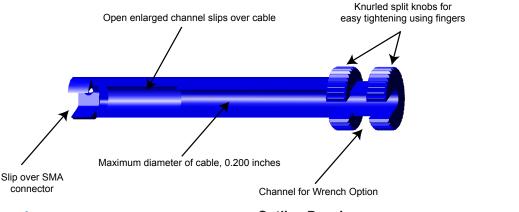

How to use the wrench

- 1. The open box wrench head is slid onto the hex nut as shown in figure-1.
- 2. The knurled split knobs are rotated to tighten or un-tighten the SMA cable nut by use of fingers. Alternatively, an open end wrench or a torque wrench can be used as shown in figure-2.


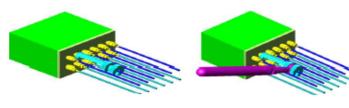


Figure-1

Figure-2

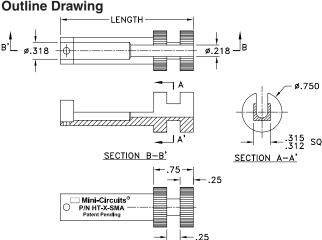

Outline Dimensions (inch)

Model No.	Case Style	Length	wt. grams
HT-2-SMA	MY-1E-004	2.50	13.2
		63.50	
HT-4-SMA	MY-1E-005	4.00	18.5
		101.60	
HT-8-SMA	MY-1E-008	8.00	34
		203.2	

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance oritoria and manual the parts covered by this specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are based on Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance oritoria and manual the specification document are subject to Mini-Circuit's applicable established test performance origination document are subject to Mini-Circuit's applicable established test performance origination document are subject to Mini-Circuit's applicable established test performance origination document are subject to Mini-Circuit's applicable established test performance or

- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

⊐Mini-Circuits

REV. D M175951 HT-SERIES BT/CP 190917 Page 1 of 1

HT-SERIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits: HT-4-SMA