



LTE BAND 28 COMPACT HELICAL SCREW MOUNT WITH SHELL ANTENNA

PART NUMBER: L000939-01

L000939-01 band 28, compact antennas are rugged, low-cost and easy to install. The antenna targets 698 to 803 MHz for cellular IoT (LTE-M, NB-IoT) applications/ traditional LTE Band 28/17/44, UMTS and GSM. Designed for embedded, inside-the-enclosure, applications, mounting directly to a printed circuit board (PCB) using a 6-32UNC screw. By eliminating the plastic housing, and the need for an RF connector on the PCB, the helical antenna family provides a low-cost but high-performing antenna solution.

The single frequency band of L000939-01 antennas makes the job of antenna selection simple, with better performance in the target frequency band than multiband antennas and rejection of signals from unwanted frequencies.

FEATURES & BENEFITS

- LTE band 28 helical screw mount with shell antenna targets 698 MHz to 803 MHz for Cellular IoT (LTE-M, NB-IoT) applications/ traditional LTE Band 28/17/44 , UMTS and GSM.
- Designed for embedded, inside-the-enclosure, applications, mounting directly to a printed circuit board (PCB) using a 6-32UNC screw-mount connection.
- By eliminating the plastic housing and the need for an RF connector on the PCB.
- The following data is based on 41 x 90 x 1.6mm ground size
- No matching circuits required.

RF SPECIFICATIONS

Frequency Range (MHz)	698-803
VSWR	< 3.4:1
Average Efficiency	59%
Peak Gain	1.0 dBi
Average Gain	-2.3 dBi
Feed Point Impedance	50 ohms
Polarization	Linear polarization


MECHANICAL SPECIFICATIONS

Size (L x W x H) without screw	50.3 mm x Φ 10.5 mm (L / D \pm 0.3)
Weight	< 10 g
Mounting	Screw mount 6-32UNC
Mating Connector	N/A
Cable	N/A
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Dielectric Material	Phosphor Bronze/ Brass C3604 / ABS
Hazardous Materials	N/A


RF DATA

(shown as L000939-01 : Ground size : 41 x 90 x 1.6 mm).


VSWR

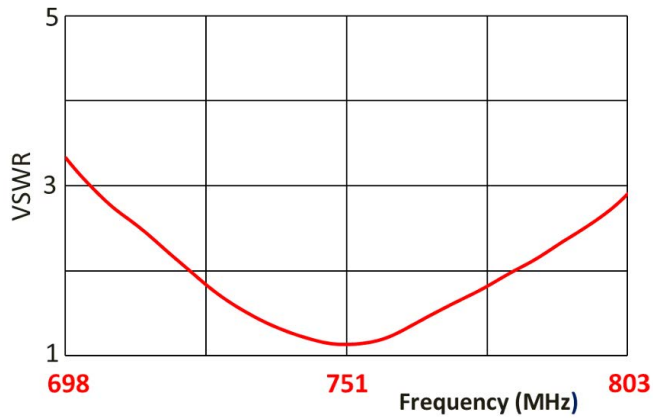


Return Loss

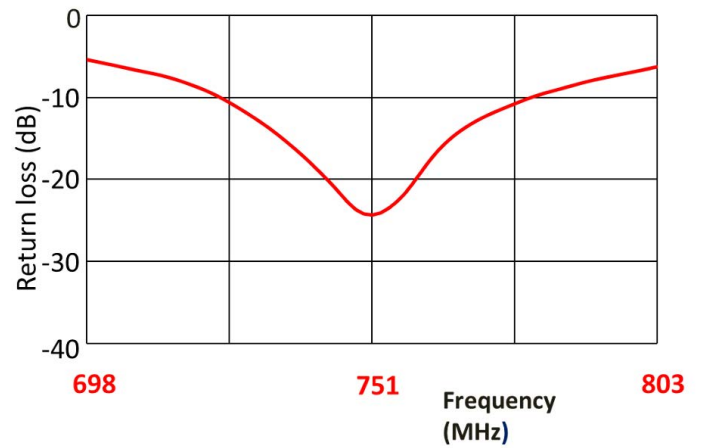

Peak Gain

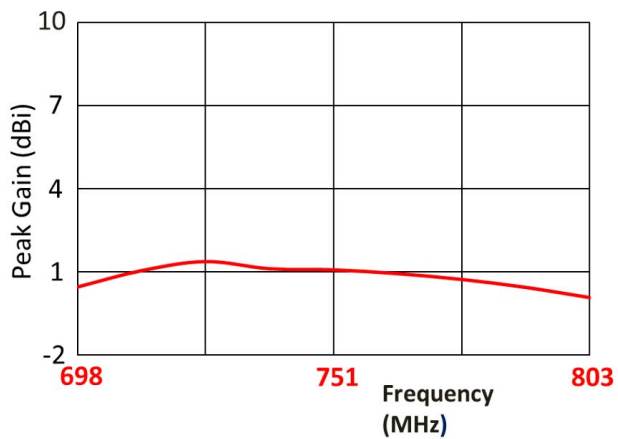

Efficiency

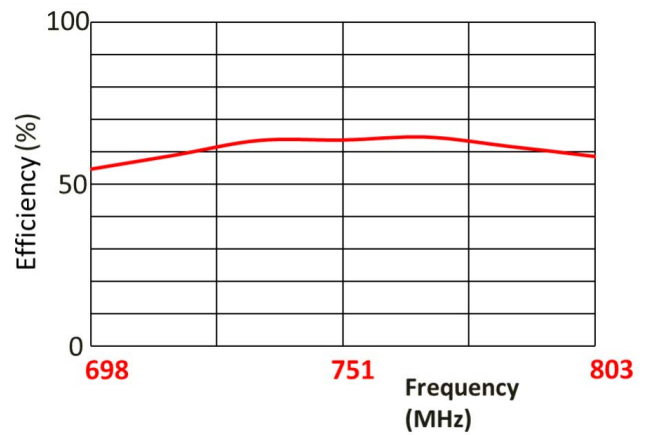


Data measured in free space and on reference ground plane of 41 x 90 x 1.6 mm ground plane condition, application data might vary.


RADIATION PATTERN

(shown as L000XXX-80 : Ground size : 41 x 90 x 1.6 mm).


Test setup

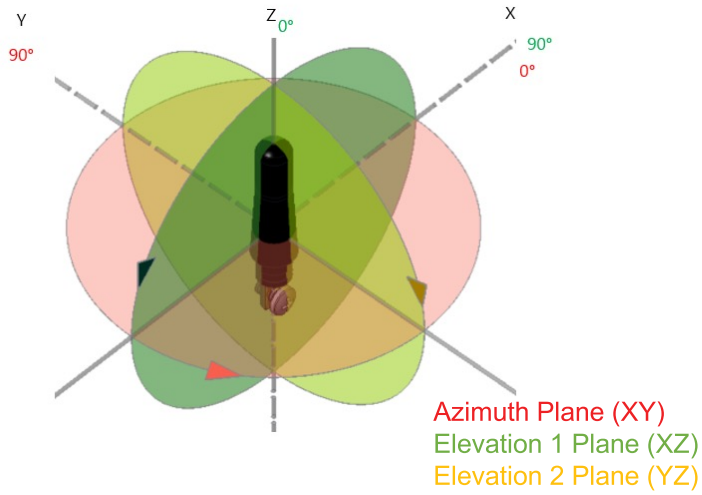


Azimuth (XY)

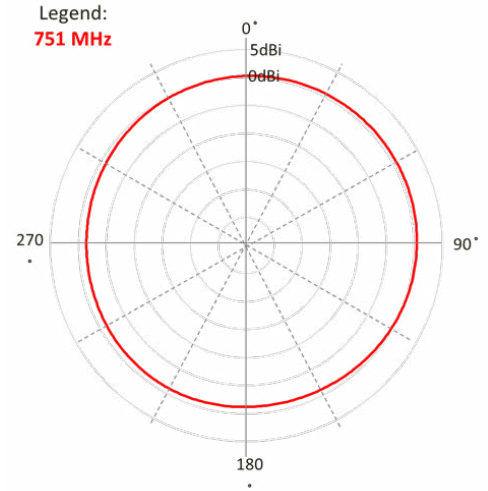

Elevation 1(XZ)

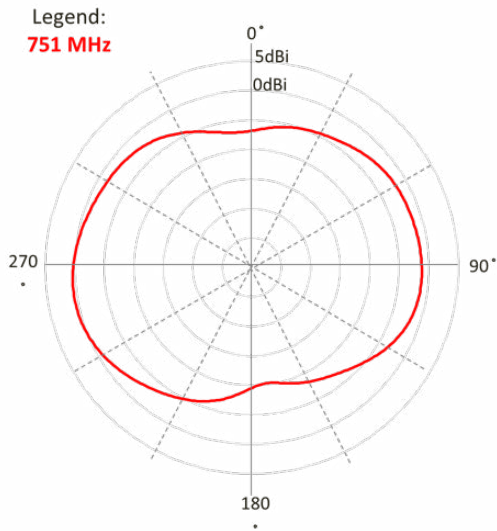

Elevation 2(YZ)

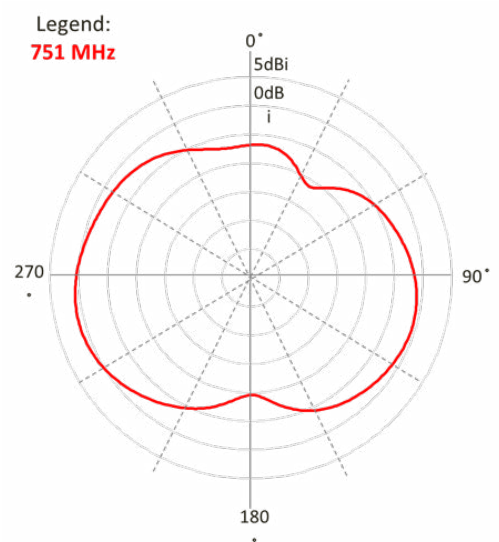


Data measured in free space and on reference ground plane of 41 x 90 x 1.6 mm ground plane condition, application data might vary.

LTE BAND 28 COMPACT HELICAL SCREW MOUNT WITH SHELL

Standard Antenna Solutions

KEEP OUT AREA

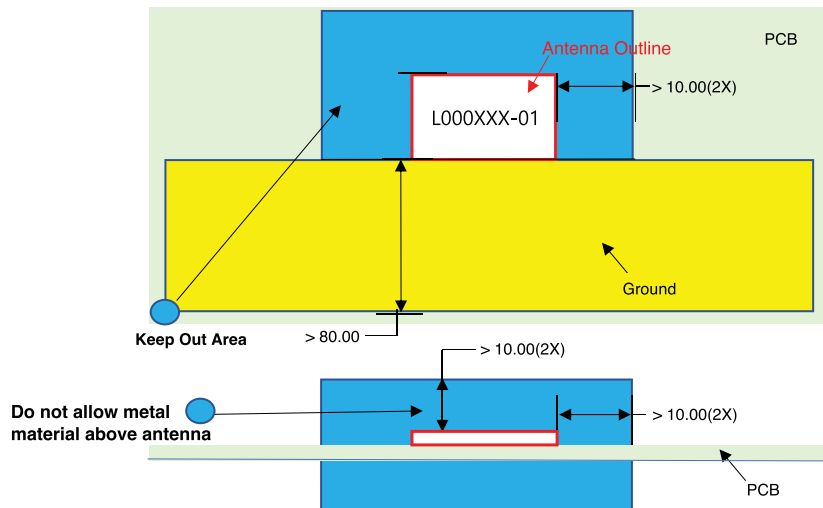


NOTES

1. Antenna designed to be screw mounted on PCB.
2. Area in blue indicates Keep Out Area.
3. For more information please call TE.

Dimension: mm

Diagram is not to scale

DIMENSIONS

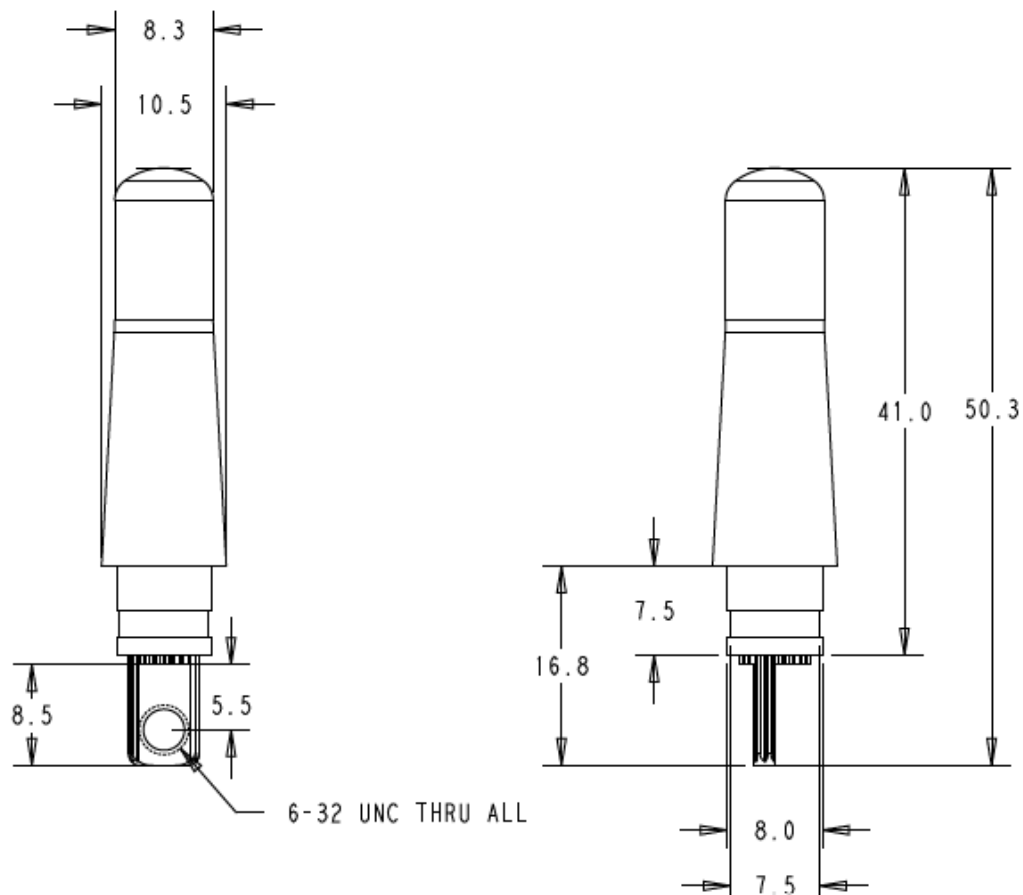


Dimension: mm

Diagram is not to scale

LTE BAND 28 COMPACT HELICAL SCREW MOUNT WITH SHELL

Standard Antenna Solutions

PACKAGING

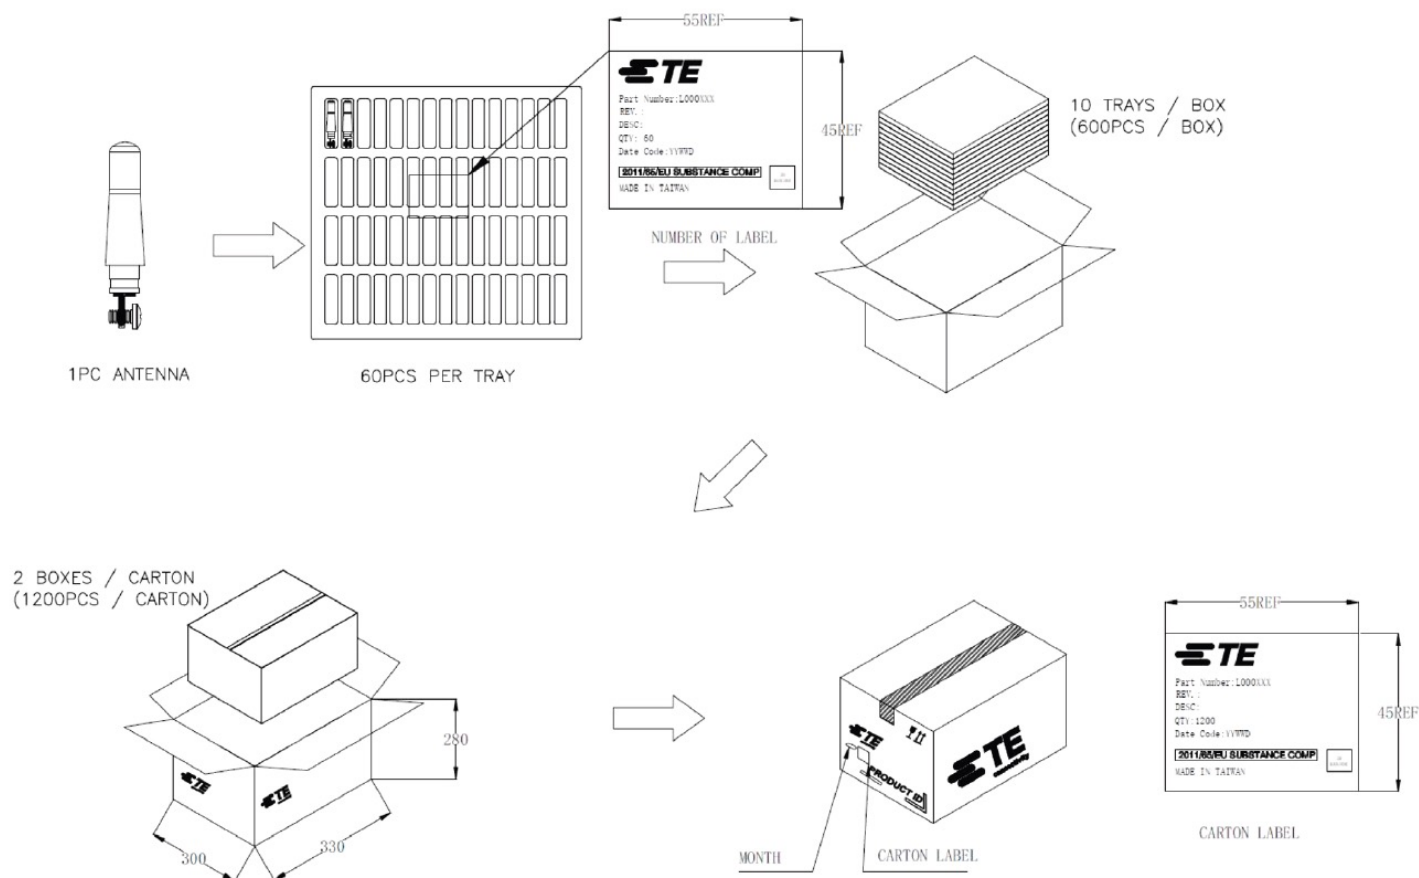

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

For phone numbers in other countries, go to te.com/support-center

te.com

TE, TE Connectivity and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2024 TE Connectivity. All Rights Reserved.

Published 05-24

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[L000939-01](#)