

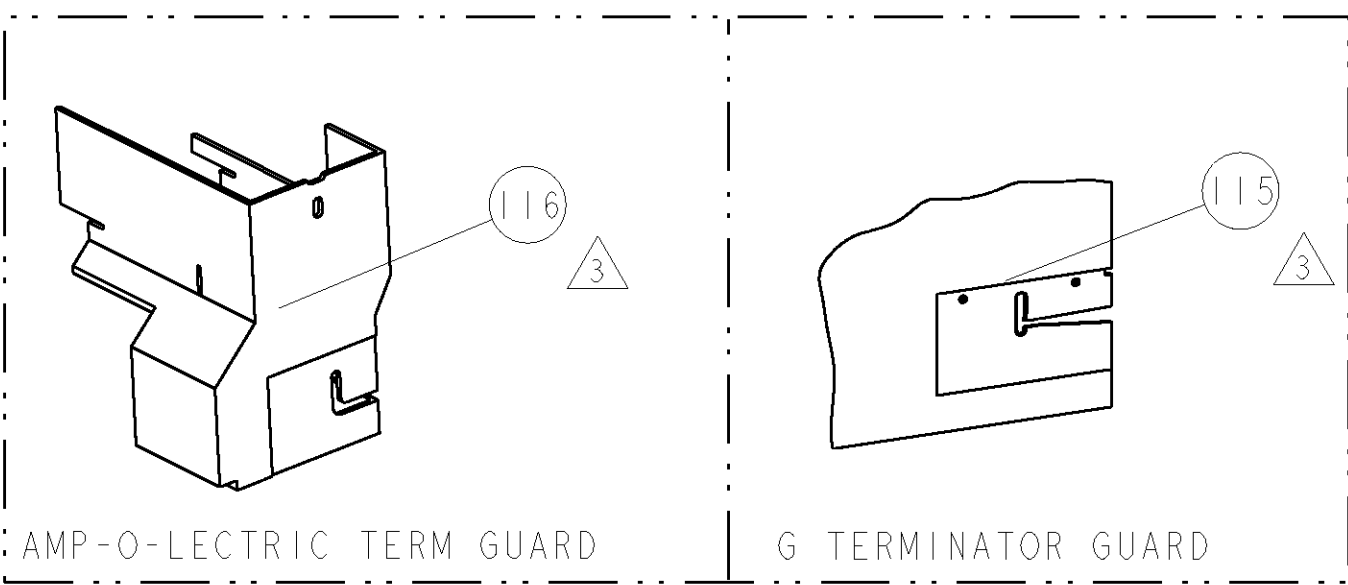
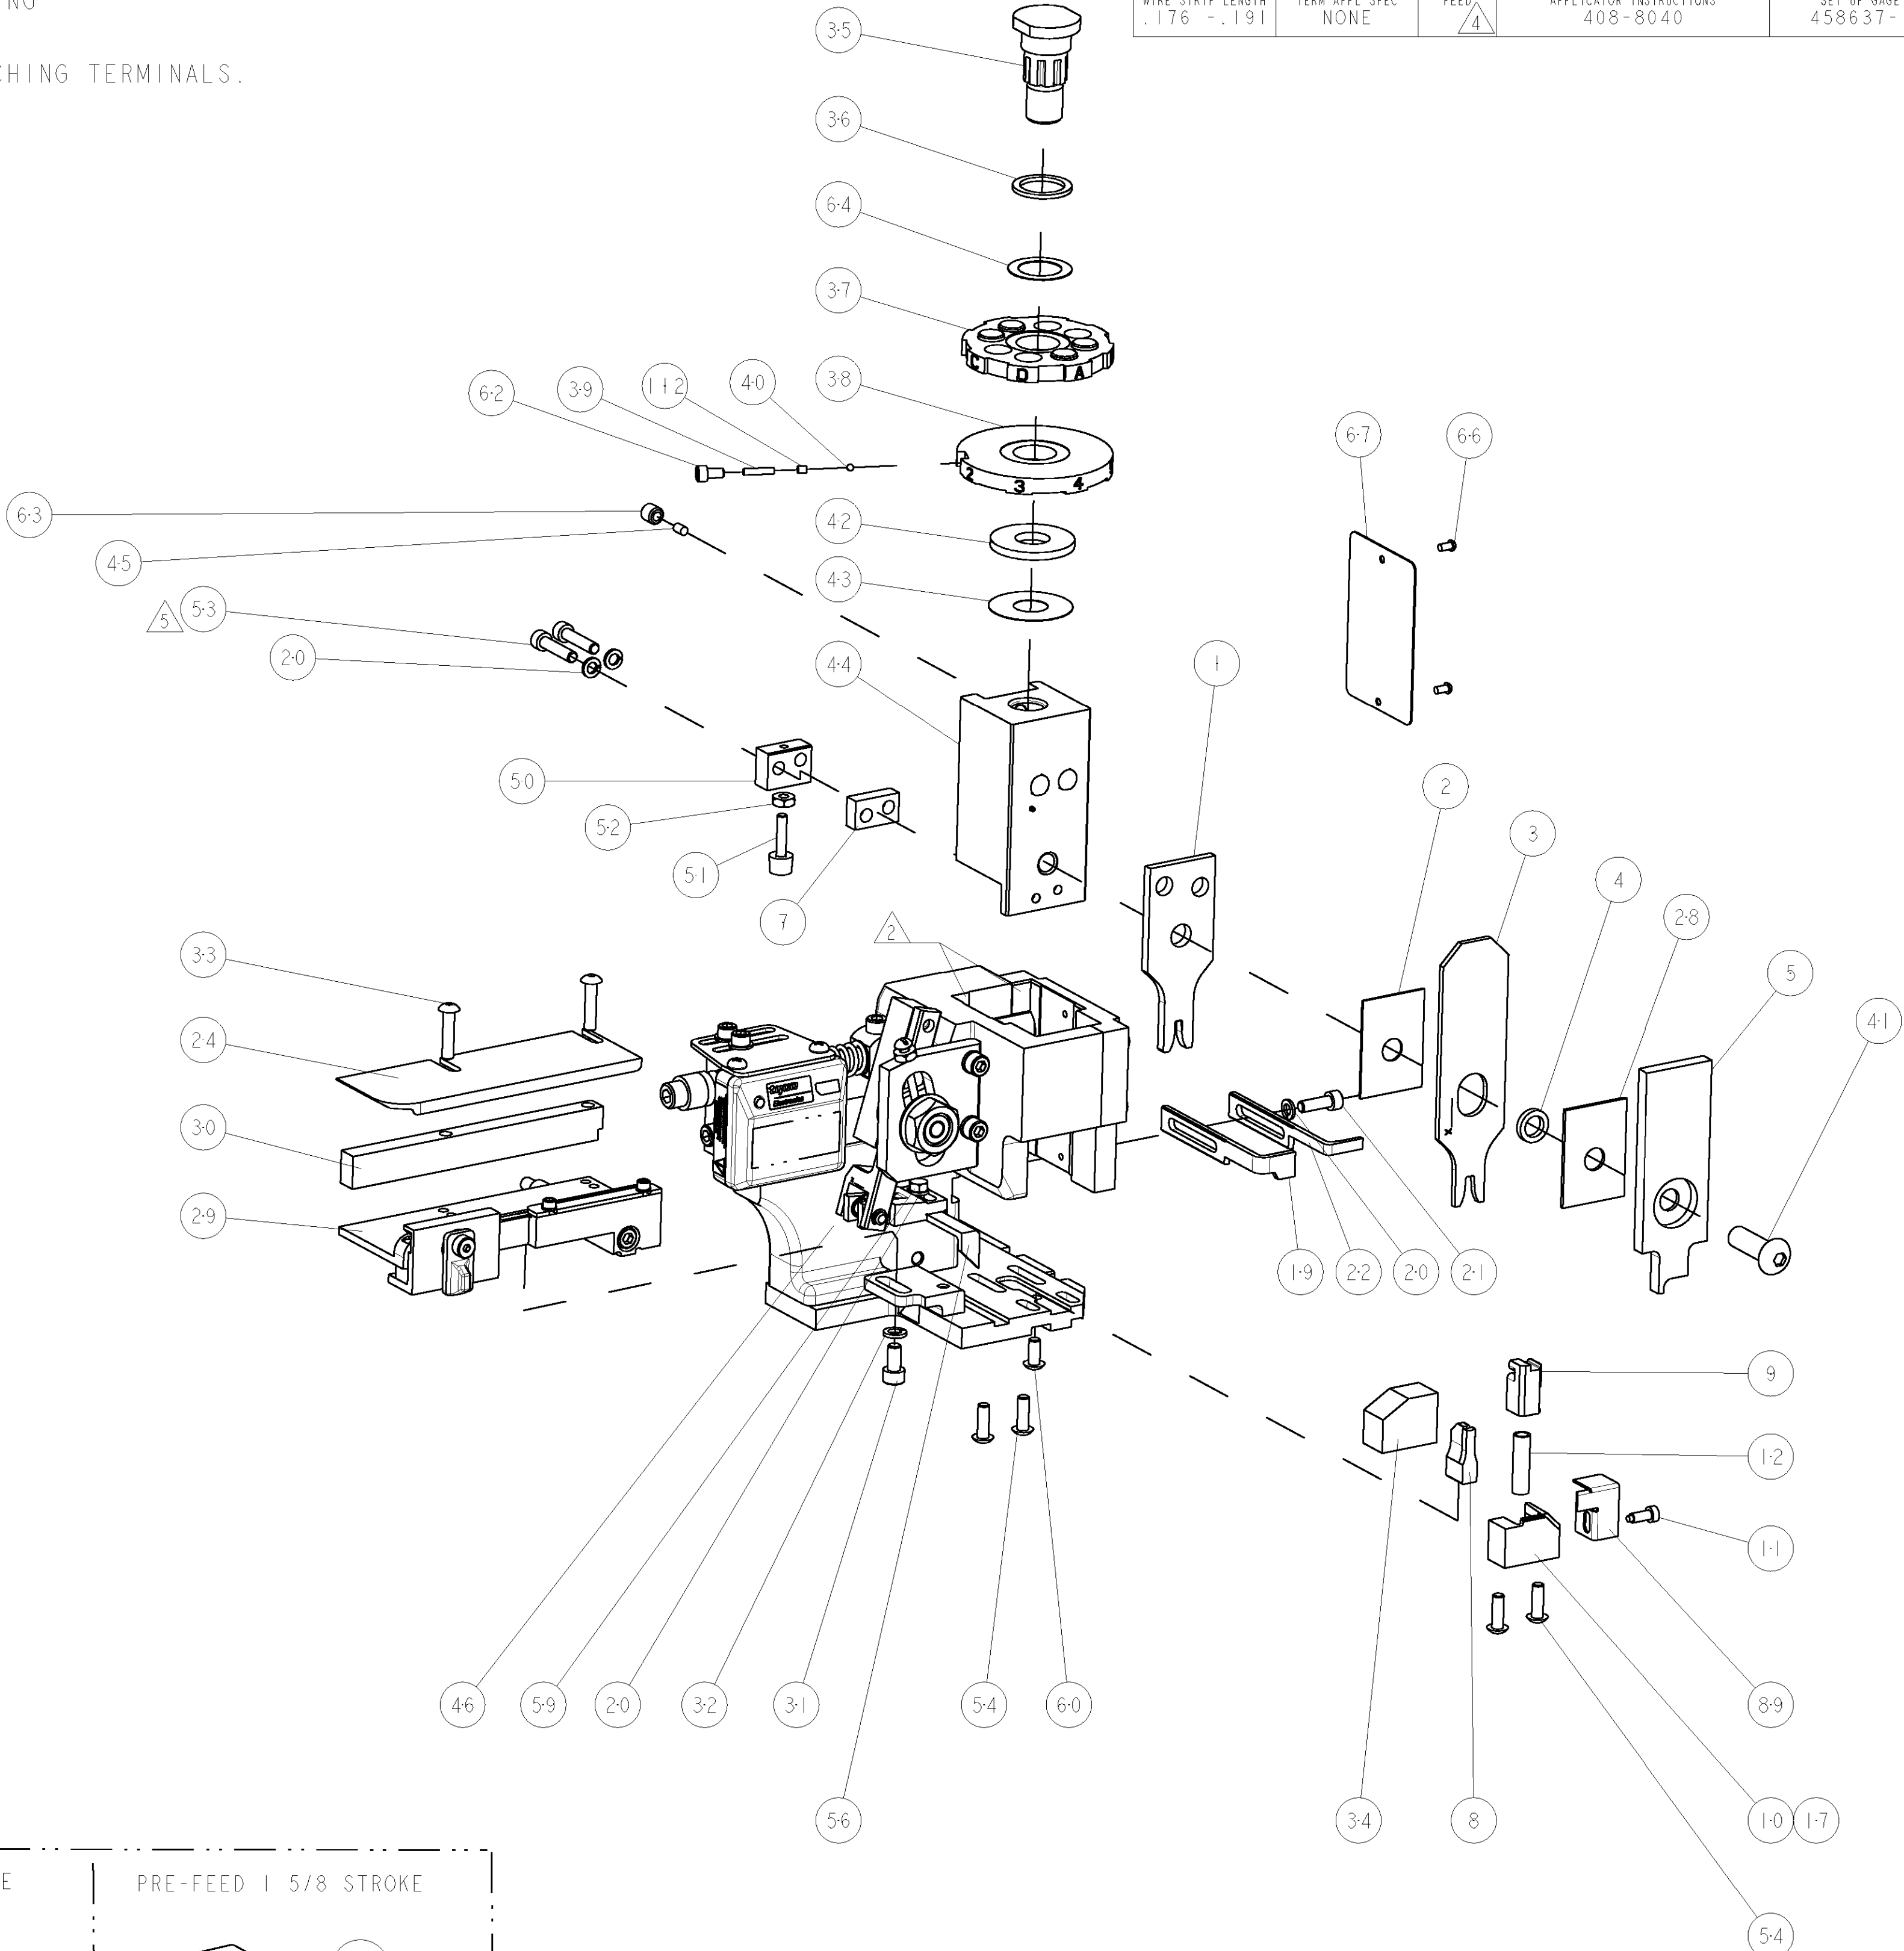
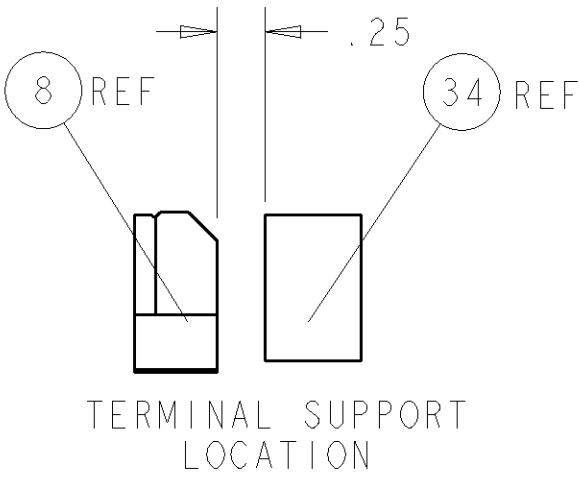


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER	REV	FIRST USED	POWER UNIT		FEED TYPE	DESCRIPTION	
1852360-1	A	122500-1	LEADMAKER		POST FEED	CUTS CARRIER	
1852360-2	A	565435-5	BENCH MODEL K		PRE FEED	CUTS CARRIER	
1852360-3	A	354500-1	BENCH MODEL G		PRE FEED	CUTS CARRIER	
1852360-6	A	122500-1	LEADMAKER		POST FEED	CONTINUOUS CARRIER	
7-1852360-7	A	-	-		-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ FEED ADJUSTMENT REQUIRED WHEN SWITCHING TERMINALS.
PIN = .476
SOCKET = .698
- △ CUT TO LENGTH AT ASSEMBLY.

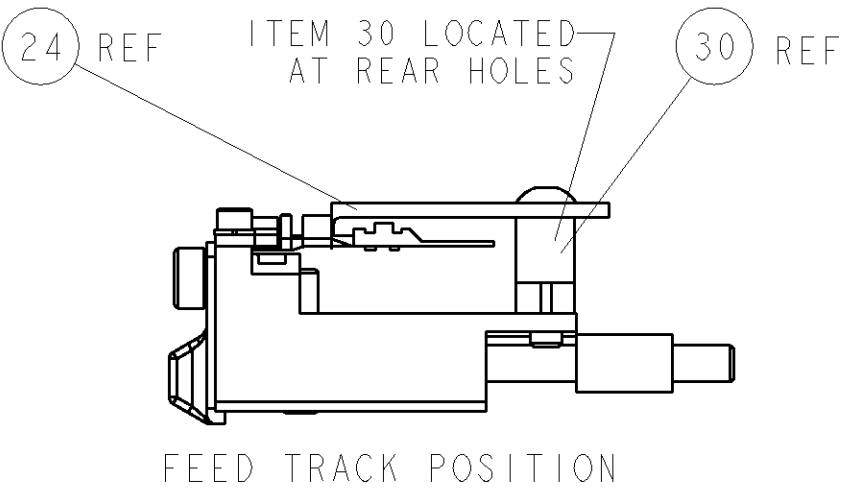

TERMINAL NAME: TERMINAL					
TYCO PN	SUMITOMO PN	SUMITOMO TERMINAL - AMP CRIMP SPECS			
PIN	-				
1949192	8100-4414	PAD LTR	CRIMP HEIGHT		WIRE SIZE
-	-	A	.078±.002[1.98±0.05mm]		3.0mm2
SOCKET	-	B	.066±.002[1.68±0.05mm]		2.0mm2
1949193	8100-4445	C	-		-
-	-	D	-		-
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.110 [2.79mm]	F	2.0-3.0mm2
-	-	INSUL	.150 [3.81mm]	F	Ø.130 MAX
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPLICATOR INSTRUCTIONS		SET UP GAGE
.176 - .191	NONE	4	408-8040		458637-1

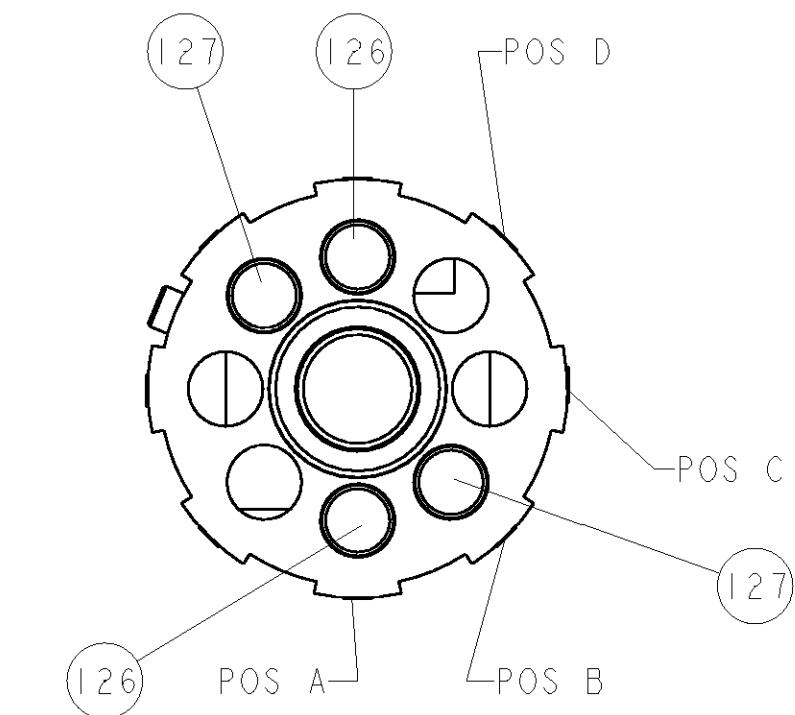

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852360-6](#)