

Power Resistor for Mounting onto a Heatsink Thick Film Technology



DESIGN SUPPORT TOOLS AVAILABLE




FEATURES

- Compliant with requirement #26 of NF-EN45545-2
- High power rating: 500 W
- High overload capability up to 2 times rated power (see energy curve)
- Heatsink mounting
- Low thermal radiation of the case
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

This range has been developed specifically for electrical traction applications and is capable of dissipating 500 W at +70 °C. The remarkable performance characteristics are evident when used in severe pulse conditions. The copper base allows easy mounting on the heatsink and provides optimal dissipation conditions.

DIMENSIONS in millimeters

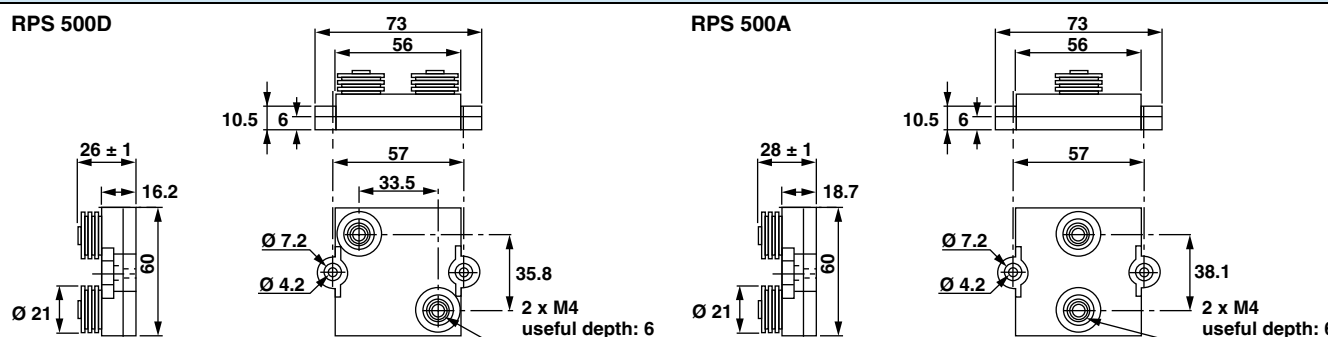

Note

- Tolerances unless stated: ± 0.2 mm

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE	RESISTANCE RANGE Ω	RATED POWER $P_{25^\circ\text{C}}$ W	LIMITING ELEMENT VOLTAGE U_L V	TOLERANCE $\pm \%$	TEMPERATURE COEFFICIENT $\pm \text{ppm}/^\circ\text{C}$
RPS 500	500	0.24 to 1M ⁽¹⁾	500	5000	1, 2, 5, 10	150

Note

⁽¹⁾ E24 series

MECHANICAL SPECIFICATIONS

Mechanical Protection	Insulated case and resin for potting UL 94 V-0
Resistive Element	Cermet
Substrate	Alumina onto base of nickel coated copper
End Connections	Screws M4 (M5 on request)
Weight	250 g $\pm 10 \%$
Tightening Torque on Connections	2 Nm
Tightening Torque on Heatsink	4 Nm

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	-55 °C to +125 °C IEC 60695-11-5
Flammability	2 applications 30 s separated by 60 s

TECHNICAL SPECIFICATIONS

Rated Power (P_{70}) Chassis Mounted at 70 °C (Case Temperature)	500 W continuous load
Thermal Resistance of the Component	$R_{th(j-c)}$: 0.11 °C/W
Temperature Coefficient	$\pm 300 \text{ ppm}/^\circ\text{C} < 1 \Omega$ $\pm 150 \text{ ppm}/^\circ\text{C} > 1 \Omega$
Dielectric Strength	L: 7 kV _{RMS} - H: 12 kV _{RMS} MIL STD 202 Method 301: 1 min/10 mA max.
Insulation Resistance	$> 10^6 \text{ M}\Omega$ under $U_{ins} = 500 \text{ V}_{DC}$ IEC 60115-1
Inductance	$< 50 \text{ nH}$

PERFORMANCE		
TESTS	CONDITIONS	REQUIREMENTS
Momentary Overload	EN 60115-1 2 Pr / 10 s $U_L = 5000 \text{ V}$	$< \pm (0.25 \% + 0.05 \Omega)$
Rapid Temperature Change	IEC 60115-1 / IEC60068-2-14 Test Na 5 cycles, -55 °C to +125 °C	$< \pm (0.25 \% + 0.05 \Omega)$
Load Life	IEC 60115-1 Pr (i.e. 500 W) / 1000 h / 70 °C (no cycling) ⁽¹⁾	$< \pm (0.5 \% + 0.05 \Omega)$
Humidity (Steady State)	MIL STD 202 Method 103 B and D 56 days, 95 % RH / 40 °C	$< \pm (0.5 \% + 0.05 \Omega)$

Note

⁽¹⁾ Resistors are not tested and guaranteed in cycling conditions

RESISTANCE VALUE IN RELATION TO TOLERANCE AND TCR		
Resistance Values	$< 1 \Omega$	$> 1 \Omega$
Standard Tolerances	$\pm 5 \%$	
Standard TCR (-55 °C to +125 °C)	$\pm 300 \text{ ppm/}^\circ\text{C}$	$\pm 150 \text{ ppm/}^\circ\text{C}$
Tolerance on Request	$\pm 1 \%, \pm 2 \%, 10 \%$	

RECOMMENDATIONS FOR MOUNTING ONTO A HEATSINK

- Surfaces in contact must be carefully cleaned.
- The heatsink must have an acceptable flatness: From 0.05 mm to 0.1 mm/100 mm.
- Roughness of the heatsink must be around 6.3 μm . In order to improve thermal conductivity, surfaces in contact (alumina, heatsink) are coated with a silicone grease (type SI 340 from Rhône-Poulenc or Dow 340 from Dow Corning).
- The fastening of the resistor to the heatsink is under pressure control of two screws tightened at 4 Nm for full power availability.

Tightening Torque on Heatsink	RPS 500
	4 Nm

- The following accessories are supplied with each product: 2 off CHC M4 x 16/16 class 8.8 for heatsink mounting, 2 off TH M4 x 6/6 and 2 M4 contact lock washers for connections.

CHOICE OF THE HEATSINK

The user must choose according to the working conditions of the component (power, room temperature).

Maximum working temperature must not exceed 125 °C.

The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{th(j-c)}] + [R_{th(c-h)}] + [R_{th(h-a)}]}$$

P: Expressed in W

ΔT : Difference between maximum working temperature and room temperature

$R_{th(j-c)}$: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component: 0.11 °C/W.

$R_{th(c-h)}$: Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device.

$R_{th(h-a)}$: Thermal resistance of the heatsink.



OVERLOADS


Short time overload: 2 Pr/10 s

Accidental overload: The values indicated in the graph below are applicable to resistors in air or mounted onto a heatsink.


MARKING

Model, style, resistance value (in Ω), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

ENERGY CURVE

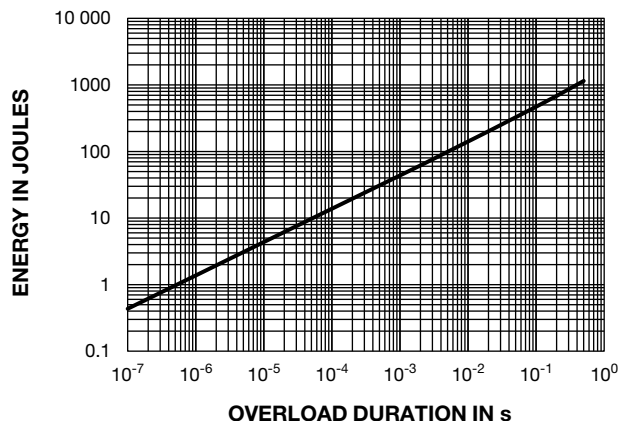


POWER CURVE

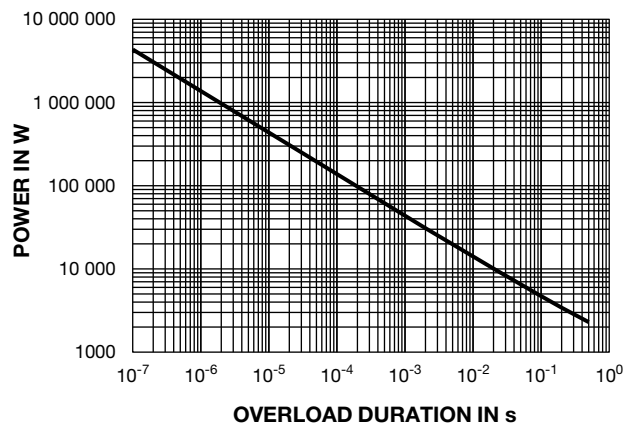

POWER RATING

The heatsink temperature should be maintained at the values specified in fig. 2.

To optimize the thermal conduction, contacting surfaces should be coated with silicone grease and heatsink mounting screws tightened to 4 Nm.

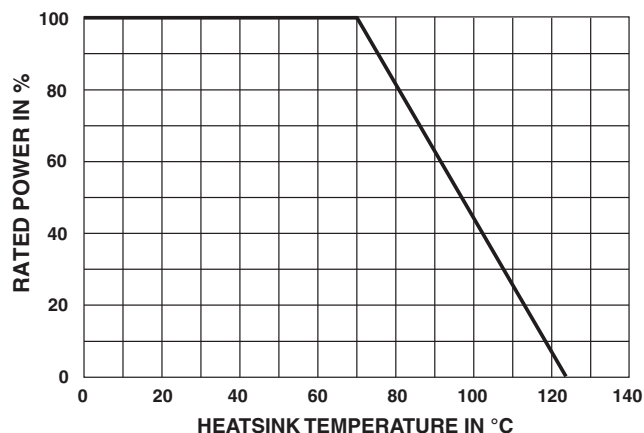

PACKAGING

Box of 15 units

**ORDERING INFORMATION**

RPS	500	DH	100 k Ω	$\pm 10\%$	xxx	BO15	e
MODEL	STYLE	CONNECTIONS	RESISTANCE VALUE	TOLERANCE	CUSTOM DESIGN	PACKAGING	LEAD (Pb)-FREE
		optional			optional		
		H: dielectric		$\pm 1\%$	on request:		
		strength 12 kV		$\pm 2\%$	special TCR,		
		L: dielectric		$\pm 5\%$	shape etc.		
		strength 7 kV		$\pm 10\%$			

GLOBAL PART NUMBER INFORMATION

R	P	S	0	5	0	0	D	H	4	7	R	0	J	B	
GLOBAL MODEL	STYLE	DIELECTRIC	OHMIC VALUE				TOLERANCE	PACKAGING			SPECIAL				
RPS500	D = diagonal connections A = straight connections	H : dielectric strength 12 kV L : dielectric strength 7 kV	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. 48R70 = 48.7 Ω 47R0 = 47 Ω 1001 = 1 k Ω 4R70 = 4.7 Ω R240 = 0.24 Ω				F = 1 % G = 2 % J = 5 % K = 10 %	B = box 15 pieces N = box 15 pieces N/A (1 to 14 pieces by box)			As applicable ZAx.				

RELATED DOCUMENTS**APPLICATION NOTES**

Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

RPS0500DH68R0JB	RPS0500DH1001JB	RPS0500DH1R00JB	RPS0500DL2R50JB	RPS0500DL16R0JN
RPS0500DLR430JN	RPS0500DHR500JB	RPS0500DLR820KB	RPS0500DH1R75GN	RPS0500DH4R00FB
RPS0500DH2R50JB	RPS0500DL4R70JB	RPS0500DL11R0FB	RPS0500DH2200JN	RPS0500DH4700JN
RPS0500DLR240GB	RPS0500DL6802JB	RPS0500DHR240JN	RPS0500DH1R60JB	RPS0500DH1000JN
RPS0500DH4R70JN	RPS0500DL4701KN	RPS0500DL47R0JB	RPS0500DLR620JB	RPS0500DH2202KN
RPS0500DH47R0JN	RPS0500DH20R0JB	RPS0500DH12R5FN	RPS0500DH6802JB	RPS0500DL5R60FN
RPS0500DL15R0FB	RPS0500DH3302KB	RPS0500DH33R0JB	RPS0500DLR330JN	RPS0500DLR820KN
RPS0500DH1R25GN	RPS0500DLR270GN	RPS0500DL7R50JB	RPS0500DL4700KB	RPS0500DH3R60JB
RPS0500DH1500JN	RPS0500DL4R70KN	RPS0500DL2000JN	RPS0500DH3002KN	RPS0500AL4R70JN
RPS0500DH13R0JB	RPS0500DL30R0JB	RPS0500DHR500GB	RPS0500DH2202JB	RPS0500DH90R0FB
RPS0500DH9R00FN	RPS0500DH6803KN	RPS0500DH2R00JN	RPS0500DL1002JB	RPS0500DL22R0JB
RPS0500DHR330JB	RPS0500DLR240KB	RPS0500DH4700KB	RPS0500DH22R0KN	RPS0500DH4R70KB
RPS0500DH2202KB	RPS0500DL1001KB	RPS0500DL33R0JN	RPS0500DH3R30JB	RPS0500DH1R00JN
RPS0500DL4R70KB	RPS0500DH1R50JN	RPS0500DH3R30JN	RPS0500DL4R00JB	RPS0500DHR240JB
RPS0500DH13R0KB	RPS0500DH10R0FB	RPS0500DLR470JN	RPS0500DL2R70FN	RPS0500DL11R0FN
RPS0500DH4700GN	RPS0500DH3901JB	RPS0500DH4701KB	RPS0500DH1000KB	RPS0500DH10R0JN
RPS0500DH2R30FB	RPS0500DH33R0KB	RPS0500DL3R00JB	RPS0500DH1002KB	RPS0500DL1002JN
RPS0500DH3R60JN	RPS0500DL11R0JB	RPS0500DL33R0KB	RPS0500DH33R0KN	