


50 W Power Resistor, Thick Film Technology, TO-220



FEATURES

- 50 W at 25 °C heatsink mounted
- Adjusted by sand trimming
- Leaded or surface mount versions
- High power to size ratio
- Non inductive element
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT

DESIGN SUPPORT TOOLS

[click logo to get started](#)
3D
Models
Available

Because of the knowledge and experience in Thick Film technology, Vishay Sfernice has been able to develop a high power resistor in a TO-220 package called RTO 50. The special design of this component allows the dissipation of 50 W when mounted on a heatsink.

DIMENSIONS in millimeters

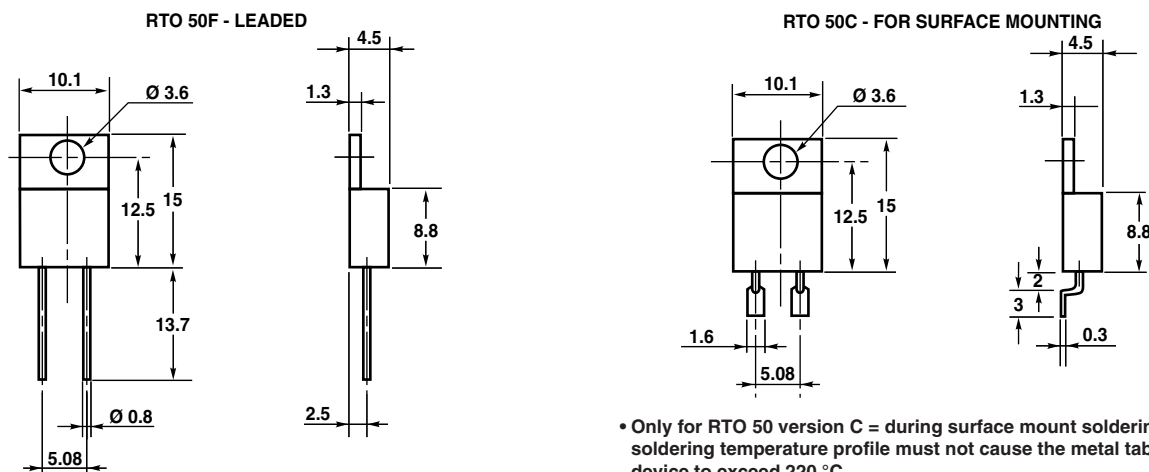

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE	RESISTANCE RANGE Ω	RATED POWER $P_{25\text{ °C}}$ W	LIMITING ELEMENT VOLTAGE U_L V	TOLERANCE ± %	TEMPERATURE COEFFICIENT ± ppm/°C	CRITICAL RESISTANCE Ω
RTO 50	TO-220	0.010 to 550K ⁽¹⁾	50	500	1, 2, 5, 10	150	5K

Note
⁽¹⁾ E24 series

MECHANICAL SPECIFICATIONS

Mechanical Protection	Molded
Resistive Element	Thick film
Connections	Tinned copper alloy
Weight	2.2 g max.

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	-55 °C to 155 °C
Climatic Category	55 / 155 / 156
Sealing	Sealed container, solder immersion
Flammability	IEC 60695-11-5, 2 applications 30 s separated by 60 s

Note

- Not compatible with RoHS reflow profile

TECHNICAL SPECIFICATIONS

Dissipation and Associated	Onto a heatsink
Thermal Resistance and Nominal Power	50 W at +25 °C $R_{TH(j-c)}$: 2.6 °C/W Free air: 2.25 W at +25 °C
Dielectric Strength MIL STD 202 (301)	2000 V _{RMS} - 1 min 10 mA max.
Insulation Resistance	≥ 10 ⁶ MΩ
Inductance	≤ 0.1 μH

DIMENSIONS

Standard Package	TO-220 insulated case
------------------	-----------------------

PERFORMANCE		
TESTS	CONDITIONS	REQUIREMENTS
Momentary Overload	EN 60115-1 2 Pr 5 s for $R < 2 \Omega$ 1.6 Pr 5 s for $R \geq 2 \Omega$ $U_S < 1.5 U_L$	$\pm (0.25 \% + 0.05 \Omega)$
Rapid Temperature Change	EN 60115-1 60 068-2-14 5 cycles -55 °C to +155 °C	$\pm (0.5 \% + 0.05 \Omega)$
Load Life	EN 60115-1 Pr at +25 °C, 1000 h CEI 115_1	$\pm (1 \% + 0.05 \Omega)$
Humidity (Steady State)	EN 60115-1 56 days RH 95 %	$\pm (0.5 \% + 0.05 \Omega)$
Vibration	MIL STD 202 method 204 C test D	$\pm (0.2 \% + 0.05 \Omega)$
Terminal Strength	MIL STD 202 method 211 test A1	$\pm (0.2 \% + 0.05 \Omega)$

RESISTANCE VALUE IN RELATION TO TOLERANCE AND TCR				
Resistance Values	$\geq 0.01 \Omega$	$\geq 0.015 \Omega$	$\geq 0.1 \Omega$	$\geq 0.5 \Omega$
Tolerances	$\pm 1 \% \text{ at } \pm 10 \%$			
Temperature Coefficient (-55 °C to +155 °C)	Standard	$\pm 900 \text{ ppm}/^\circ\text{C}$	$\pm 700 \text{ ppm}/^\circ\text{C}$	$\pm 250 \text{ ppm}/^\circ\text{C}$
		$\pm 150 \text{ ppm}/^\circ\text{C}$		

CHOICE OF THE HEATSINK

The user must choose according to the working conditions of the component (power, room temperature).

Maximum working temperature must not exceed 155 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{R_{TH(j-c)} + R_{TH(c-h)} + R_{TH(h-a)}} \quad (1)$$

P:	Expressed in W
ΔT :	Difference between maximum working temperature and room temperature
$R_{TH(j-c)}$:	Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component: (Special Features Table)
$R_{TH(c-h)}$:	Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device
$R_{TH(h-a)}$:	Thermal resistance of the heatsink

Example:

$R_{TH(c-a)}$: For RTO 50 power rating 13 W at ambient temperature +30 °C

Thermal resistance $R_{TH(j-c)}$: 2.6 °C/W

Considering equation (1) we have:

$$\Delta T \leq 155 \text{ °C} - 30 \text{ °C} = 125 \text{ °C}$$

$$R_{TH(j-c)} + R_{TH(c-h)} + R_{TH(h-a)} = \frac{\Delta T}{P} = \frac{125}{13} = 9.6 \text{ °C/W}$$

$$R_{TH(c-a)} + R_{TH(h-a)} \leq 9.6 \text{ °C/W} - 2.6 \text{ °C/W} \leq 7 \text{ °C/W}$$



OVERLOADS


The applied voltage must always be lower than the maximum overload voltage of 750 V.

The values indicated on the graph below are applicable to resistors in air or mounted onto a heatsink.


MARKING

Model, style, resistance value (in Ω), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

ENERGY CURVE

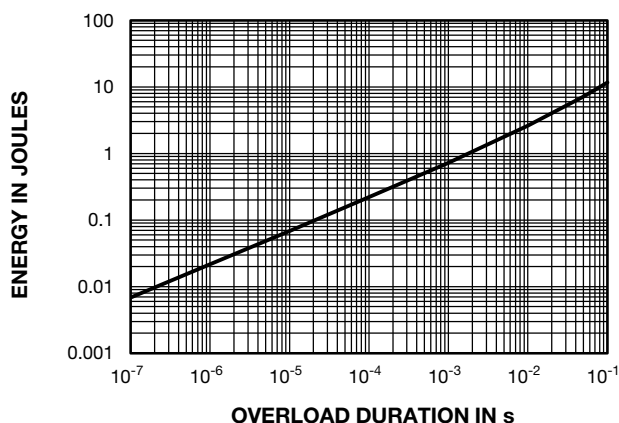


POWER CURVE

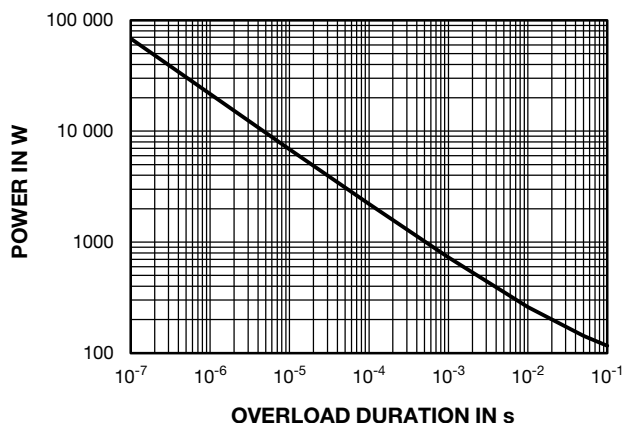

POWER RATING

The temperature of the heatsink should be maintained within the limits specified.

To improve the thermal conductivity, surfaces in contact should be coated with a silicone grease and the torque applied on the screw for tightening should be around 1 Nm.

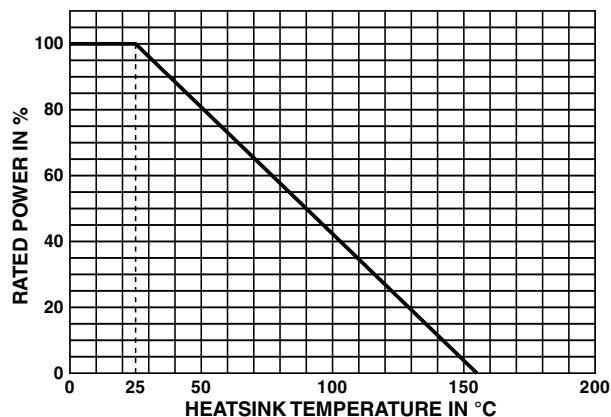

PACKAGING

Tube of 50 units



ORDERING INFORMATION

RTO	50	F	100K	± 1%	XXX	TU50	e1
MODEL	STYLE	CONNECTIONS	RESISTANCE VALUE	TOLERANCE	CUSTOM DESIGN	PACKAGING	LEAD (Pb)-FREE
		F: radial leads C: surface mount		± 1% ± 2% ± 5% ± 10%	optional on request: special TCR, shape, etc.		

GLOBAL PART NUMBER INFORMATION

R	T	O	0	5	0	F	R	6	8	0	0	J	T	E	1
GLOBAL MODEL	SIZE	LEADS	OHMIC VALUE				TOLERANCE	PACKAGING							
RTO	050	F = radial leads C = surface mount	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. 48R70 = 48.7 Ω 48701 = 48 700 Ω 10002 = 100 000 Ω R0100 = 0.01 Ω R6800 = 0.68 Ω 27000 = 2700 Ω = 2.7 kΩ				F = 1 % G = 2 % J = 5 % K = 10 %	T = tube Size 30 and 50: tube 50 pieces							

RELATED DOCUMENTS

APPLICATION NOTES

Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

RTO050CR1000FTE1	RTO050F15000JTE1	RTO050F1R370FTE1	RTO050FR0500JTE1	RTO050FR0680JTE1
RTO050FR1000JTE1	RTO050F10000JTE1	RTO050F10001JTE1	RTO050F100R0JTE1	RTO050F10R00JTE1
RTO050F12R00JTE1	RTO050F1R000JTE1	RTO050F22R00JTE1	RTO050F2R000JTE1	RTO050F2R200JTE1
RTO050F330R0JTE1	RTO050F3R900JTE1	RTO050F47000JTE1	RTO050F47R00JTE1	RTO050F4R700JTE1
RTO050F56R00JTE1	RTO050F680R0JTE1	RTO050FR2000JTE1	RTO050F5R000JTE1	RTO050FR5000JTE1
RTO050F1R300JTE1	RTO050F15R00JTE1	RTO050FR1500JTE1	RTO050F20001FTE1	RTO050F1R500FTE1
RTO050FR5000FTE1	RTO050F30R00JTE1	RTO050F8R000FTE1	RTO050F1R500JTE1	RTO050F10R00FTE1
RTO050F470R0JTE1	RTO050C10R00JTE1	RTO050F2R550FTE1	RTO050C150R0FTE1	RTO050C330R0FTE1
RTO050C1R000FTE1	RTO050C30R00JTE1	RTO050C47R00JTE1	RTO050C75R00JTE1	RTO050CR1000FTE1
RTO050F1R000FTE1	RTO050F1R200FTE1	RTO050F2R400FTE1	RTO050F33001FTE1	RTO050F330R0FTE1
RTO050F47R00FTE1	RTO050F6R800FTE1	RTO050F20R00JTE1	RTO050F220R0JTE1	RTO050F27000JTE1
RTO050F39R00JTE1	RTO050F3R300JTE1	RTO050F47001JTE1	RTO050F68000JTE1	RTO050F7R500JTE1
RTO050F82R00JTE1	RTO050F3R000FTE1	RTO050F16R00FTE1	RTO050F20R00FTE1	RTO050F28R00FTE1
RTO050F2R100FTE1	RTO050F2R700JTE1	RTO050F2R800FTE1	RTO050F2R900FTE1	RTO050F20001JTE1
RTO050F8R000JTE1	RTO050F5R000FTE1	RTO050F4R530FTE1	RTO050F63R40FTE1	RTO050F6R980FTE1
RTO050C2R000FTE1	RTO050C30R00FTE1	RTO050CR0500FTE1	RTO050F16R00JTE1	RTO050F46R40FTE1
RTO050F75R00JTE1	RTO050FR6800FTE1	RTO050F4R320FTE1	RTO050F39001JTE1	RTO050F200R0JTE1
RTO050F30000JTE1	RTO050F27R00FTE1	RTO050F36001FTE1	RTO050F51001FTE1	RTO050F1R500GTE1
RTO050C33000KTE1	RTO050F7R500GTE1			