

Smart Dupline® Decentralized Analog Output Module Type SHPOUTV224

CARLO GAVAZZI



- 2 x 0-10 VDC analog outputs
- 24 VDC
- Small dimension housing for a decentralized installation inside wall-box or environmental sensor housings
- Smart Dupline® protocol
- Operates only with Sx2WEB controller

Product Description

SHPOUTV224 is an output module with 2 analog outputs. The compact size of the module makes it possible to fit it into a wall-box or an environmental sensor housing, thereby enabling a decentralized installation concept where the Dupline® bus and DC power are multi-dropped from sensor to sensor. This simplifies

the wiring compared to traditional star wiring connections, reduces the number of DDCs and sub-panels required, and provides a higher flexibility for last-minute changes and enhancements. The module has 2 x 0-10 VDC outputs. It is fully programmable via the SH tool.

Ordering Key

SH P OUT V 2 24

Smart Dupline® _____
Decentralized module _____
Output module _____
Voltage output _____
Number of outputs _____
Power supply _____

Type Selection

Output module

2

Type

0-10V

Supply: 24 VDC ± 20%

SHPOUTV224

Supply Specifications

Power Supply

Operational voltage range
Max ripple
Reverse polarity protection
Overvoltage category

Rated impulse voltage

Typ. current consumption
Power on delay
Power off delay

24 VDC ±20%
1 V
Yes
Overvoltage cat. II (IEC 60664-1, par. 4.3.3.2)
500 V (1.2/50µs) (IEC 60664-1, tab. F.1)
15 mA
≤ 2 s
≤ 1 s

Specifications for Analog outputs

Output 1 and 2

Output type
Inaccuracy

Cable length
Load, each channel

2 x 0-10 VDC
< 0.5% fs (over entire temp. range)
< 5 m
max 1.5 mA

Dupline® Specifications

Voltage	8.2 V
Maximum Dupline® voltage	10 V
Minimum Dupline® voltage	5.5 V
Maximum Dupline® current	1.5 mA
Analog protocol	Smart Dupline®




General Specifications


Environment	
Pollution degree	2(IEC 60664-1, par. 4.6.2)
Operating temperature	0 to +50°C (-4 to +122°F)
Storage temperature	-50 to +85°C (-58 to + 185°F)
Humidity (non-condensing)	20 - 90%
Housing	
Material	Macromel
Colour	Ambra
Dimensions (h x w x d)	50 x 30 x 18 mm
Weight	50 g
Protection degree	IP20
Terminal block	
Power supply input	4 x spring terminal
Dupline® bus	4 x spring terminal
Cross-sectional area	Terminal: 1.5 mm²
Cable x 4	
5	(GND)
6	Out 2
7	GND
8	Out 1
Wire cross section	0.14 mm²
Wire length	0.25 m

EMC	
Immunity	EN61000-6-2
- Electrostatic discharge	EN61000-4-2
- Radiated radiofrequency	EN61000-4-3
- Burst immunity	EN61000-4-4
- Surge	EN61000-4-5
- Conducted radiofrequency	EN61000-4-6
- Power frequency magnetic fields	EN61000-4-8
- Voltage dips, variations, interruptions	EN61000-4-11
Emission	
- Conducted and radiated emissions	CISPR 22 (EN55022), cl.B
- Conducted emissions	CISPR 16-2-1 (EN55016-2-1)
- Radiated emissions	CISPR 16-2-3 (EN55016-2-3)
Approvals	
UL60950	CE cULus according to

Wiring Diagram

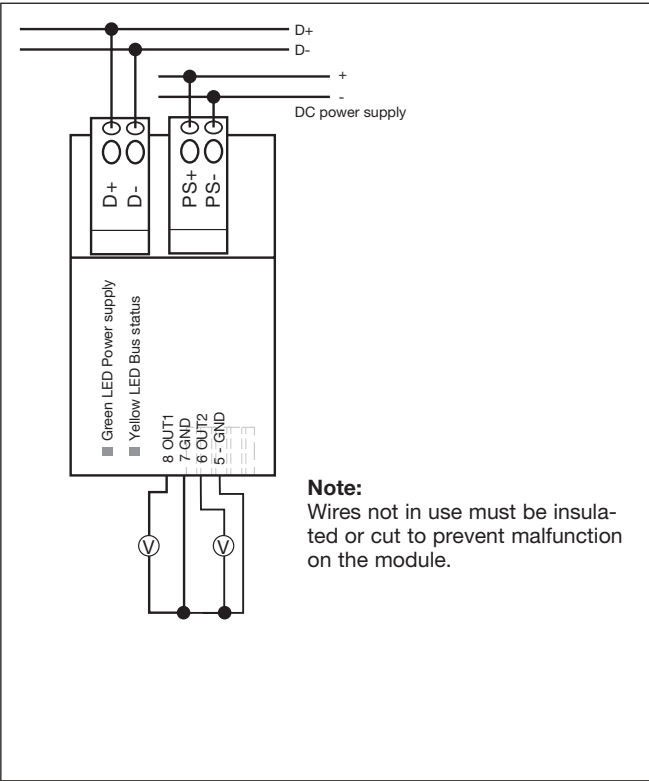

Dimensions

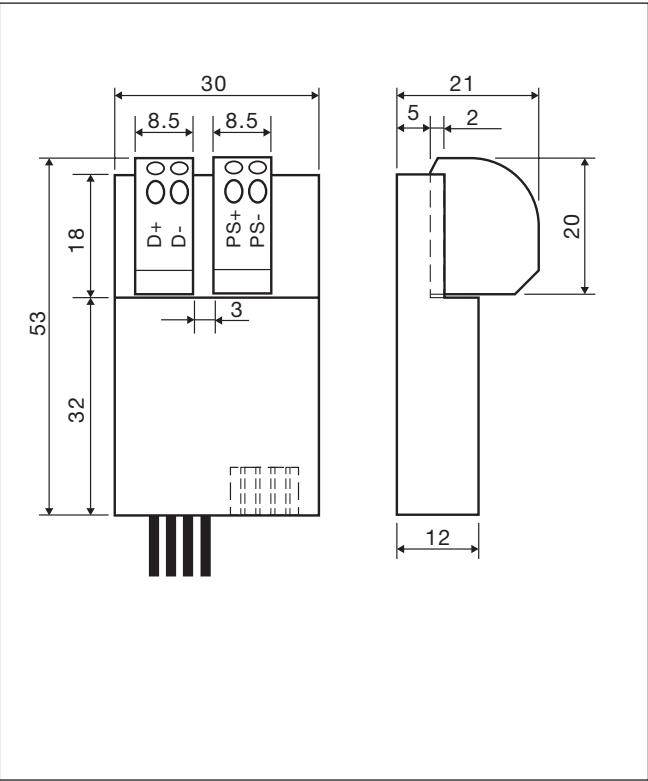

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[SHPOUTV224](#)